


Selection diagram



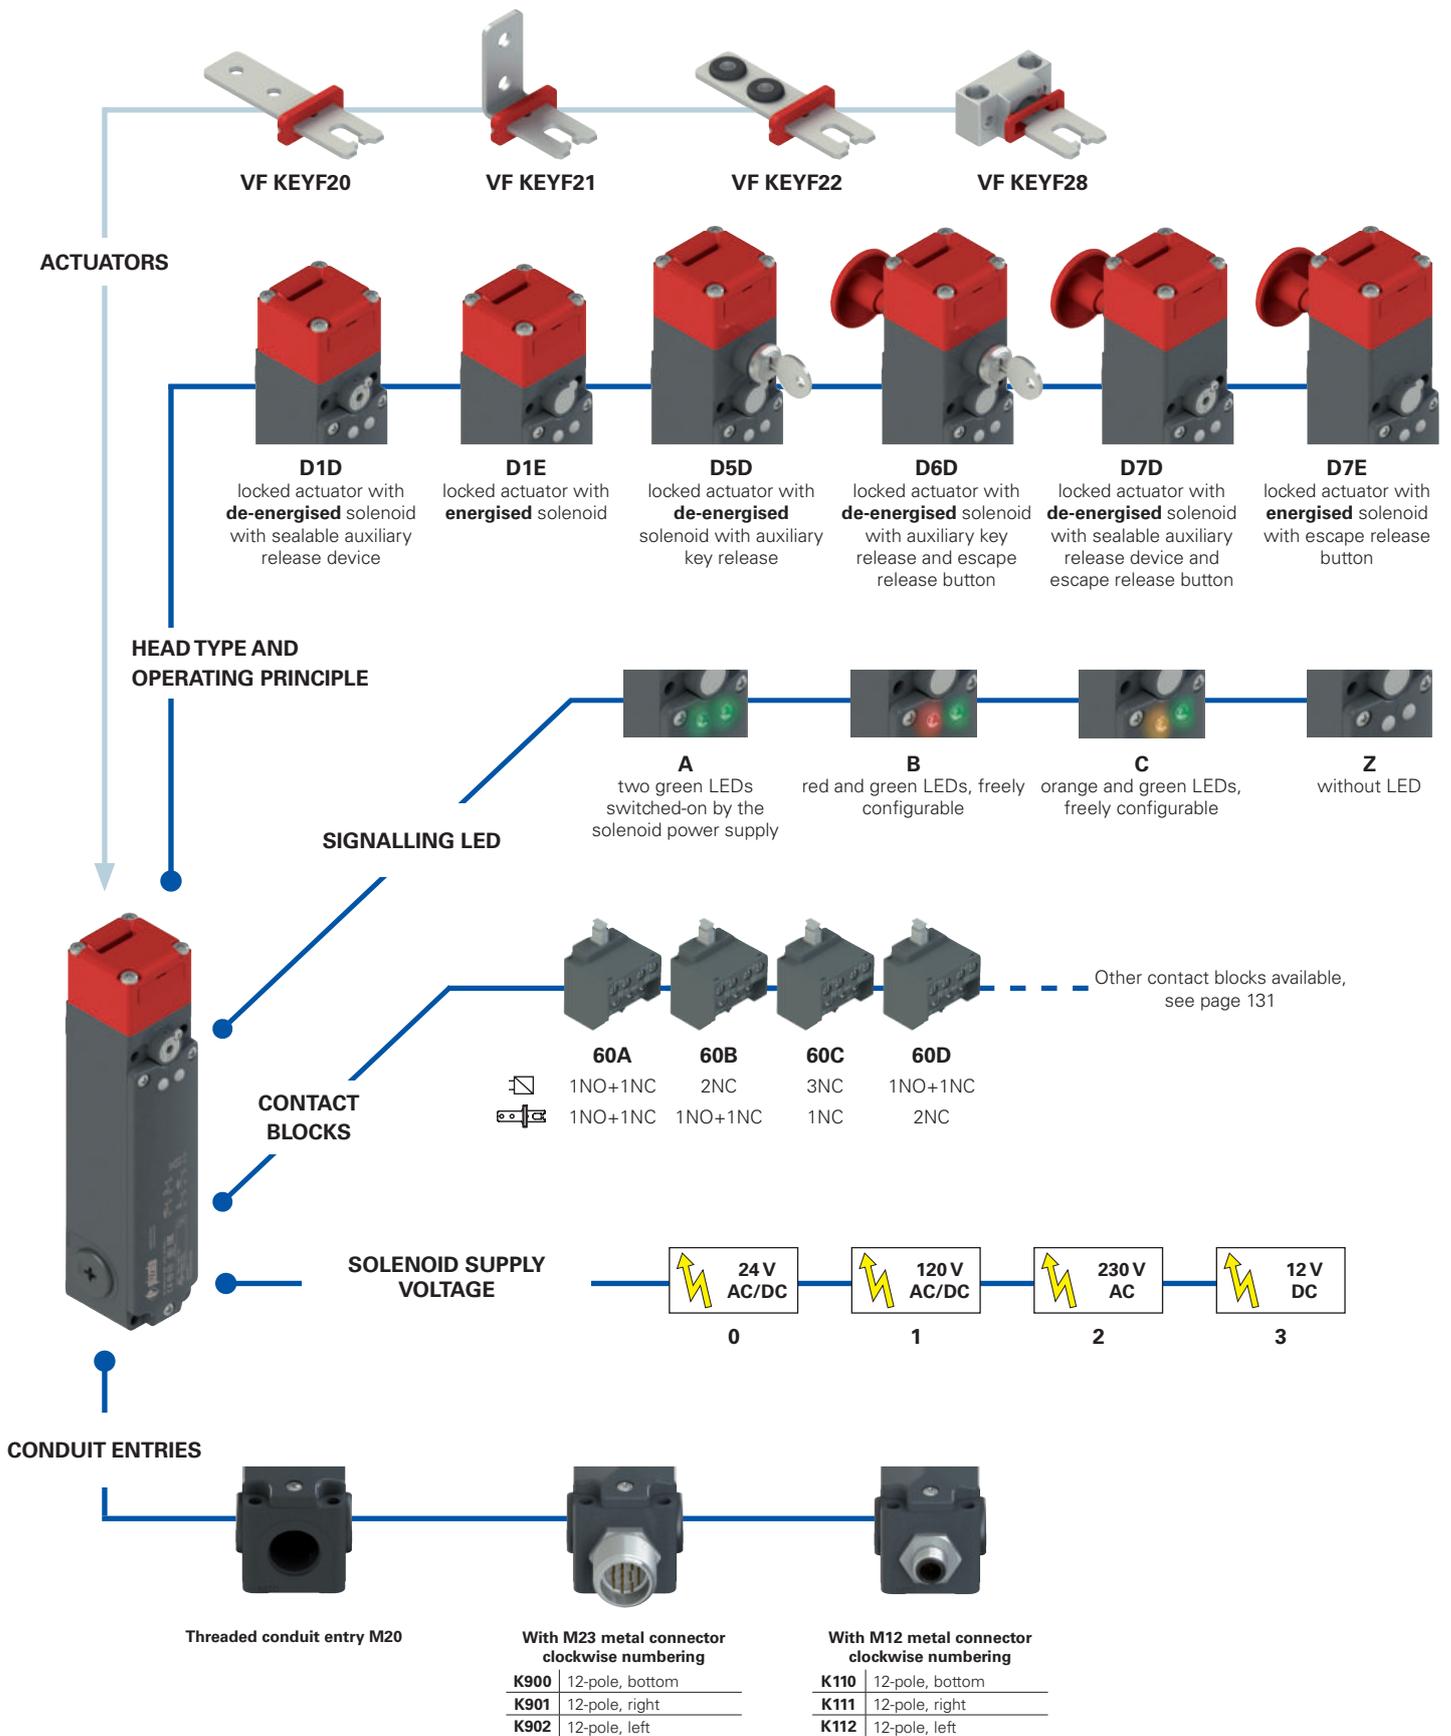

## Code structure

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options

# FG 60AD1D0A-LP30F20GK900T6V34

## Contact blocks

	Contacts activated by the solenoid	Contacts activated by the actuator
<b>60A</b>	1NO+1NC	1NO+1NC
<b>60B</b>	2NC	1NO+1NC
<b>60C</b>	3NC	1NC
<b>60D</b>	1NO+1NC	2NC
<b>60E</b>	1NO+2NC	1NC
<b>60F</b>	1NO+2NC	1NO
<b>60G</b>	2NC	2NC
<b>60H</b>	4NC	/
<b>60I</b>	3NC	1NO
<b>60L</b>	2NO+1NC	1NC
<b>60M</b>	2NO+1NC	1NO
<b>60N</b>	1NO+1NC	2NO
<b>60P</b>	1NC	3NC
<b>60R</b>	2NO+2NC	/
<b>60S</b>	1NC	2NO+1NC
<b>60T</b>	1NC	1NO+2NC
<b>60U</b>	/	4NC
<b>60V</b>	2NC	2NO
<b>60X</b>	1NO	3NC
<b>60Y</b>	1NO	1NO+2NC
<b>61A</b>	/	1NO+3NC
<b>61B</b>	/	2NO+2NC
<b>61C</b>	/	3NO+1NC
<b>61D</b>	1NC	3NO
<b>61E</b>	1NO	2NO+1NC
<b>61G</b>	2NO	1NO+1NC
<b>61H</b>	2NO	2NC
<b>61M</b>	3NO	1NC
<b>61R</b>	1NO+3NC	/
<b>61S</b>	3NO+1NC	/

**Note:** contact blocks 60U, 61A, 61B, 61C cannot be combined with operating principles D6D, D7D, D7E.

## Operating principle

<b>D1D</b>	locked actuator with de-energised solenoid. With sealable auxiliary release device.
<b>D1E</b>	locked actuator with energised solenoid
<b>D5D</b>	locked actuator with de-energised solenoid. With auxiliary key release.
<b>D6D</b>	locked actuator with de-energised solenoid. With auxiliary key release and escape release button.
<b>D7D</b>	locked actuator with de-energised solenoid. With sealable auxiliary release device and escape release button.
<b>D7E</b>	locked actuator with energised solenoid. With escape release button

## Auxiliary release options

(only for articles FG **D5D**, FG **D6D**)

	The key can be removed in locked and unlocked actuator position (standard)
<b>V34</b>	The key can be removed only in the locked position of the actuator
<b>V70</b>	Key release with triangular key with spring return
<b>V73</b>	Key release with triangular key, no spring return

## Ambient temperature

-25°C ... +60°C (standard)

**T6** -40°C ... +60°C

## Pre-installed connectors

without connector (standard)

**K900** M23 metal connector, 12-pole, bottom

...

**K110** M12 metal connector, 12-pole, bottom

...

For the complete list of possible combinations please contact our technical department.

## Contact type

silver contacts (standard)

**G** silver contacts with 1 µm gold coating

## Actuators

without actuator (standard)

**F20** straight actuator VF KEYF20**F21** angled actuator VF KEYF21**F22** actuator with rubber pads VF KEYF22**F28** universal actuator VF KEYF28

## Release button length

for max. 15 mm wall thickness (standard)

**LP30** for max. 30 mm wall thickness**LP40** for max. 40 mm wall thickness**LP60** for max. 60 mm wall thickness**LPRG** adjustable, for wall thickness from 60 mm to 500 mm

## Signalling LEDs

**A** two green LEDs switched-on by the solenoid power supply**B** red and green LEDs, freely configurable**C** orange and green LEDs, freely configurable**Z** without LED

## Solenoid supply voltage

**0** 24 Vac/dc (-10% ... +10%)**1** 120 Vac/dc (-15% ... +10%)**2** 230 Vac (-15% ... +10%)**3** 12 Vdc (-10% ... +10%)



### Main features

- Actuator holding force  $F_{1max}$ : 3000 N
- 30 contact blocks with 4 contacts
- Metal housing, three M20 conduit entries
- Protection degree IP67
- Versions with key release and escape release button
- 4 stainless steel actuators
- Head and release devices, individually turnable and non-detachable
- Signalling LEDs
- Operation with energised or de-energised solenoid

### Quality marks:



IMQ approval:	CA02.03808
UL approval:	E131787
CCC approval:	2021000305000103
EAC approval:	RU C-IT.YT03.B.00035/19

### Technical data

#### Housing

Metal head and housing, baked powder coating.	
Three threaded conduit entries:	M20x1.5 (standard)
Protection degree:	IP67 acc. to EN 60529 with cable gland of equal or higher protection degree

#### General data

SIL (SIL CL) up to:	SIL 3 acc. to EN 62061
Performance Level (PL) up to:	PL e acc. to EN ISO 13849-1
Interlock with mechanical lock, coded:	type 2 acc. to EN ISO 14119
Coding level:	low acc. to EN ISO 14119
Safety parameters:	
$B_{10D}$ :	5,000,000 for NC contacts
Mission time:	20 years
Ambient temperature:	-25°C ... +60°C (standard) -40°C ... +60°C (T6 option)
Max. actuation frequency:	600 operating cycles/hour
Mechanical endurance:	1 million operating cycles
Max. actuation speed:	0.5 m/s
Min. actuation speed:	1 mm/s
Maximum force before breakage $F_{1max}$ :	3000 N acc. to EN ISO 14119
Max. holding force $F_{Zh}$ :	2300 N acc. to EN ISO 14119
Maximum clearance of locked actuator:	4.5 mm
Released actuator extraction force:	30 N
Tightening torques for installation:	see page 441
Wire cross-sections and wire stripping lengths:	see page 465

#### Solenoid

Duty cycle:	100% ED (continuous operation)
Solenoid consumption:	9 VA

#### In compliance with standards:

IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, IEC 61000-6-2, IEC 61000-6-3, EN IEC 63000, BG-GS-ET-15, BG-GS-ET-19, UL 508, CSA C22.2 No. 14.

#### Approvals:

EN 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5

#### Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

#### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

**⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 443 to 454.**

### Electrical data

### Utilization category

without connector	with M23 connector, 12-pole	with M12 connector, 12-pole	
Thermal current ( $I_{th}$ ):	10 A	8 A	1.5 A
Rated insulation voltage (U):	400 Vac 300 Vdc	250 Vac 300 Vdc	30 Vac 36 Vdc
Rated impulse withstand voltage ( $U_{imp}$ ):	6 kV	type gG fuse 8 A 500 V	type gG fuse 1.5 A
Conditional short circuit current:	1000 A acc. to EN 60947-5-1	3	3
Protection against short circuits:	type gG fuse 10 A 500 V		
Pollution degree:	3		
			Alternating current: AC15 (50÷60 Hz)
			$U_e$ (V) 120 250 400
			$I_e$ (A) 6 5 3
			Direct current: DC13
			$U_e$ (V) 24 125 250
			$I_e$ (A) 3 0.7 0.4
			Alternating current: AC15 (50÷60 Hz)
			$U_e$ (V) 120 250
			$I_e$ (A) 6 5
			Direct current: DC13
			$U_e$ (V) 24 125 250
			$I_e$ (A) 3 0.7 0.4
			Alternating current: AC15 (50÷60 Hz)
			$U_e$ (V) 24
			$I_e$ (A) 1.5
			Direct current: DC13
			$U_e$ (V) 24
			$I_e$ (A) 1.5



### Features approved by IMQ

Rated insulation voltage (U<sub>i</sub>): 400 Vac  
 Conventional free air thermal current (I<sub>th</sub>): 10 A  
 Protection against short circuits: type gG fuse 10 A 500 V  
 Rated impulse withstand voltage (U<sub>imp</sub>): 6 kV  
 Protection degree of the housing: IP67  
 MV terminals (screw terminals)  
 Pollution degree: 3  
 Utilization category: AC15  
 Operating voltage (U<sub>e</sub>): 400 Vac (50 Hz)  
 Operating current (I<sub>e</sub>): 3 A

Forms of the contact element: X+X+X+X, Y+Y+Y+Y, X+Y+Y+Y, X+X+Y+Y, X+X+X+Y  
 Positive opening of contacts on all contact blocks: 60A, 60B, 60C, 60D, 60E, 60F, 60G, 60H, 60I, 60L, 60M, 60N, 60P, 60R, 60S, 60T, 60U, 60V, 60X, 60Y, 61A, 61B, 61C, 61D, 61E, 61G, 61H, 61M, 61R, 61S

In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

### Features approved by UL

Electrical Ratings: A300 pilot duty (720 VA, 120-300 Vac)  
 Q300 pilot duty (69 VA, 125-250 Vdc)  
 Environmental Ratings: Types 1, 4X, 12, 13

Please contact our technical department for the list of approved products.

### Operating principle

The operating principle of these safety switches allows three different operating states:

- state A**: with inserted and locked actuator
- state B**: with inserted but not locked actuator
- state C**: with extracted actuator


All or some of these states can be monitored by means of electrical NO contacts or NC contacts with positive opening by selecting the appropriate contact blocks. In detail, contact blocks that have electric contacts marked with the symbol of the solenoid (  ) are switched in the transition between the state A and state B, while the electric contacts marked with the symbol of the actuator (  ) are switched between state B and state C.

#### Operating principle

Select from two operating principles for actuator locking:

- Operating principle D**: locked actuator with de-energised solenoid. The actuator is released by applying the power supply to the solenoid (see example of the operating phases).
- Operating principle E**: locked actuator with energised solenoid. The actuator is released by switching off the power supply to the solenoid. This version should only be used under certain conditions, since a power failure at the system will result in the immediate opening of the guard.

### Example: operating phases with FG 60AD1D0A-F21 (switch with operating principle D)

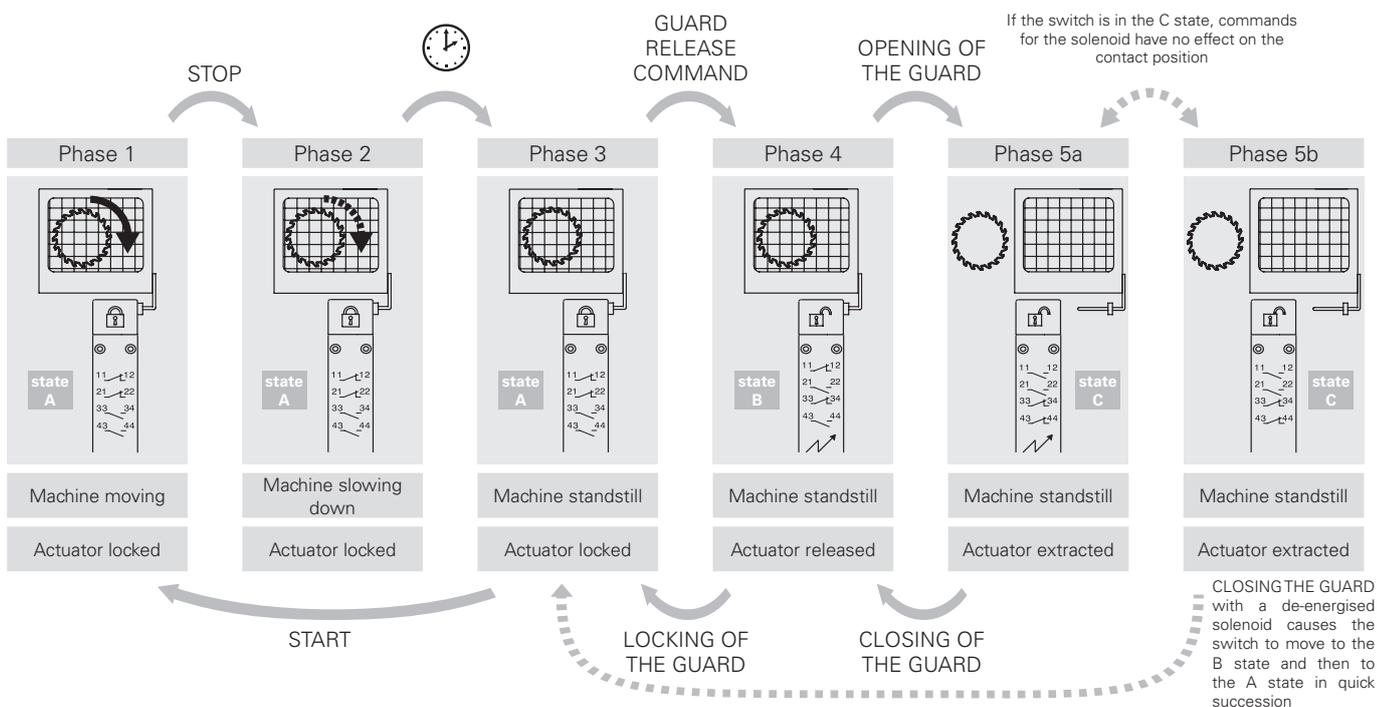




Contact positions related to switch states

Operating state Actuator Solenoid	Operating principle D locked actuator with de-energised solenoid			Operating principle E locked actuator with energised solenoid		
	state A	state B	state C	state A	state B	state C
	Inserted and locked De-energised	Inserted and released Energised	Extracted -	Inserted and locked Energised	Inserted and released De-energised	Extracted -
<b>FG 60A</b> ..... 1NO+1NC controlled by the solenoid 1NO+1NC controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34
<b>FG 60B</b> ..... 2NC controlled by the solenoid 1NO+1NC controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32
<b>FG 60C</b> ..... 3NC controlled by the solenoid 1NC controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32
<b>FG 60D</b> ..... 1NO+1NC controlled by the solenoid 2NC controlled by the actuator						
	13 — 14	13 — 14	13 — 14	13 — 14	13 — 14	13 — 14
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32
<b>FG 60E</b> ..... 1NO+2NC controlled by the solenoid 1NC controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32
<b>FG 60F</b> ..... 1NO+2NC controlled by the solenoid 1NO controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34
<b>FG 60G</b> ..... 2NC controlled by the solenoid 2NC controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32
<b>FG 60H</b> ..... 4NC controlled by the solenoid						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32
<b>FG 60J</b> ..... 3NC controlled by the solenoid 1NO controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32
<b>FG 60L</b> ..... 2NO+1NC controlled by the solenoid 1NC controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34
<b>FG 60M</b> ..... 2NO+1NC controlled by the solenoid 1NO controlled by the actuator						
	13 — 14	13 — 14	13 — 14	13 — 14	13 — 14	13 — 14
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34
<b>FG 60N</b> ..... 1NO+1NC controlled by the solenoid 2NO controlled by the actuator						
	13 — 14	13 — 14	13 — 14	13 — 14	13 — 14	13 — 14
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34
<b>FG 60P</b> ..... 1NC controlled by the solenoid 3NC controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32	31 — 32
<b>FG 60R</b> ..... 2NO+2NC controlled by the solenoid						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34
<b>FG 60S</b> ..... 1NC controlled by the solenoid 2NO+1NC controlled by the actuator						
	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12	11 — 12
	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22	21 — 22
	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34	33 — 34



Operating state	Operating principle D locked actuator with de-energised solenoid			Operating principle E locked actuator with energised solenoid		
	state A	state B	state C	state A	state B	state C
	Inserted and locked De-energised	Inserted and released Energised	Extracted -	Inserted and locked Energised	Inserted and released De-energised	Extracted -
Actuator						
Solenoid						
FG 60T..... 1NC controlled by the solenoid 1NO+2NC controlled by the actuator	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44
FG 60U..... 4NC controlled by the actuator	11  12 21  22 31  32 41  42	11  12 21  22 31  32 41  42	11  12 21  22 31  32 41  42	11  12 21  22 31  32 41  42	11  12 21  22 31  32 41  42	11  12 21  22 31  32 41  42
FG 60V..... 2NC controlled by the solenoid 2NO controlled by the actuator	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44
FG 60X..... 1NO controlled by the solenoid 3NC controlled by the actuator	13  14 21  22 31  32 41  42	13  14 21  22 31  32 41  42	13  14 21  22 31  32 41  42	13  14 21  22 31  32 41  42	13  14 21  22 31  32 41  42	13  14 21  22 31  32 41  42
FG 60Y..... 1NO controlled by the solenoid 1NO+2NC controlled by the actuator	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44
FG 61A..... 1NO+3NC controlled by the actuator	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44
FG 61B..... 2NO+2NC controlled by the actuator	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44
FG 61C..... 3NO+1NC controlled by the actuator	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44
FG 61D..... 1NC controlled by the solenoid 3NO controlled by the actuator	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44
FG 61E..... 1NO controlled by the solenoid 2NO+1NC controlled by the actuator	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44
FG 61G..... 2NO controlled by the solenoid 1NO+1NC controlled by the actuator	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44
FG 61H..... 2NO controlled by the solenoid 2NC controlled by the actuator	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44	11  12 21  22 33  34 43  44
FG 61M..... 3NO controlled by the solenoid 1NC controlled by the actuator	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44
FG 61R..... 1NO+3NC controlled by the solenoid	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44	11  12 21  22 31  32 43  44
FG 61S..... 3NO+1NC controlled by the solenoid	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44	13  14 21  22 33  34 43  44

Contact type  
 = slow action

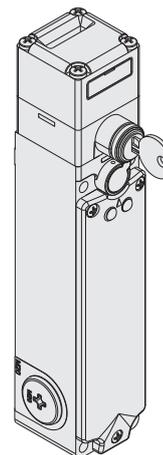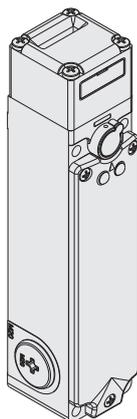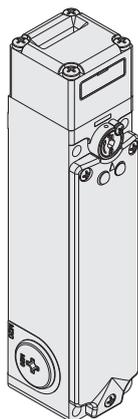

Operating principle	Operating principle D, with sealable auxiliary release device, without actuator	Operating principle E, without actuator	Operating principle D, with key release, without actuator
Contact block	 	 	 
60A 	FG 60AD1D0A   1NO+1NC 1NO+1NC	FG 60AD1E0A   1NO+1NC 1NO+1NC	FG 60AD5D0A   1NO+1NC 1NO+1NC
60B 	FG 60BD1D0A   2NC 1NO+1NC	FG 60BD1E0A   2NC 1NO+1NC	FG 60BD5D0A   2NC 1NO+1NC
60C 	FG 60CD1D0A   3NC 1NC	FG 60CD1E0A   3NC 1NC	FG 60CD5D0A   3NC 1NC
60D 	FG 60DD1D0A   1NO+1NC 2NC	FG 60DD1E0A   1NO+1NC 2NC	FG 60DD5D0A   1NO+1NC 2NC
60E 	FG 60ED1D0A   1NO+2NC 1NC	FG 60ED1E0A   1NO+2NC 1NC	FG 60ED5D0A   1NO+2NC 1NC
60F 	FG 60FD1D0A   1NO+2NC 1NO	FG 60FD1E0A   1NO+2NC 1NO	FG 60FD5D0A   1NO+2NC 1NO
60G 	FG 60GD1D0A   2NC 2NC	FG 60GD1E0A   2NC 2NC	FG 60GD5D0A   2NC 2NC
60H 	FG 60HD1D0A   4NC /	FG 60HD1E0A   4NC /	FG 60HD5D0A   4NC /
60I 	FG 60ID1D0A   3NC 1NO	FG 60ID1E0A   3NC 1NO	FG 60ID5D0A   3NC 1NO
60L 	FG 60LD1D0A   2NO+1NC 1NC	FG 60LD1E0A   2NO+1NC 1NC	FG 60LD5D0A   2NO+1NC 1NC
60M 	FG 60MD1D0A   2NO+1NC 1NO	FG 60MD1E0A   2NO+1NC 1NO	FG 60MD5D0A   2NO+1NC 1NO
60N 	FG 60ND1D0A   1NO+1NC 2NO	FG 60ND1E0A   1NO+1NC 2NO	FG 60ND5D0A   1NO+1NC 2NO
60P 	FG 60PD1D0A   1NC 3NC	FG 60PD1E0A   1NC 3NC	FG 60PD5D0A   1NC 3NC
60R 	FG 60RD1D0A   2NO+2NC /	FG 60RD1E0A   2NO+2NC /	FG 60RD5D0A   2NO+2NC /
60S 	FG 60SD1D0A   1NC 2NO+1NC	FG 60SD1E0A   1NC 2NO+1NC	FG 60SD5D0A   1NC 2NO+1NC
60T 	FG 60TD1D0A   1NC 1NO+2NC	FG 60TD1E0A   1NC 1NO+2NC	FG 60TD5D0A   1NC 1NO+2NC
60U 	FG 60UD1D0A  / 4NC	FG 60UD1E0A  / 4NC	FG 60UD5D0A  / 4NC
60V 	FG 60VD1D0A   2NC 2NO	FG 60VD1E0A   2NC 2NO	FG 60VD5D0A   2NC 2NO
60X 	FG 60XD1D0A  1NO 3NC	FG 60XD1E0A  1NO 3NC	FG 60XD5D0A  1NO 3NC
60Y 	FG 60YD1D0A  1NO 1NO+2NC	FG 60YD1E0A  1NO 1NO+2NC	FG 60YD5D0A  1NO 1NO+2NC
61A 	FG 61AD1D0A  / 1NO+3NC	FG 61AD1E0A  / 1NO+3NC	FG 61AD5D0A  / 1NO+3NC
61B 	FG 61BD1D0A  / 2NO+2NC	FG 61BD1E0A  / 2NO+2NC	FG 61BD5D0A  / 2NO+2NC
61C 	FG 61CD1D0A  / 3NO+1NC	FG 61CD1E0A  / 3NO+1NC	FG 61CD5D0A  / 3NO+1NC
61D 	FG 61DD1D0A   1NC 3NO	FG 61DD1E0A   1NC 3NO	FG 61DD5D0A   1NC 3NO
61E 	FG 61ED1D0A  1NO 2NO+1NC	FG 61ED1E0A  1NO 2NO+1NC	FG 61ED5D0A  1NO 2NO+1NC
61G 	FG 61GD1D0A  2NO 1NO+1NC	FG 61GD1E0A  2NO 1NO+1NC	FG 61GD5D0A  2NO 1NO+1NC
61H 	FG 61HD1D0A  2NO 2NC	FG 61HD1E0A  2NO 2NC	FG 61HD5D0A  2NO 2NC
61M 	FG 61MD1D0A  3NO 1NC	FG 61MD1E0A  3NO 1NC	FG 61MD5D0A  3NO 1NC
61R 	FG 61RD1D0A   1NO+3NC /	FG 61RD1E0A   1NO+3NC /	FG 61RD5D0A   1NO+3NC /
61S 	FG 61SD1D0A   3NO+1NC /	FG 61SD1E0A   3NO+1NC /	FG 61SD5D0A   3NO+1NC /
Actuating force	30 N (60 N  )		
Travel diagrams	Page 464		




Legend:  With positive opening according to EN 60947-5-1,  interlock with lock monitoring acc. to EN ISO 14119

 Contacts activated by the actuator

 Contacts activated by the solenoid



Contact type  
[L] = slow action

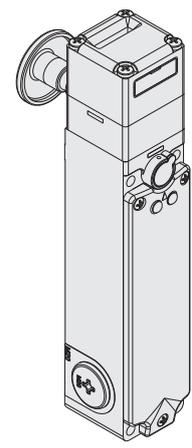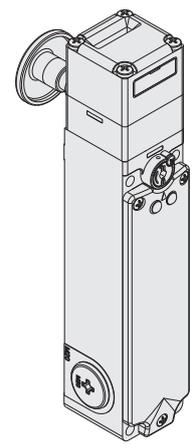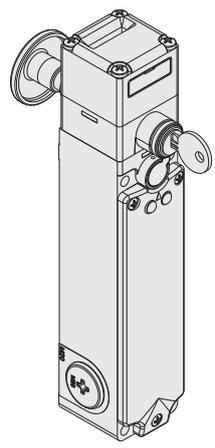

Operating principle	Operating principle D, with key release, escape release button, without actuator	Operating principle D, with escape release button, without actuator	Operating principle E, with escape release button, without actuator
Contact block			
60A [L]	FG 60AD6D0A   1NO+1NC 1NO+1NC	FG 60AD7D0A   1NO+1NC 1NO+1NC	FG 60AD7E0A   1NO+1NC 1NO+1NC
60B [L]	FG 60BD6D0A   2NC 1NO+1NC	FG 60BD7D0A   2NC 1NO+1NC	FG 60BD7E0A   2NC 1NO+1NC
60C [L]	FG 60CD6D0A   3NC 1NC	FG 60CD7D0A   3NC 1NC	FG 60CD7E0A   3NC 1NC
60D [L]	FG 60DD6D0A   1NO+1NC 2NC	FG 60DD7D0A   1NO+1NC 2NC	FG 60DD7E0A   1NO+1NC 2NC
60E [L]	FG 60ED6D0A   1NO+2NC 1NC	FG 60ED7D0A   1NO+2NC 1NC	FG 60ED7E0A   1NO+2NC 1NC
60F [L]	FG 60FD6D0A   1NO+2NC 1NO	FG 60FD7D0A   1NO+2NC 1NO	FG 60FD7E0A   1NO+2NC 1NO
60G [L]	FG 60GD6D0A   2NC 2NC	FG 60GD7D0A   2NC 2NC	FG 60GD7E0A   2NC 2NC
60H [L]	FG 60HD6D0A   4NC /	FG 60HD7D0A   4NC /	FG 60HD7E0A   4NC /
60I [L]	FG 60ID6D0A   3NC 1NO	FG 60ID7D0A   3NC 1NO	FG 60ID7E0A   3NC 1NO
60L [L]	FG 60LD6D0A   2NO+1NC 1NC	FG 60LD7D0A   2NO+1NC 1NC	FG 60LD7E0A   2NO+1NC 1NC
60M [L]	FG 60MD6D0A   2NO+1NC 1NO	FG 60MD7D0A   2NO+1NC 1NO	FG 60MD7E0A   2NO+1NC 1NO
60N [L]	FG 60ND6D0A   1NO+1NC 2NO	FG 60ND7D0A   1NO+1NC 2NO	FG 60ND7E0A   1NO+1NC 2NO
60P [L]	FG 60PD6D0A   1NC 3NC	FG 60PD7D0A   1NC 3NC	FG 60PD7E0A   1NC 3NC
60R [L]	FG 60RD6D0A   2NO+2NC /	FG 60RD7D0A   2NO+2NC /	FG 60RD7E0A   2NO+2NC /
60S [L]	FG 60SD6D0A   1NC 2NO+1NC	FG 60SD7D0A   1NC 2NO+1NC	FG 60SD7E0A   1NC 2NO+1NC
60T [L]	FG 60TD6D0A   1NC 1NO+2NC	FG 60TD7D0A   1NC 1NO+2NC	FG 60TD7E0A   1NC 1NO+2NC
60V [L]	FG 60VD6D0A   2NC 2NO	FG 60VD7D0A   2NC 2NO	FG 60VD7E0A   2NC 2NO
60X [L]	FG 60XD6D0A   1NO 3NC	FG 60XD7D0A   1NO 3NC	FG 60XD7E0A   1NO 3NC
60Y [L]	FG 60YD6D0A   1NO 1NO+2NC	FG 60YD7D0A   1NO 1NO+2NC	FG 60YD7E0A   1NO 1NO+2NC
61D [L]	FG 61DD6D0A   1NC 3NO	FG 61DD7D0A   1NC 3NO	FG 61DD7E0A   1NC 3NO
61E [L]	FG 61ED6D0A   1NO 2NO+1NC	FG 61ED7D0A   1NO 2NO+1NC	FG 61ED7E0A   1NO 2NO+1NC
61G [L]	FG 61GD6D0A   2NO 1NO+1NC	FG 61GD7D0A   2NO 1NO+1NC	FG 61GD7E0A   2NO 1NO+1NC
61H [L]	FG 61HD6D0A   2NO 2NC	FG 61HD7D0A   2NO 2NC	FG 61HD7E0A   2NO 2NC
61M [L]	FG 61MD6D0A   3NO 1NC	FG 61MD7D0A   3NO 1NC	FG 61MD7E0A   3NO 1NC
61R [L]	FG 61RD6D0A   1NO+3NC /	FG 61RD7D0A   1NO+3NC /	FG 61RD7E0A   1NO+3NC /
61S [L]	FG 61SD6D0A   3NO+1NC /	FG 61SD7D0A   3NO+1NC /	FG 61SD7E0A   3NO+1NC /
Actuating force	30 N (60 N )		
Travel diagrams	Page 464		

Legend: With positive opening according to EN 60947-5-1, interlock with lock monitoring acc. to EN ISO 14119

Contacts activated by the actuator  
 Contacts activated by the solenoid

### Stainless steel actuators

**IMPORTANT:** These actuators can be used only with items of the FG and FY series (e.g. FG 60AD1D0A-F20).  
Low level of coding acc. to EN ISO 14119.

	Article	Description
	VF KEYF20	Straight actuator

	Article	Description
	VF KEYF21	Angled actuator




	Article	Description
	VF KEYF22	Actuator with rubber pads

### Universal actuator VF KEYF28

**IMPORTANT:** These actuators can be used only with items of the FG and FY series (e.g. FG 60AD1D0A-F28).  
Low level of coding acc. to EN ISO 14119.

	Article	Description
	VF KEYF28	Universal actuator


Jointed actuator for guards with poor alignment, adjustable in two dimensions for small doors; can be mounted in various positions. The metal fixing body has two pairs of bore holes; it is provided for rotating the working plane of the actuator by 90°.

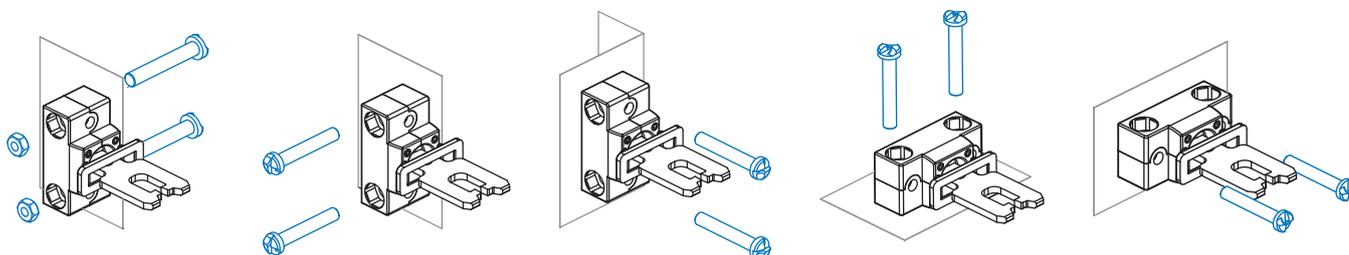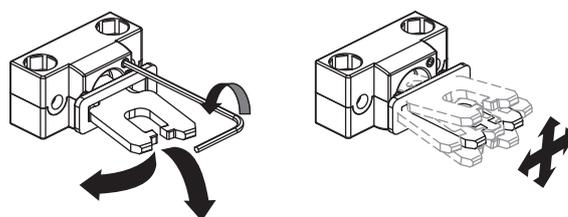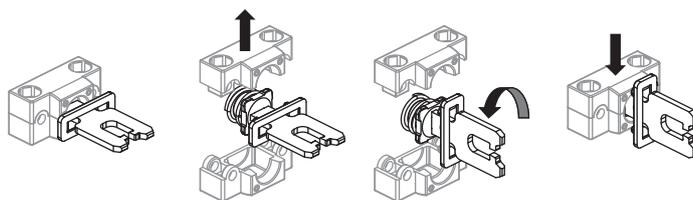

### Auxiliary key release with triangular key




Articles with the V70 and V73 option have an auxiliary key release with a triangular key that meets DIN 22417 standards. This type of lock can be used in situations where the switch must only be unlocked using the corresponding triangular key, a tool which is not usually available. There are two versions of the triangular key release: with a spring return (option V70) and without a spring return (option V73).





## Wiring diagram for M12 connectors

## M12 connector, 12-pole



Contact block 60A 2NO+2NC		Contact block 60B 1NO+3NC		Contact block 60C 4NC		Contact block 60D 1NO+3NC		Contact block 60E 1NO+3NC		Contact block 60F 2NO+2NC		Contact block 60G 4NC		Contact block 60H 4NC		Contact block 60I 1NO+3NC		Contact block 60L 2NO+2NC									
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.								
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2						
NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6		
NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NO	7-8		
NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NC	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10

Contact block 60M 3NO+1NC		Contact block 60N 3NO+1NC		Contact block 60P 4NC		Contact block 60R 2NO+2NC		Contact block 60S 2NO+2NC		Contact block 60T 1NO+3NC		Contact block 60U 4NC		Contact block 60V 2NO+2NC		Contact block 60X 1NO+3NC		Contact block 60Y 2NO+2NC											
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.										
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2								
NO	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NO	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6		
NO	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NO	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8	NO	7-8	NO	7-8	NO	7-8		
NO	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NC	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10


Contact block 61A 1NO+3NC		Contact block 61B 2NO+2NC		Contact block 61C 3NO+1NC		Contact block 61D 3NO+1NC		Contact block 61E 3NO+1NC		Contact block 61G 3NO+1NC		Contact block 61H 2NO+2NC		Contact block 61M 3NO+1NC		Contact block 61R 1NO+3NC		Contact block 61S 3NO+1NC											
Contacts	Pin no.																												
A1-A2	1-2	A1-A2	1-2																										
NC	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4	NO	3-4	NC	3-4	NO	3-4	NO	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6																				
NC	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NO	7-8	NO	7-8																
NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10																		

**Note:** the wires connected to pins 11 and 12 of the M12 connector can be used to activate the LEDs in FG series configurations with freely connectable LEDs.



# Wiring diagram for M23 connectors

## M23 connector, 12-pole




Contact block 60A 2NO+2NC		Contact block 60B 1NO+3NC		Contact block 60C 4NC		Contact block 60D 1NO+3NC		Contact block 60E 1NO+3NC		Contact block 60F 2NO+2NC		Contact block 60G 4NC		Contact block 60H 4NC		Contact block 60I 1NO+3NC		Contact block 60L 2NO+2NC							
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.						
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2				
NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4		
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6
NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NO	7-8
NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10
ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11

Contact block 60M 3NO+1NC		Contact block 60N 3NO+1NC		Contact block 60P 4NC		Contact block 60R 2NO+2NC		Contact block 60S 2NO+2NC		Contact block 60T 1NO+3NC		Contact block 60U 4NC		Contact block 60V 2NO+2NC		Contact block 60X 1NO+3NC		Contact block 60Y 2NO+2NC									
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.								
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2						
NO	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6		
NO	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NO	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8	NO	7-8	NO	7-8		
NO	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NC	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10
ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11	ground	11		

Contact block 61A 1NO+3NC		Contact block 61B 2NO+2NC		Contact block 61C 3NO+1NC		Contact block 61D 3NO+1NC		Contact block 61E 3NO+1NC		Contact block 61G 3NO+1NC		Contact block 61H 2NO+2NC		Contact block 61M 3NO+1NC		Contact block 61R 1NO+3NC		Contact block 61S 3NO+1NC									
Contacts	Pin no.																										
A1-A2	1-2	A1-A2	1-2																								
NC	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4	NO	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NO	3-4	NO	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6																				
NC	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NO	7-8																
NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10																		
ground	11	ground	11	ground	11	ground	11																				

## Release button

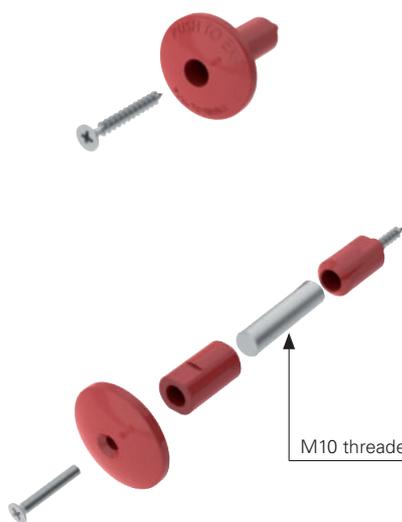


Article	Description
VF FG-LP15	Technopolymer release button for max. 15 mm wall thickness, supplied with screw
VF FG-LP30	Technopolymer release button for max. 30 mm wall thickness, supplied with screw
VF FG-LP40	Technopolymer release button for max. 40 mm wall thickness, supplied with screw
VF FG-LP60	Metal release button for max. 60 mm wall thickness, supplied with screw

Article	Description
VF FG-LPRG	Metal release button for wall thickness from 60 to 500 mm, supplied with 2 supports and 2 screws, without M10 threaded bar


The M10 bar can be supplied in zinc-plated steel with 1 m length. Article: AC 8512.

## Other release button lengths

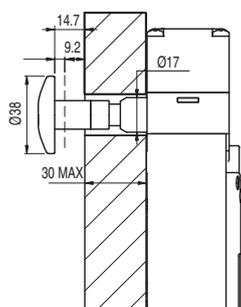


-LP30

For wall thickness  
15 ... 30 mm

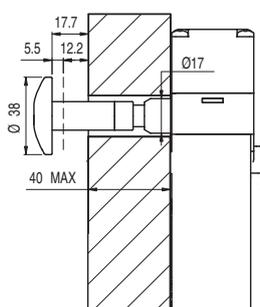


-LP40

For wall thickness  
30 ... 40 mm

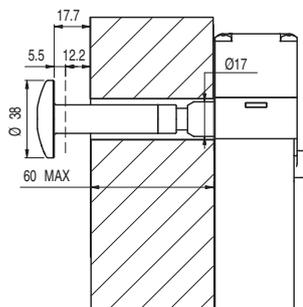

-LP60

For wall thickness  
40 ... 60 mm

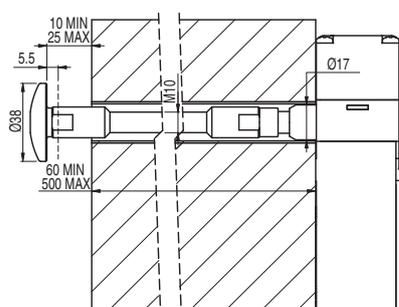

-LPRG

For wall thickness  
60 ... 500 mm

**-LP30, -LP40, -LP60:**

- Avoid bending and twisting the release button.
- To guarantee correct device operation, keep a distance of 10 ... 25 mm between the wall and the release button.
- The actuation path of the release button must always be kept clean. Dirt or chemical products could compromise the device operation.
- Periodically check the device for proper function.

**-LPRG:**

- Avoid bending and twisting the release button.
- On the inside of the wall, use a bushing or a tube with an inner diameter of  $18 \pm 0.5$  mm as a guide.
- Guide in the M10 threaded rod in such a way so as to prevent bending. The M10 threaded rod is not supplied with the device.
- Use medium-strength thread locker to secure the threaded rod.
- Do not exceed an overall length of 500 mm between the release button and the switch.
- To guarantee correct device operation, keep a distance of 10 ... 25 mm between the wall and the release button.
- The actuation path of the release button must always be kept clean. Dirt or chemical products could compromise the device operation.
- Periodically check the device for proper function.

## Accessories

Article	Description
VF KB2	Lock out device

Padlockable lock out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area.  
To be used only with FG and FY series switches (e.g. FG 60AD1DOA). Hole diameter for padlocks: 9 mm.

Article	Description
VF KLA371	Set of two locking keys

Extra copy of the locking keys to be purchased if further keys are needed (standard supply: 2 units). The keys of all switches have the same code. Other codes on request.

All values in the drawings are in mm


Accessories See page 419

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)


## Safety modules

Pizzato Elettrica offers its customers a wide range of safety modules. These were developed taking into consideration typical problems encountered during the monitoring of safety switches under actual operating conditions. Safety modules with instantaneous or delayed contacts for emergency circuits of type 0 (immediate stop) or type 1 (controlled stop).


Safety switches with solenoid of the FG series can be connected to safety modules for the realization of safety circuits up to PL e acc. to EN ISO 13849. For technical information or wiring diagrams, please contact our technical office.

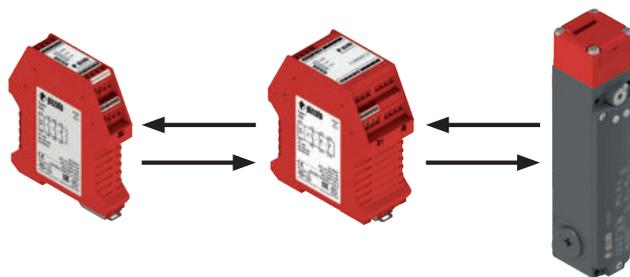

## Application example with safety timer

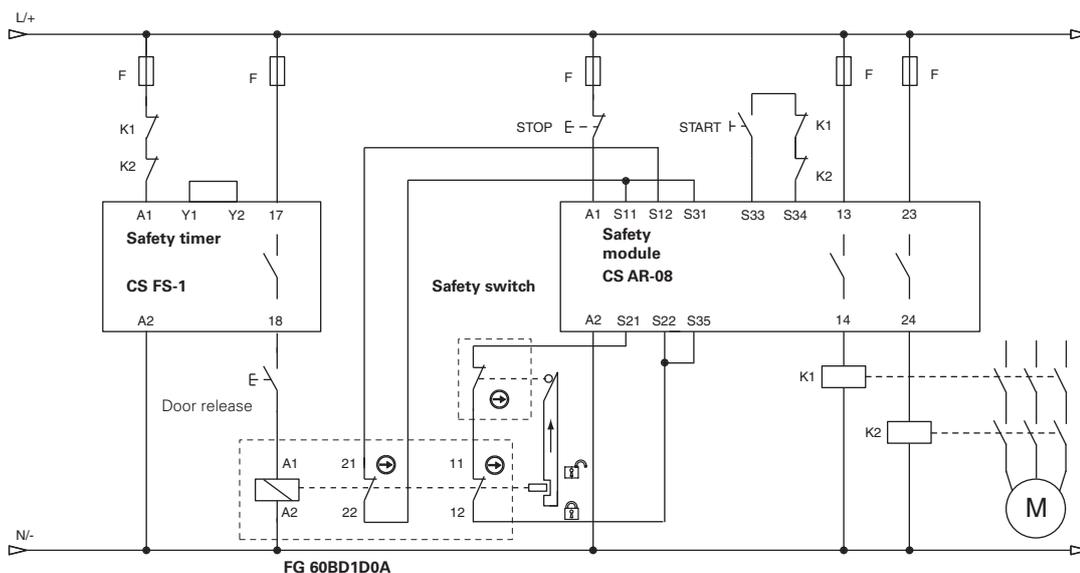

## Application example with safety module for standstill monitoring

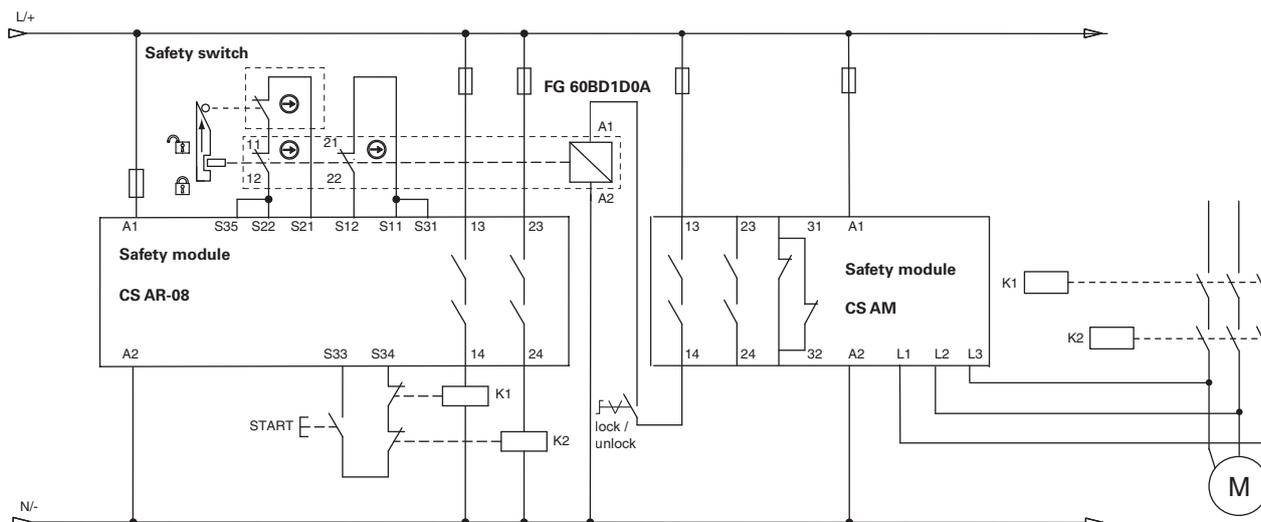


**Note:** The NC contacts of K1 and K2 are mechanically guided (EN 60947-4-1, Annex F)

## Description



These switches are used on machines where the hazardous conditions remain for a while, even after the machines have been switched off, for example because of mechanical inertia of pulleys, saw disks, parts under pressure or with high temperatures. Thus, the switches can also be used if individual guards are only to be opened under certain conditions.

The versions with solenoid actuated NC contacts are considered interlocks with locking in accordance with ISO 14119, and the product's label is marked with the symbol shown.




## Technopolymer housing



The FY series safety switches have glass fibre reinforced housing made of reinforced technopolymer that is shock-proof, self-extinguishing and very resistant to the extraction force that can be exerted by the actuator.

The new design combines robustness and functionality with a modern aesthetic.

## Integrated control devices

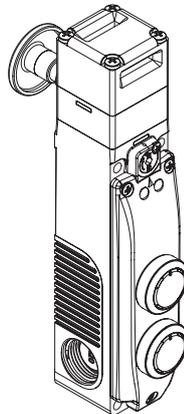


The switch is also available with integrated control devices, allowing up to two devices and related contact blocks, such as buttons, emergency stop buttons, indicator lights or selectors to be mounted.

The result is a compact solution with direct access to control devices without needing to install them separately on the switch panel or in their own housing.


The devices can be illuminated and, thanks to the PUSH-IN spring-operated connections, wiring is quick and intuitive.

## Holding force of the locked actuator



The strong interlocking system guarantees a maximum actuator holding force of  $F_{1max} = 2800 \text{ N}$ .

## Heads and devices with variable orientation

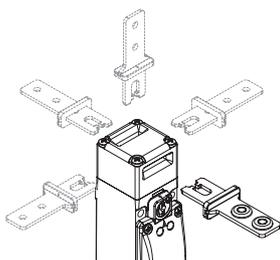

The system can be variably configured by loosening the 4 screws on the head.

The key release device and the release button can also be rotated and secured independently of one another in steps of  $90^\circ$ . The device can thus assume 32 different configurations.


## Key release with triangular key



The auxiliary key release is also available with option V73, a variant with triangular key acc. to DIN 22417. This option can be used with installations in which the auxiliary release is to be actuated with a triangular key that is not normally available.


On request, option V70 is also available, with which the auxiliary release returns to the initial position with the aid of a spring.

## Non-detachable heads and release devices




The head and the release device can be rotated but cannot be detached from each other. This makes the switch more secure since the problem of incorrect assembly by the installer cannot occur; in addition, the risk of damage is lower (loss of small parts, penetration of dirt, etc.).

## Wide-ranging actuator travel

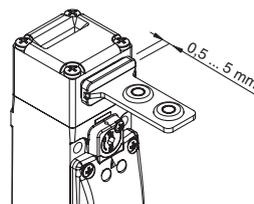

The actuation head of this switch features a wide range of travel. In this way the guard can oscillate along the direction of insertion (4.5 mm) without causing unwanted machine shutdowns. This wide range of travel is available in all actuators in order to ensure maximum device reliability.

## Key release device and escape release button

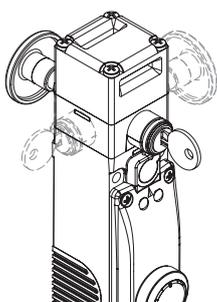

The key release device (auxiliary release) is used to permit unlocking of the actuator only by personnel in possession of the key. The device also functions with no power supply and, once actuated, prevents the guard from being locked.

The escape release button allows actuator release and immediate opening of the guard. Generally used in machines within which an operator could inadvertently become trapped, it faces towards the machine interior, to allow the operator to exit even in the event of

a power failure. The button has two stable states and can be freely extended in length with suitable extensions (see accessories).

Both devices can be positioned on the four sides of the switch. As a result, it can be installed both towards the interior and towards the exterior of the machine.


## Contact blocks with 4 contacts



Innovative contact block with 4 contacts, available in various contact configurations for monitoring the actuator or the solenoid (patented). The unit is supplied with captive screws and self-lifting clamping plates. Removable finger protection for eyelet terminal.

High-reliability electrical contacts with 4 contact points and double interruption.

## Safety screws for actuators



As required by EN ISO 14119, the actuator must be fixed immovably to the guard frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 419.



### LED display unit, type A




In the version with LED display unit of type A, two green LEDs are switched-on directly by the power supply of the solenoid. Wiring is not necessary.

### LED display unit, types B and C



In the version with LED display unit of type B, connection wires from two LEDs are available, one green and one red. By means of suitable connections on the contact block, various operating states of the switch can be displayed externally.

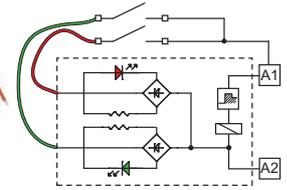


### Protection degree IP67

# IP67

These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing.

### Three conduit entries



The switch is provided with three conduit entries in different directions. This allows its application in series connections or in narrow places.

### Extended temperature range

# -40°C

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +60°C.

They can therefore be used for applications in cold stores, sterilisers, and other equipment operated in very low-temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

### Sealable auxiliary release device



Switches with locked actuator with deactivated solenoid (function principle D) are equipped with an auxiliary release device for the solenoid to simplify installation of the switch and to facilitate entry into the danger zone in the event of a power failure. The auxiliary release device acts on the switch exactly as if the solenoid was energised. As a result, it also actuates the electrical contacts. Can only be actuated with the use of two tools; this ensures adequate protection against tampering. If necessary, it can be sealed using the appropriate hole.

device acts on the switch exactly as if the solenoid was energised. As a result, it also actuates the electrical contacts. Can only be actuated with the use of two tools; this ensures adequate protection against tampering. If necessary, it can be sealed using the appropriate hole.

### Laser engraving




All FY series switches are permanently marked with a special laser system. As a result, the marking remains legible even under extreme operating conditions. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time. In the versions with buttons on the cover, the button lenses can be laser-engraved on request so that the desired texts are directly and permanently applied to the lenses.

### Access monitoring



These safety switches alone do not provide sufficient personal protection to the operators or maintenance personnel in situations where they completely enter the danger zone, since unintentional closing of a door after entry could cause the machine to re-start. If the re-start release is completely dependent on these switches, a system for preventing this danger must be provided, e.g. a padlockable device for actuator entry locking VF KB2 (page 154) or a safety handle, such as P-KUBE Fast (page 221).

### Holding force of the unlocked actuator

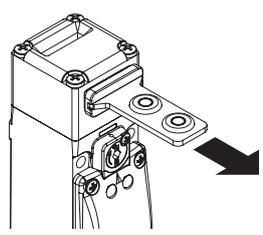


The inside of each switch features a device which holds the actuator in its closed position. Ideal for all those applications where several guards are unlocked simultaneously, but only one is actually opened. The device keeps all the unlocked guards in their position with a retaining force of approx. 30 N, stopping any vibrations or gusts of wind from opening them.

### LED signalling lights



Thanks to the three threaded cable entries, the high luminosity LED signalling lights of the VF SL series can be installed on the switch. The LED signalling lights can be easily installed by screwing them on one of the conduit entries not used for electric cables. They can be used for many different purposes: for example, to signal, from a distance, whether the switch has been actuated; whether the guard has closed correctly; or whether the guard is locked or unlocked. For more information see chapter Accessories, page 419.

Selection diagram

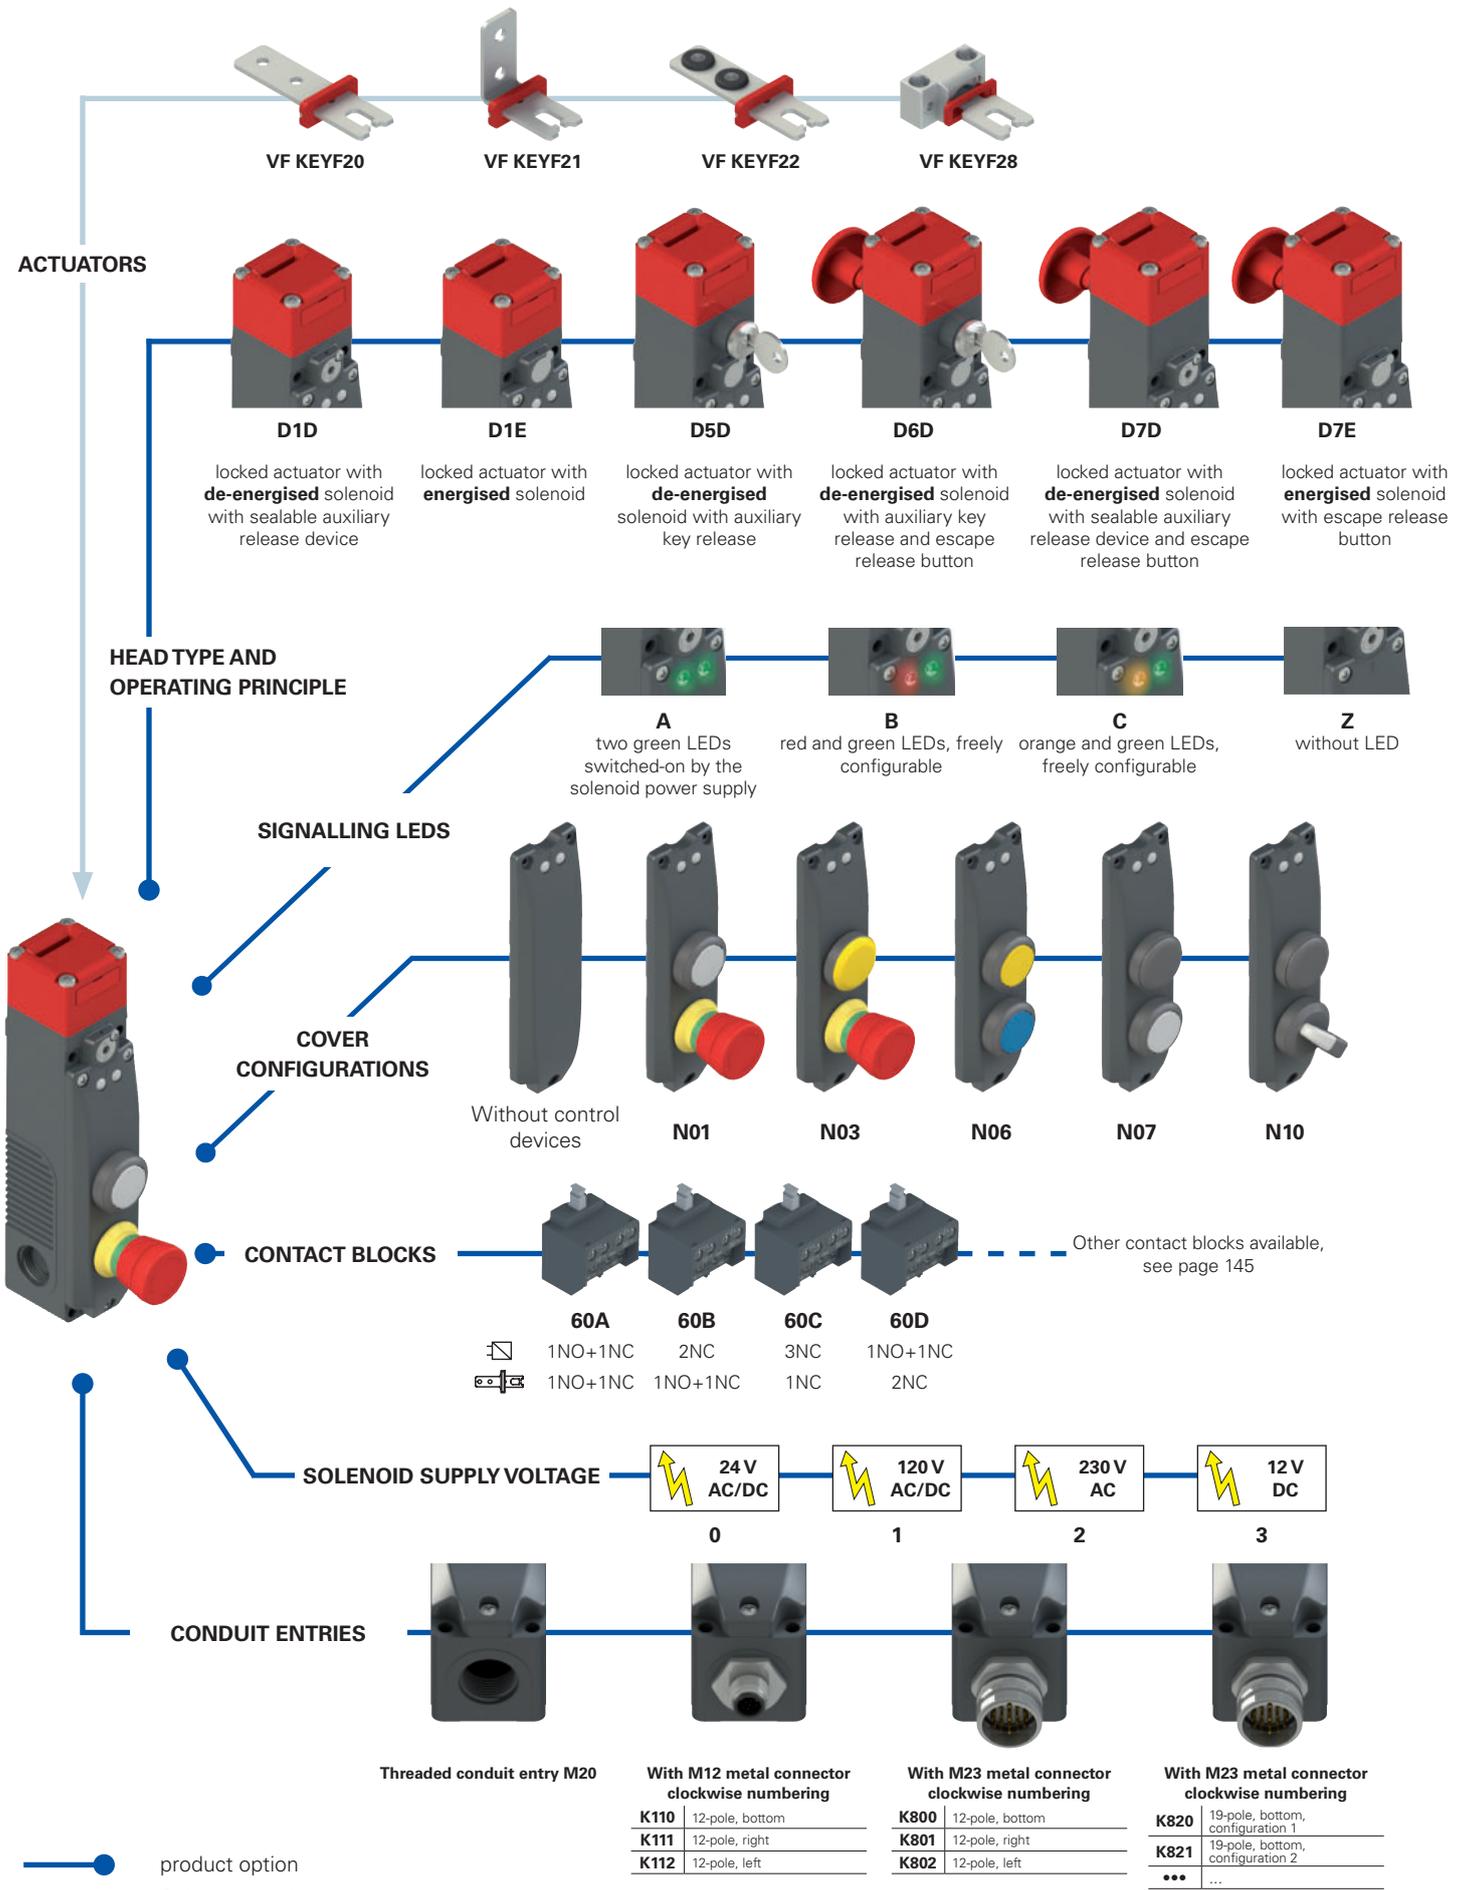



## Code structure

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options

**FY 60AD1D0A-LP30N01F20GK110T6V34**

Contact blocks		
	Contacts activated by the solenoid	Contacts activated by the actuator
<b>60A</b>	1NO+1NC	1NO+1NC
<b>60B</b>	2NC	1NO+1NC
<b>60C</b>	3NC	1NC
<b>60D</b>	1NO+1NC	2NC
<b>60E</b>	1NO+2NC	1NC
<b>60F</b>	1NO+2NC	1NO
<b>60G</b>	2NC	2NC
<b>60H</b>	4NC	/
<b>60I</b>	3NC	1NO
<b>60L</b>	2NO+1NC	1NC
<b>60M</b>	2NO+1NC	1NO
<b>60N</b>	1NO+1NC	2NO
<b>60P</b>	1NC	3NC
<b>60R</b>	2NO+2NC	/
<b>60S</b>	1NC	2NO+1NC
<b>60T</b>	1NC	1NO+2NC
<b>60U</b>	/	4NC
<b>60V</b>	2NC	2NO
<b>60X</b>	1NO	3NC
<b>60Y</b>	1NO	1NO+2NC
<b>61A</b>	/	1NO+3NC
<b>61B</b>	/	2NO+2NC
<b>61C</b>	/	3NO+1NC
<b>61D</b>	1NC	3NO
<b>61E</b>	1NO	2NO+1NC
<b>61G</b>	2NO	1NO+1NC
<b>61H</b>	2NO	2NC
<b>61M</b>	3NO	1NC
<b>61R</b>	1NO+3NC	/
<b>61S</b>	3NO+1NC	/

**Note:** contact blocks 60U, 61A, 61B, 61C cannot be combined with operating principles D6D, D7D, D7E.

Operating principle	
<b>D1D</b>	locked actuator with de-energised solenoid. With sealable auxiliary release device.
<b>D1E</b>	locked actuator with energised solenoid
<b>D5D</b>	locked actuator with de-energised solenoid. With auxiliary key release.
<b>D6D</b>	locked actuator with de-energised solenoid. With auxiliary key release and escape release button.
<b>D7D</b>	locked actuator with de-energised solenoid. With sealable auxiliary release device and escape release button.
<b>D7E</b>	locked actuator with energised solenoid. With escape release button.

Auxiliary release options (only for articles FY ***D5D**, FY ***D6D**)	
	The key can be removed in locked and unlocked actuator position (standard)
<b>V34</b>	The key can be removed only in the locked position of the actuator
<b>V70</b>	Key release with triangular key with spring return (description on page 151)
<b>V73</b>	Key release with triangular key, no spring return (description on page 151)

Ambient temperature	
	-25°C ... +60°C (standard)
<b>T6</b>	-40°C ... +60°C

Pre-installed connectors	
	without connector (standard)
<b>K110</b>	M12 metal connector, 12-pole, bottom
<b>K800</b>	M23 metal connector, 12-pole, bottom
<b>K820</b>	M23 metal connector, 19-pole, bottom, configuration 1
...	...

For the complete list of possible combinations please contact our technical department.  
**Note:** The 19-pole M23 connector is only available for versions with integrated control devices and 24 Vdc supply voltage.

Contact type	
	silver contacts (standard)
<b>G</b>	silver contacts with 1 µm gold coating

Actuators	
	without actuator (standard)
<b>F20</b>	straight actuator VF KEYF20
<b>F21</b>	angled actuator VF KEYF21
<b>F22</b>	actuator with rubber pads VF KEYF22
<b>F28</b>	universal actuator VF KEYF28

Button configurations	
<b>N01</b>	configuration 01
<b>N02</b>	configuration 02
<b>N03</b>	configuration 03
...	other configurations on request

Release button length	
	for max. 15 mm wall thickness (standard)
<b>LP30</b>	for max. 30 mm wall thickness
<b>LP40</b>	for max. 40 mm wall thickness
<b>LP60</b>	for max. 60 mm wall thickness
<b>LPRG</b>	adjustable, for wall thickness from 60 mm to 500 mm

Signalling LEDs	
<b>A</b>	two green LEDs switched-on by the solenoid power supply
<b>B</b>	red and green LEDs, freely configurable
<b>C</b>	orange and green LEDs, freely configurable
<b>Z</b>	without LED

Solenoid supply voltage	
<b>0</b>	24 Vac/dc (-10% ... +10%)
<b>1</b>	120 Vac/dc (-15% ... +10%)
<b>2</b>	230 Vac (-15% ... +10%)
<b>3</b>	12 Vdc (-10% ... +10%)



### Main features

- Actuator holding force  $F_{1max}$ : 2800 N
- 30 contact blocks with 4 contacts
- Technopolymer housing, three M20 conduit entries
- Protection degrees IP67 and IP69K
- Versions with key release and escape release button
- Versions with integrated control devices
- 4 stainless steel actuators
- Head and release devices, individually turnable and non-detachable
- Signalling LEDs
- Operation with energised or de-energised solenoid

### Quality marks:



IMQ approval: Pending  
 UL approval: E131787  
 CCC approval: 2021000305000103

### Technical data

#### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing and shock-proof  
 Head and release device both made of metal, powder-coated and fired in a kiln

Three knock-out threaded conduit entries: M20x1.5 (standard)  
 Protection degree: IP67 acc. to EN 60529 (with cable gland of equal or higher protection degree)  
 IP69K acc. to ISO 20653 (Protect the cables from direct high-pressure and high-temperature jets)

Protection degree with control devices: IP65 acc. to EN 60529

#### General data

SIL (SIL CL) up to: SIL 3 acc. to EN 62061  
 Performance Level (PL) up to: PL e acc. to EN ISO 13849-1  
 Interlock with mechanical lock, coded: type 2 acc. to EN ISO 14119  
 Coding level: low acc. to EN ISO 14119

Safety parameters:  
 $B_{10D}$ : 5,000,000 for NC contacts  
 Mission time: 20 years  
 Ambient temperature: -25°C ... +60°C (standard)  
 -40°C ... +60°C (T6 option)

Max. actuation frequency: 600 operating cycles/hour  
 Mechanical endurance: 1 million operating cycles  
 Max. actuation speed: 0.5 m/s  
 Min. actuation speed: 1 mm/s  
 Maximum force before breakage  $F_{1max}$ : 2800 N acc. to EN ISO 14119  
 Max. holding force  $F_{Zh}$ : 2150 N acc. to EN ISO 14119  
 Maximum clearance of locked actuator: 4.5 mm  
 Released actuator extraction force: 30 N  
 Tightening torques for installation: see page 441  
 Wire cross-sections and wire stripping lengths: see page 461

#### Solenoid

Duty cycle: 100% ED (continuous operation)  
 Solenoid consumption: 9 VA

#### In compliance with standards:

EN 60947-5-1, EN 60947-1, EN 60204-1, EN ISO 14119, EN ISO 12100, EN 60529, EN 61000-6-2, EN 61000-6-3, EN IEC 63000, BG-GS-ET-15, BG-GS-ET-19, UL 508, CSA C22.2 No. 14.

#### Approvals:

EN 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5

#### Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

#### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

**⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 443 to 454.**

	Electrical data of the contact block of the switch	Utilization category
without connector	Thermal current ( $I_{th}$ ): 6 A Rated insulation voltage (U): 400 Vac 300 Vdc Rated impulse withstand voltage ( $U_{imp}$ ): 6 kV Conditional short circuit current: 1000 A acc. to EN 60947-5-1 Protection against short circuits: type gG fuse 10 A 500 V Pollution degree: 3	Alternating current: AC15 (50÷60 Hz) $U_e$ (V) 120 250 400 $I_e$ (A) 6 5 3 Direct current: DC13 $U_e$ (V) 24 125 250 $I_e$ (A) 3 0.7 0.4
with M23 connector, 12-pole	Thermal current ( $I_{th}$ ): 6 A Rated insulation voltage (U): 250 Vac 300 Vdc Protection against short circuits: type gG fuse 8 A 500 V Pollution degree: 3	Alternating current: AC15 (50÷60 Hz) $U_e$ (V) 120 250 $I_e$ (A) 6 5 Direct current: DC13 $U_e$ (V) 24 125 250 $I_e$ (A) 3 0.7 0.4
with M23 connector, 19-pole	Thermal current ( $I_{th}$ ): 3 A Rated insulation voltage (U): 30 Vac 36 Vdc Protection against short circuits: type gG fuse 1 A Pollution degree: 3	Alternating current: AC15 (50÷60 Hz) $U_e$ (V) 24 $I_e$ (A) 3 Direct current: DC13 $U_e$ (V) 24 $I_e$ (A) 3
with M12 connector, 12-pole	Thermal current ( $I_{th}$ ): 1.5 A Rated insulation voltage (U): 30 Vac 36 Vdc Protection against short circuits: type gG fuse 1.5 A Pollution degree: 3	Alternating current: AC15 (50÷60 Hz) $U_e$ (V) 24 $I_e$ (A) 1.5 Direct current: DC13 $U_e$ (V) 24 $I_e$ (A) 1.5

### Features approved by UL

Electrical Ratings:

Main ratings:

Input with coil 12 Vdc, 24 Vac/dc, 120 Vac/dc, 230Vac

Output Pilot Duty B300, Q300

Overvoltage category II

Secondary ratings:

Output 24 Vac/dc "Class 2" 0.25 A Pilot Duty (Maximum two Actuators, with maximum five contacts, NO or NC or both)

Environmental Ratings:

Enclosure type 1, 4X, 12, 13 for model FY 6xxxxxxx-xxx

Enclosure type 1 for model FY 6xxxxxxx-Nxx

The hub is to be connected to the conduit before the hub is connected to the enclosure.

Value of tightening torque of cover's screws 1.0-1.2 Nm.

### Operating principle

The operating principle of these safety switches allows three different operating states:

**state A:** with inserted and locked actuator

**state B:** with inserted but not locked actuator

**state C:** with extracted actuator


All or some of these states can be monitored by means of electrical NO contacts or NC contacts with positive opening by selecting the appropriate contact blocks. In detail, contact blocks that have electric contacts marked with the symbol of the solenoid (  ) are switched in the transition between the state A and state B, while the electric contacts marked with the symbol of the actuator (  ) are switched between state B and state C.

#### Operating principle

Select from two operating principles for actuator locking:




- **Operating principle D:** locked actuator with de-energised solenoid. The actuator is released by applying the power supply to the solenoid (see example of the operating phases).
- **Operating principle E:** locked actuator with energised solenoid. The actuator is released by switching off the power supply to the solenoid. This version should only be used under certain conditions, since a power failure at the system will result in the immediate opening of the guard.

### Example: operating phases with FY 60AD1D0A-F21 (switch with operating principle D)

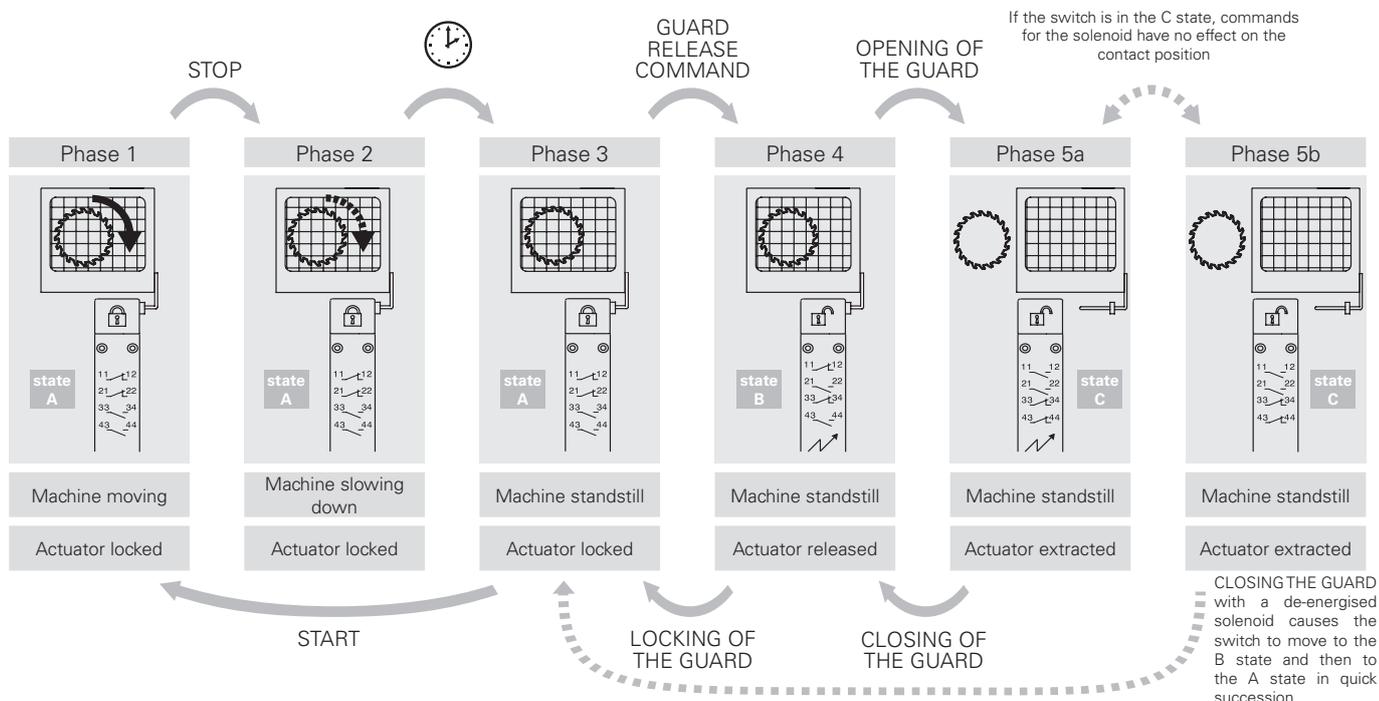

Selection table for switches

Contact type  
 = slow action

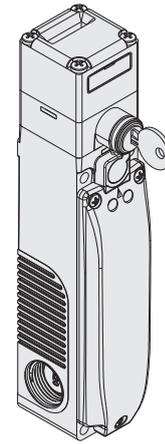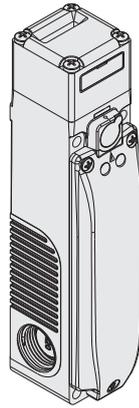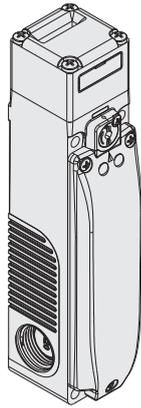

Operating principle	Operating principle D, with sealable auxiliary release device, without actuator	Operating principle E, without actuator	Operating principle D, with key release, without actuator
Contact block	 	 	 
60A	 FY 60AD1D0A   1NO+1NC 1NO+1NC	FY 60AD1E0A   1NO+1NC 1NO+1NC	FY 60AD5D0A   1NO+1NC 1NO+1NC
60B	 FY 60BD1D0A   2NC 1NO+1NC	FY 60BD1E0A   2NC 1NO+1NC	FY 60BD5D0A   2NC 1NO+1NC
60C	 FY 60CD1D0A   3NC 1NC	FY 60CD1E0A   3NC 1NC	FY 60CD5D0A   3NC 1NC
60D	 FY 60DD1D0A   1NO+1NC 2NC	FY 60DD1E0A   1NO+1NC 2NC	FY 60DD5D0A   1NO+1NC 2NC
60E	 FY 60ED1D0A   1NO+2NC 1NC	FY 60ED1E0A   1NO+2NC 1NC	FY 60ED5D0A   1NO+2NC 1NC
60F	 FY 60FD1D0A   1NO+2NC 1NO	FY 60FD1E0A   1NO+2NC 1NO	FY 60FD5D0A   1NO+2NC 1NO
60G	 FY 60GD1D0A   2NC 2NC	FY 60GD1E0A   2NC 2NC	FY 60GD5D0A   2NC 2NC
60H	 FY 60HD1D0A   4NC /	FY 60HD1E0A   4NC /	FY 60HD5D0A   4NC /
60I	 FY 60ID1D0A   3NC 1NO	FY 60ID1E0A   3NC 1NO	FY 60ID5D0A   3NC 1NO
60L	 FY 60LD1D0A   2NO+1NC 1NC	FY 60LD1E0A   2NO+1NC 1NC	FY 60LD5D0A   2NO+1NC 1NC
60M	 FY 60MD1D0A   2NO+1NC 1NO	FY 60MD1E0A   2NO+1NC 1NO	FY 60MD5D0A   2NO+1NC 1NO
60N	 FY 60ND1D0A   1NO+1NC 2NO	FY 60ND1E0A   1NO+1NC 2NO	FY 60ND5D0A   1NO+1NC 2NO
60P	 FY 60PD1D0A   1NC 3NC	FY 60PD1E0A   1NC 3NC	FY 60PD5D0A   1NC 3NC
60R	 FY 60RD1D0A   2NO+2NC /	FY 60RD1E0A   2NO+2NC /	FY 60RD5D0A   2NO+2NC /
60S	 FY 60SD1D0A   1NC 2NO+1NC	FY 60SD1E0A   1NC 2NO+1NC	FY 60SD5D0A   1NC 2NO+1NC
60T	 FY 60TD1D0A   1NC 1NO+2NC	FY 60TD1E0A   1NC 1NO+2NC	FY 60TD5D0A   1NC 1NO+2NC
60U	 FY 60UD1D0A  / 4NC	FY 60UD1E0A  / 4NC	FY 60UD5D0A  / 4NC
60V	 FY 60VD1D0A   2NC 2NO	FY 60VD1E0A   2NC 2NO	FY 60VD5D0A   2NC 2NO
60X	 FY 60XD1D0A  1NO 3NC	FY 60XD1E0A  1NO 3NC	FY 60XD5D0A  1NO 3NC
60Y	 FY 60YD1D0A  1NO 1NO+2NC	FY 60YD1E0A  1NO 1NO+2NC	FY 60YD5D0A  1NO 1NO+2NC
61A	 FY 61AD1D0A  / 1NO+3NC	FY 61AD1E0A  / 1NO+3NC	FY 61AD5D0A  / 1NO+3NC
61B	 FY 61BD1D0A  / 2NO+2NC	FY 61BD1E0A  / 2NO+2NC	FY 61BD5D0A  / 2NO+2NC
61C	 FY 61CD1D0A  / 3NO+1NC	FY 61CD1E0A  / 3NO+1NC	FY 61CD5D0A  / 3NO+1NC
61D	 FY 61DD1D0A   1NC 3NO	FY 61DD1E0A   1NC 3NO	FY 61DD5D0A   1NC 3NO
61E	 FY 61ED1D0A  1NO 2NO+1NC	FY 61ED1E0A  1NO 2NO+1NC	FY 61ED5D0A  1NO 2NO+1NC
61G	 FY 61GD1D0A  2NO 1NO+1NC	FY 61GD1E0A  2NO 1NO+1NC	FY 61GD5D0A  2NO 1NO+1NC
61H	 FY 61HD1D0A  2NO 2NC	FY 61HD1E0A  2NO 2NC	FY 61HD5D0A  2NO 2NC
61M	 FY 61MD1D0A  3NO 1NC	FY 61MD1E0A  3NO 1NC	FY 61MD5D0A  3NO 1NC
61R	 FY 61RD1D0A   1NO+3NC /	FY 61RD1E0A   1NO+3NC /	FY 61RD5D0A   1NO+3NC /
61S	 FY 61SD1D0A   3NO+1NC /	FY 61SD1E0A   3NO+1NC /	FY 61SD5D0A   3NO+1NC /
Actuating force	30 N (60 N  )		
Travel diagrams	Page 465		


Legend:  With positive opening according to EN 60947-5-1,  interlock with lock monitoring acc. to EN ISO 14119

Note: The position of the contacts depending on the switch state can be found on pages 129-130 by replacing codes FG with FY.

Note: See pages 155-156 for the connection diagrams for M12 and M23 connector contact blocks.



### Selection table for switches

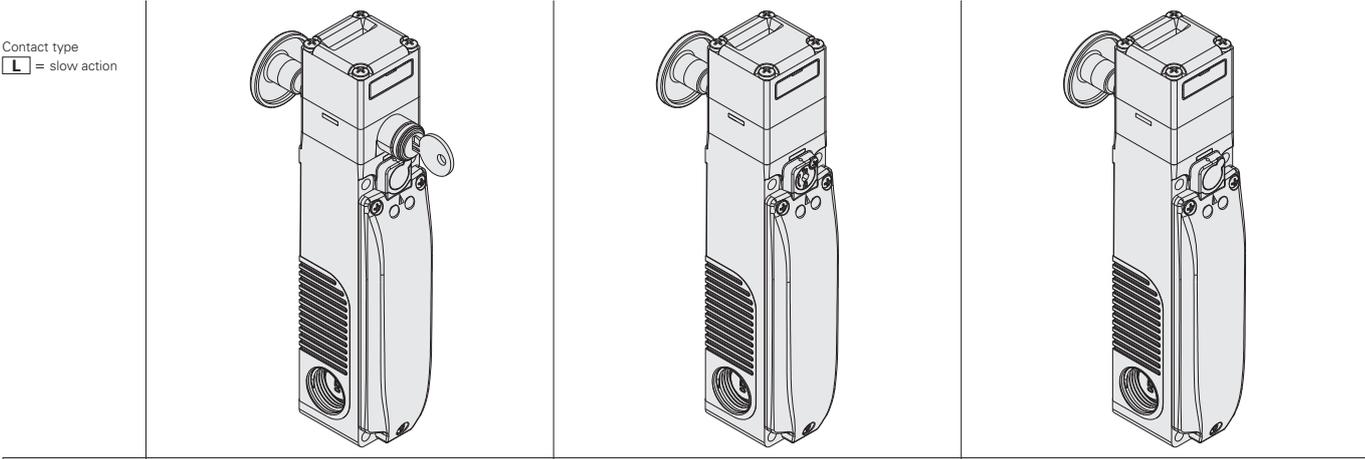


Operating principle	Operating principle D, with key release, escape release button, without actuator	Operating principle D, with escape release button, without actuator	Operating principle E, with escape release button, without actuator
Contact type	[L] = slow action		
Contact block			
60A	[L] FY 60AD6D0A   1NO+1NC 1NO+1NC	FY 60AD7D0A   1NO+1NC 1NO+1NC	FY 60AD7E0A   1NO+1NC 1NO+1NC
60B	[L] FY 60BD6D0A   2NC 1NO+1NC	FY 60BD7D0A   2NC 1NO+1NC	FY 60BD7E0A   2NC 1NO+1NC
60C	[L] FY 60CD6D0A   3NC 1NC	FY 60CD7D0A   3NC 1NC	FY 60CD7E0A   3NC 1NC
60D	[L] FY 60DD6D0A   1NO+1NC 2NC	FY 60DD7D0A   1NO+1NC 2NC	FY 60DD7E0A   1NO+1NC 2NC
60E	[L] FY 60ED6D0A   1NO+2NC 1NC	FY 60ED7D0A   1NO+2NC 1NC	FY 60ED7E0A   1NO+2NC 1NC
60F	[L] FY 60FD6D0A   1NO+2NC 1NO	FY 60FD7D0A   1NO+2NC 1NO	FY 60FD7E0A   1NO+2NC 1NO
60G	[L] FY 60GD6D0A   2NC 2NC	FY 60GD7D0A   2NC 2NC	FY 60GD7E0A   2NC 2NC
60H	[L] FY 60HD6D0A   4NC /	FY 60HD7D0A   4NC /	FY 60HD7E0A   4NC /
60I	[L] FY 60ID6D0A   3NC 1NO	FY 60ID7D0A   3NC 1NO	FY 60ID7E0A   3NC 1NO
60L	[L] FY 60LD6D0A   2NO+1NC 1NC	FY 60LD7D0A   2NO+1NC 1NC	FY 60LD7E0A   2NO+1NC 1NC
60M	[L] FY 60MD6D0A   2NO+1NC 1NO	FY 60MD7D0A   2NO+1NC 1NO	FY 60MD7E0A   2NO+1NC 1NO
60N	[L] FY 60ND6D0A   1NO+1NC 2NO	FY 60ND7D0A   1NO+1NC 2NO	FY 60ND7E0A   1NO+1NC 2NO
60P	[L] FY 60PD6D0A   1NC 3NC	FY 60PD7D0A   1NC 3NC	FY 60PD7E0A   1NC 3NC
60R	[L] FY 60RD6D0A   2NO+2NC /	FY 60RD7D0A   2NO+2NC /	FY 60RD7E0A   2NO+2NC /
60S	[L] FY 60SD6D0A   1NC 2NO+1NC	FY 60SD7D0A   1NC 2NO+1NC	FY 60SD7E0A   1NC 2NO+1NC
60T	[L] FY 60TD6D0A   1NC 1NO+2NC	FY 60TD7D0A   1NC 1NO+2NC	FY 60TD7E0A   1NC 1NO+2NC
60V	[L] FY 60VD6D0A   2NC 2NO	FY 60VD7D0A   2NC 2NO	FY 60VD7E0A   2NC 2NO
60X	[L] FY 60XD6D0A   1NO 3NC	FY 60XD7D0A   1NO 3NC	FY 60XD7E0A   1NO 3NC
60Y	[L] FY 60YD6D0A   1NO 1NO+2NC	FY 60YD7D0A   1NO 1NO+2NC	FY 60YD7E0A   1NO 1NO+2NC
61D	[L] FY 61DD6D0A   1NC 3NO	FY 61DD7D0A   1NC 3NO	FY 61DD7E0A   1NC 3NO
61E	[L] FY 61ED6D0A   1NO 2NO+1NC	FY 61ED7D0A   1NO 2NO+1NC	FY 61ED7E0A   1NO 2NO+1NC
61G	[L] FY 61GD6D0A   2NO 1NO+1NC	FY 61GD7D0A   2NO 1NO+1NC	FY 61GD7E0A   2NO 1NO+1NC
61H	[L] FY 61HD6D0A   2NO 2NC	FY 61HD7D0A   2NO 2NC	FY 61HD7E0A   2NO 2NC
61M	[L] FY 61MD6D0A   3NO 1NC	FY 61MD7D0A   3NO 1NC	FY 61MD7E0A   3NO 1NC
61R	[L] FY 61RD6D0A   1NO+3NC /	FY 61RD7D0A   1NO+3NC /	FY 61RD7E0A   1NO+3NC /
61S	[L] FY 61SD6D0A   3NO+1NC /	FY 61SD7D0A   3NO+1NC /	FY 61SD7E0A   3NO+1NC /
Actuating force	30 N (60 N )		
Travel diagrams	Page 465		

**Legend:** With positive opening according to EN 60947-5-1, interlock with lock monitoring acc. to EN ISO 14119


**Note:** The position of the contacts depending on the switch state can be found on pages 129-130 by replacing codes FG with FY.

**Note:** See pages 155-156 for the connection diagrams for M12 and M23 connector contact blocks.


## Switch with integrated field-wireable control devices

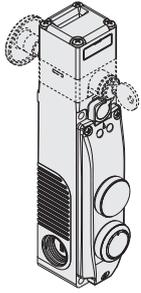


FY 6.....-N07			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Illuminated button, spring-return 1NO	white	

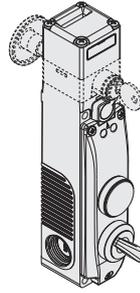


FY 6.....-N10			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Selector switch 1NO with two fixed positions	black	

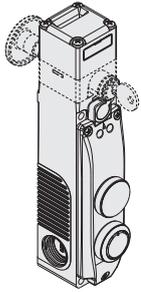


FY 6.....-N08			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Illuminated button, spring-return 1NO	blue	

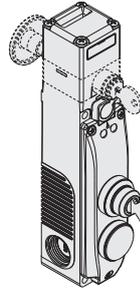


FY 6.....-N11			
	Description	Colour	Diagram
Device 1	Three-position key selector switch 2NO with return to centre	black	
Device 2	Closing cap	black	/

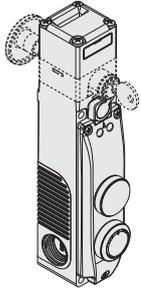


FY 6.....-N09			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Spring-return button 1NO	black	

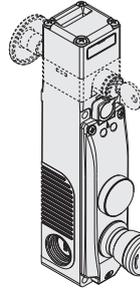


FY 6.....-N12			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Emergency stop button with rotary release 2NC	red	

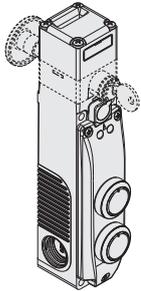


FY 6.....-N04			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Illuminated button, spring-return 1NO	blue	

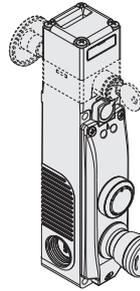


FY 6.....-N01			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Emergency stop button with rotary release 2NC	red	

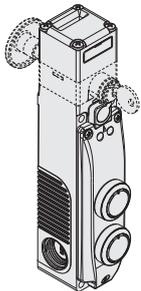


FY 6.....-N05			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Spring-return button 1NO	black	

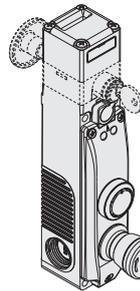

FY 6.....-N02			
	Description	Colour	Diagram
Device 1	Spring-return button 1NO	black	
Device 2	Emergency stop button with rotary release 2NC	red	

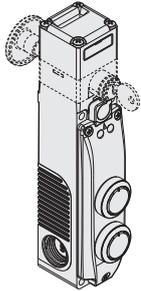

FY 6.....-N06			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	yellow	
Device 2	Illuminated button, spring-return 1NO	blue	

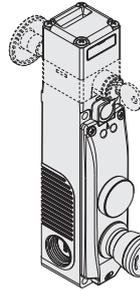




FY 6.....-N03			
	Description	Colour	Diagram
Device 1	Indicator light	yellow	
Device 2	Emergency stop button with rotary release 2NC	red	



### Internal connections (version with integrated control devices to be connected)


Internal terminal strip for switch contact blocks

Internal terminal strip on the cover for integrated control devices

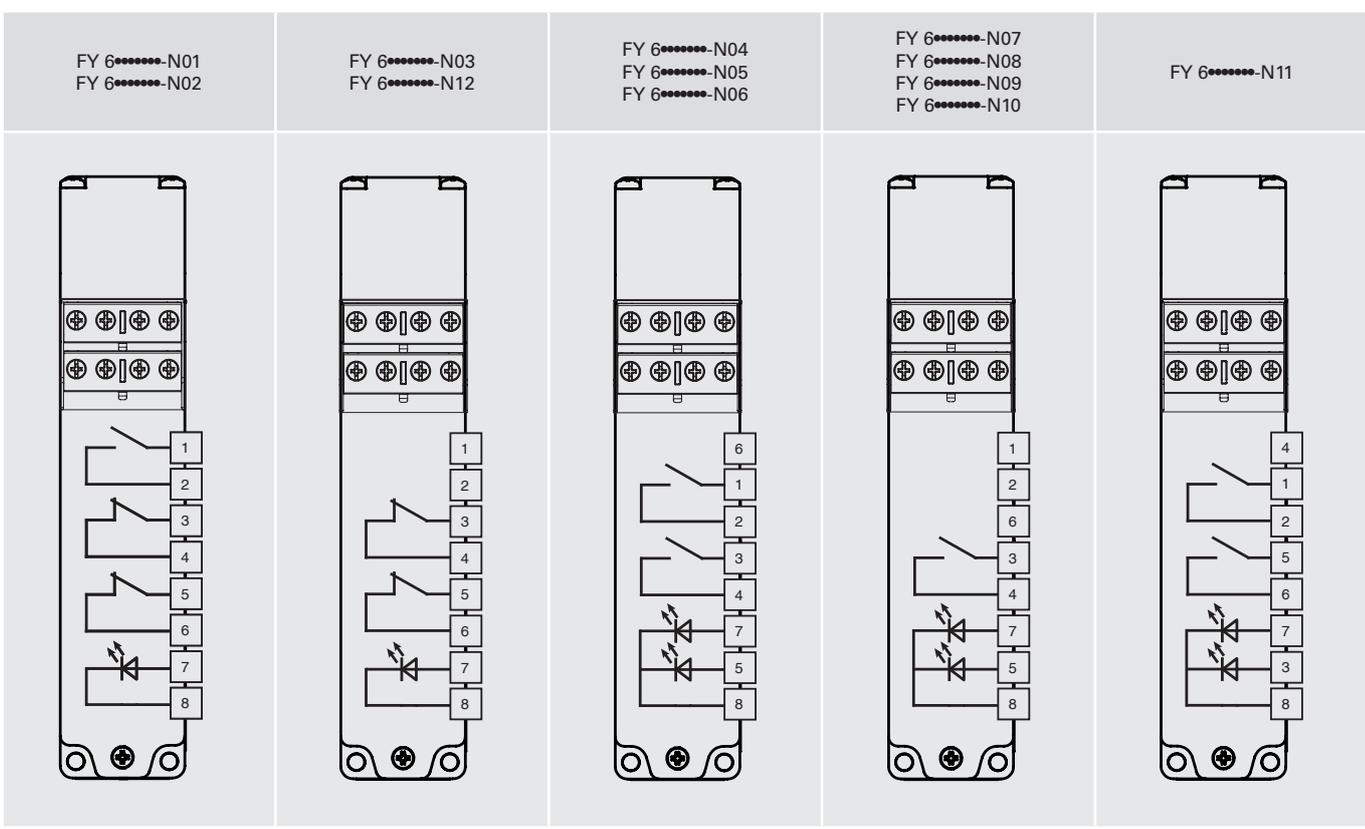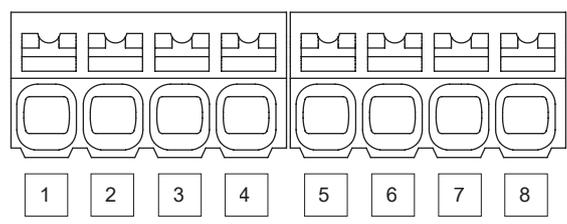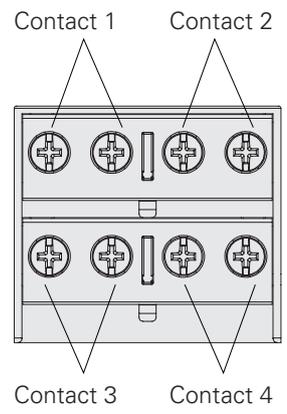


**Note:** The position of the contacts depending on the switch state can be found on pages 129-130 by replacing codes FG with FY.


## Switch with integrated control devices and M23 connector, 19-pole

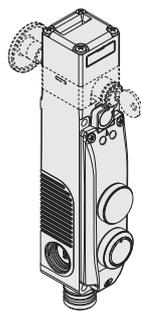


FY 6.....-N07K823			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Illuminated button, spring-return 1NO	white	

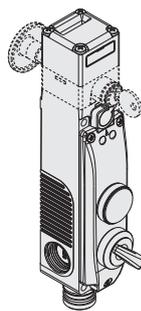


FY 6.....-N10K823			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Selector switch 1NO with two fixed positions	black	

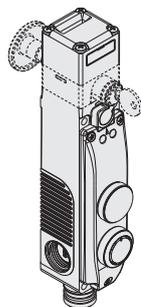


FY 6.....-N08K823			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Illuminated button, spring-return 1NO	blue	

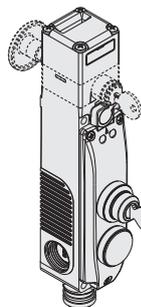


FY 6.....-N11K824			
	Description	Colour	Diagram
Device 1	Three-position key selector switch 2NO with return to centre	black	
Device 2	Closing cap	black	/

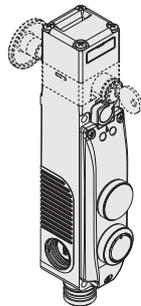


FY 6.....-N09K823			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Spring-return button 1NO	black	

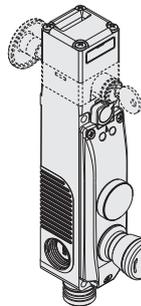


FY 6.....-N12K821			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Emergency stop button with rotary release 2NC	red	

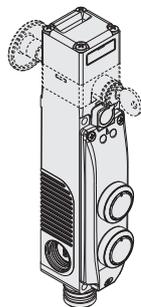


FY 6.....-N04K822			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Illuminated button, spring-return 1NO	blue	

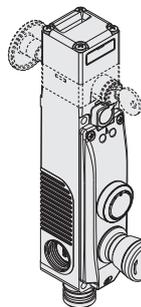


FY 6.....-N01K820			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Emergency stop button with rotary release 2NC	red	

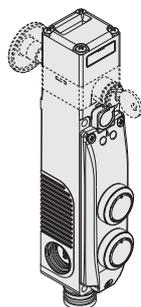


FY 6.....-N05K822			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Spring-return button 1NO	black	

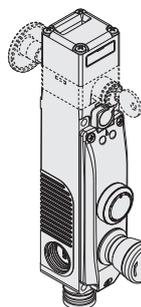

FY 6.....-N02K820			
	Description	Colour	Diagram
Device 1	Spring-return button 1NO	black	
Device 2	Emergency stop button with rotary release 2NC	red	

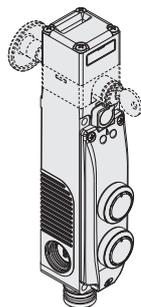

FY 6.....-N06K822			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	yellow	
Device 2	Illuminated button, spring-return 1NO	blue	

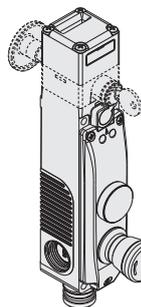


FY 6.....-N03K821			
	Description	Colour	Diagram
Device 1	Indicator light	yellow	
Device 2	Emergency stop button with rotary release 2NC	red	



### Internal connections (version with integrated control devices)

#### M23 connector, 19-pole



To connect the switch contact block to the 19-pole M23 connector, see pin numbers 1 to 10 of the diagrams on page 156.

FY 6*****-N01K820 FY 6*****-N02K820	FY 6*****-N03K821 FY 6*****-N12K821	FY 6*****-N04K822 FY 6*****-N05K822 FY 6*****-N06K822	FY 6*****-N07K823 FY 6*****-N08K823 FY 6*****-N09K823 FY 6*****-N10K823	FY 6*****-N11K824

Female connectors see page 419

### Stainless steel actuators

**IMPORTANT:** These actuators can be used only with items of the FG and FY series (e.g. FY 60AD1D0A-F20).  
Low level of coding acc. to EN ISO 14119.

	Article	Description
	VF KEYF20	Straight actuator

	Article	Description
	VF KEYF21	Angled actuator




	Article	Description
	VF KEYF22	Actuator with rubber pads

### Universal actuator VF KEYF28

**IMPORTANT:** These actuators can be used only with items of the FG and FY series (e.g. FY 60AD1D0A-F28).  
Low level of coding acc. to EN ISO 14119.

	Article	Description
	VF KEYF28	Universal actuator

Jointed actuator for guards with poor alignment, adjustable in two dimensions for small doors; can be mounted in various positions. The metal fixing body has two pairs of bore holes; it is provided for rotating the working plane of the actuator by 90°.

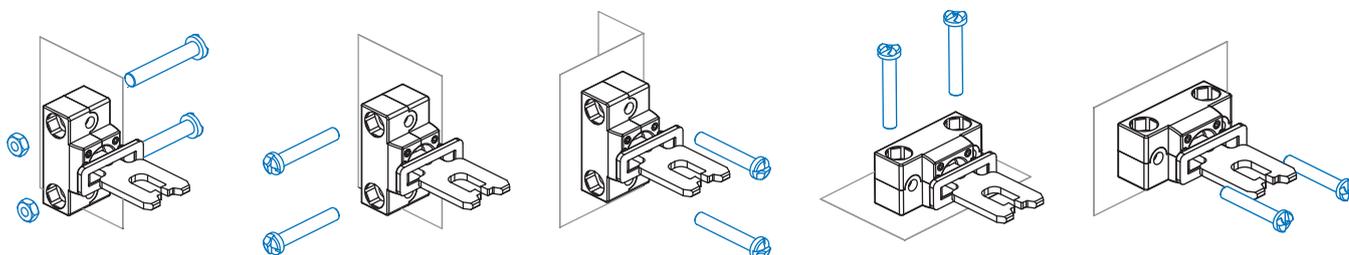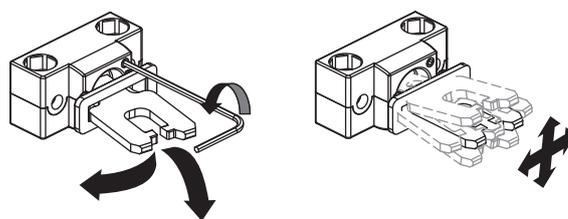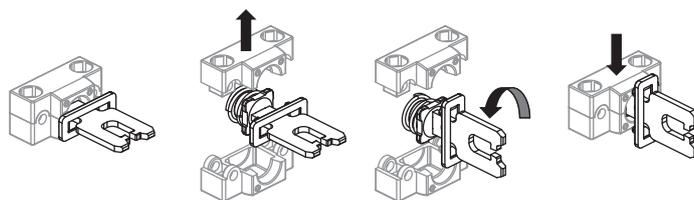


### Auxiliary key release with triangular key



Articles with the V70 and V73 option have an auxiliary key release with a triangular key that meets DIN 22417 standards.

This type of lock can be used in situations where the switch must only be unlocked using the corresponding triangular key, a tool which is not usually available.

There are two versions of the triangular key release: with a spring return (option V70) and without a spring return (option V73).





## Available control devices

	Description	Colour	Spare part number	Combinable with contacts <sup>(1)</sup>	Protrusion (x) mm
	Illuminated button, spring-return	<ul style="list-style-type: none"> <li>● White</li> <li>● Red</li> <li>● Green</li> <li>● Yellow</li> <li>● Blue</li> </ul>	VN NG-AC27121 VN NG-AC27123 VN NG-AC27124 VN NG-AC27125 VN NG-AC27126	1NO (1NC) (2NO) (1NO+1NC)	3
	Non-illuminated button, spring-return	● Black	VN NG-AC27122	1NO (1NC) (2NO) (1NO+1NC)	3
	Non-laser-markable, illuminated, projecting spring-return push button	● Red	VN NG-AC26018	1NO (1NC) (2NO) (1NO+1NC)	6,1
	Indicator light	<ul style="list-style-type: none"> <li>● Red</li> <li>● Yellow</li> <li>● Green</li> <li>● Blue</li> <li>● White</li> </ul>	VN NG-AC26060 VN NG-AC26061 VN NG-AC26062 VN NG-AC26063 VN NG-AC26064	/	2,7
	Emergency stop button acc. to EN ISO 13850				
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Red</li> <li>● Red</li> </ul>	VN NG-AC26052 VN NG-AC26055	2NC	26,4
	Emergency stop button acc. to EN ISO 13850 for 2NC + 1NO contacts, spring-return <sup>(2)</sup>				
	Rotary release	● Red	VN NG-AC26056	2NC + 1NO, spring-return	26,4
	Illuminated emergency stop button acc. to EN ISO 13850				
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Red</li> <li>● Red</li> </ul>	VN NG-AC26051 VN NG-AC26054	2NC	26,4
	Simple stop button				
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Black</li> <li>● Black</li> </ul>	VN NG-AC26053 VN NG-AC26057	2NC	26,4
	Illuminated selector switch with handle, with transparent lens for LED				
	<ul style="list-style-type: none"> <li>∨</li> <li>▷</li> <li>∨</li> <li>∨</li> </ul>	<ul style="list-style-type: none"> <li>● Black</li> <li>● Black</li> <li>● Black</li> <li>● Black</li> </ul>	VN NG-AC26033 VN NG-AC26030 VN NG-AC26034 VN NG-AC26031	1NO (1NC) (2NO) (1NO+1NC)	16,8
	Key selector switch, 2 positions				
	<ul style="list-style-type: none"> <li>∨</li> <li>▷</li> <li>∨</li> </ul>	<ul style="list-style-type: none"> <li>● Black</li> <li>● Black</li> <li>● Black</li> </ul>	VN NG-AC26043 VN NG-AC26040 VN NG-AC26041	1NO (1NC) (2NO) (1NO+1NC)	39 (a) 14 (b)
	Closing cap	● Black	VN NG-AC26020	/	2,7
	Fixing key	● Black	VN NG-AC26080	/	/

**Legend:**  Maintained  Spring-return  Key extraction position (a) with key (b) without key

<sup>(1)</sup> The contacts in brackets are on request. Contact our technical department to verify the effective feasibility of the control device unit with the chosen combination of control devices.

<sup>(2)</sup> The NO contact with spring-return is only activated if the emergency stop button reaches the stop. The signal of the NO contact is captured by analysing the rising edge.

**To order buttons with marking:**

add the marking code indicated in the tables on pp. 165-168 to the article codes of the General Catalogue HMI 2023-2024.

Example: Black spring-return button with "O" engraving.

VN NG-AC27122 → VN NG-AC27122-L1



## Technical data of the control devices

### General data

Protection degree:	IP65 acc. to EN 60529
Mechanical endurance:	
Spring-return button:	1 million operating cycles
Emergency stop button:	50,000 operating cycles
Selector switch:	300,000 operating cycles
Key selector switch:	50,000 operating cycles
	30,000 operating cycles including removal of the key
Safety parameter $B_{10D}$ :	100,000 (emergency stop button)

### Actuating force

Spring-return button:	4 N min	100 N max.
Emergency stop button:	20 N min	100 N max.
Selector switch:	0.1 Nm min	1.5 Nm max.
Key selector switch:	0.1 Nm min	1.3 Nm max.

### Contact blocks of the control devices

Material of the contacts:	silver contacts
Contact type:	Self-cleaning contacts with double interruption

### Electrical data:

Thermal current $I_{th}$ :	1 A
Rated insulation voltage $U_i$ :	32 Vac/dc
Rated impulse withstand voltage $U_{imp}$ :	1.5 kV
LED supply voltage:	24 Vdc $\pm$ 15%
LED supply current:	10 mA per LED

### Utilization category of the contact block:

Direct current: DC13
$U_e$ (V) 24
$I_e$ (A) 0.55

### Signalling contact with spring return:

Direct current: DC13
$U_e$ (V) 24
$I_e$ (mA) 10


### In compliance with standards:

IEC 60947-5-1, IEC 60947-5-5, EN ISO 13850

### ⚠ Installation for safety applications:

Always connect the safety circuit to the **NC contacts** (normally closed contacts) as stated in standard EN 60947-5-1.

## Accessories

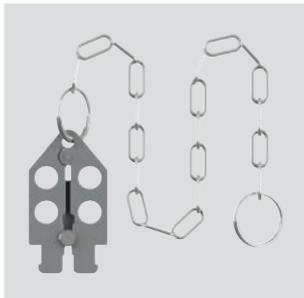Article	Description
VF KB2	Lock out device
	Padlockable lock out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area. To be used only with FG and FY series switches (e.g. FY 60AD1D0A). Hole diameter for padlocks: 9 mm.
	Set of two locking keys
	Extra copy of the locking keys to be purchased if further keys are needed (standard supply: 2 units). The keys of all switches have the same code. Other codes on request.

Article	Description
VF KLA371	Set of two locking keys
	Extra copy of the locking keys to be purchased if further keys are needed (standard supply: 2 units). The keys of all switches have the same code. Other codes on request.

## Release button



Article	Description
VF FG-LP15	Technopolymer release button for max. 15 mm wall thickness, supplied with screw
VF FG-LP30	Technopolymer release button for max. 30 mm wall thickness, supplied with screw
VF FG-LP40	Technopolymer release button for max. 40 mm wall thickness, supplied with screw
VF FG-LP60	Metal release button for max. 60 mm wall thickness, supplied with screw




Article	Description
VF FG-LPRG	Metal release button for wall thickness from 60 to 500 mm, supplied with 2 supports and 2 screws, without M10 threaded bar

The M10 bar can be supplied in zinc-plated steel with 1 m length. Article: AC 8512.

## Wiring diagram for M12 connectors

## M12 connector, 12-pole



Contact block 60A 2NO+2NC		Contact block 60B 1NO+3NC		Contact block 60C 4NC		Contact block 60D 1NO+3NC		Contact block 60E 1NO+3NC		Contact block 60F 2NO+2NC		Contact block 60G 4NC		Contact block 60H 4NC		Contact block 60I 1NO+3NC		Contact block 60L 2NO+2NC									
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.								
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2						
NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6		
NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NO	7-8		
NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NC	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10

Contact block 60M 3NO+1NC		Contact block 60N 3NO+1NC		Contact block 60P 4NC		Contact block 60R 2NO+2NC		Contact block 60S 2NO+2NC		Contact block 60T 1NO+3NC		Contact block 60U 4NC		Contact block 60V 2NO+2NC		Contact block 60X 1NO+3NC		Contact block 60Y 2NO+2NC									
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.								
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2						
NO	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NO	3-4	NO	3-4	NC	3-4	NC	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6		
NO	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NO	7-8	NO	7-8
NO	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NC	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10


Contact block 61A 1NO+3NC		Contact block 61B 2NO+2NC		Contact block 61C 3NO+1NC		Contact block 61D 3NO+1NC		Contact block 61E 3NO+1NC		Contact block 61G 3NO+1NC		Contact block 61H 2NO+2NC		Contact block 61M 3NO+1NC		Contact block 61R 1NO+3NC		Contact block 61S 3NO+1NC									
Contacts	Pin no.																										
A1-A2	1-2	A1-A2	1-2																								
NC	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4	NO	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4		
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6																		
NC	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NO	7-8	NO	7-8														
NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10																		

**Note:** the wires connected to pins 11 and 12 of the M12 connector can be used to activate the LEDs in FY series configurations with freely connectable LEDs.




# Wiring diagram for M23 connectors

## M23 connector, 12-pole



## M23 connector, 19-pole



Refer to the diagrams on page 148 (connector pins 11-19) for the connections of the internal terminal strip of the control devices

Contact block 60A 2NO+2NC		Contact block 60B 1NO+3NC		Contact block 60C 4NC		Contact block 60D 1NO+3NC		Contact block 60E 1NO+3NC		Contact block 60F 2NO+2NC		Contact block 60G 4NC		Contact block 60H 4NC		Contact block 60I 1NO+3NC		Contact block 60L 2NO+2NC					
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.		
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2		
NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6
NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8
NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NC	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10

Contact block 60M 3NO+1NC		Contact block 60N 3NO+1NC		Contact block 60P 4NC		Contact block 60R 2NO+2NC		Contact block 60S 2NO+2NC		Contact block 60T 1NO+3NC		Contact block 60U 4NC		Contact block 60V 2NO+2NC		Contact block 60X 1NO+3NC		Contact block 60Y 2NO+2NC					
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.		
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2		
NO	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6
NO	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NO	7-8	NC	7-8
NO	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10

Contact block 61A 1NO+3NC		Contact block 61B 2NO+2NC		Contact block 61C 3NO+1NC		Contact block 61D 3NO+1NC		Contact block 61E 3NO+1NC		Contact block 61G 3NO+1NC		Contact block 61H 2NO+2NC		Contact block 61M 3NO+1NC		Contact block 61R 1NO+3NC		Contact block 61S 3NO+1NC			
Contacts	Pin no.	Contacts	Pin no.																		
A1-A2	1-2	A1-A2	1-2																		
NC	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4	NO	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NO	3-4
NC	5-6	NC	5-6																		
NC	7-8	NO	7-8	NC	7-8	NO	7-8														
NO	9-10	NO	9-10																		

**Note:** the wires connected to pins 11 and 12 of the M23 12-pole connector can be used to activate the LEDs in FY series configurations with freely connectable LEDs.

## Description




These switches are used on machines where the hazardous conditions remain for a while, even after the machines have been switched off, for example because of mechanical inertia of pulleys, saw disks, parts under pressure or with high temperatures. Thus, the switches can also be used if individual guards are only to be opened under certain conditions.

The versions with solenoid actuated NC contacts are considered interlocks with locking in accordance with ISO 14119, and the product's label is marked with the symbol shown.




## Head and release devices with variable orientation

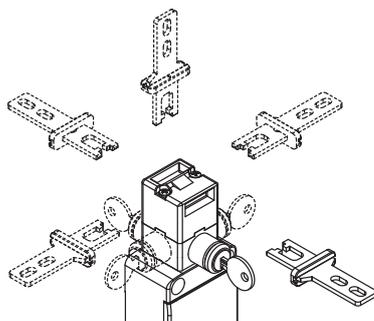

The head can be quickly turned to each of the four sides of the switch by unfastening the two fastening screws.


The auxiliary key release device can be rotated in 90° steps as well. This enables the switch to assume 32 different configurations.

## Wide-ranging actuator travel

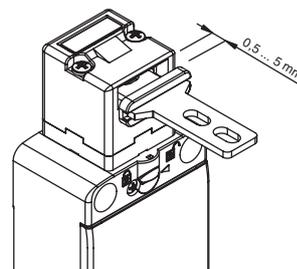


The actuation head of this switch features a wide range of travel. In this way the guard can oscillate along the direction of insertion (4.5 mm) without causing unwanted machine shutdowns. This wide range of travel is available in all actuators in order to ensure maximum device reliability.

## Holding force of the locked actuator

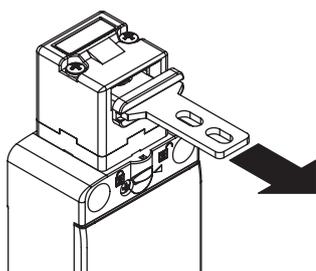

The robust interlocking system guarantees a maximum actuator holding force of  $F_{1max} = 1100 \text{ N}$ .

## Safety screws for actuators



As required by EN ISO 14119, the actuator must be fixed immovably to the guard frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 419.

## Protection degree IP67


**IP67** These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing.

## Contact blocks




Contact blocks with captive screws, finger protection, twin bridge contacts and double interruption for higher contact reliability. Versions with gold-plated contacts available. Available in multiple variants with actuation by actuator or by solenoid.

## Turnable key release with lock

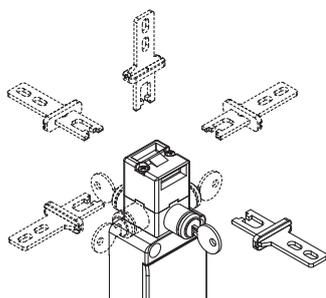

The auxiliary key release device is used to allow the maintenance or the entry into the machinery to authorized personnel only. Turning the key corresponds to actuating the solenoid: the actuator is released. The device can be turned, thereby enabling installation of the safety switch in the machine while the release device remains accessible on the outside of the guard.

## Circuit board for monitoring the current consumption of the solenoid



This technical solution resolves the problems that may derive from unstable power supply (machine distance from main transformers, voltage variation between night/day hours), allowing also a low solenoid power consumption and consequently enlarging the working temperature range of the switch.

## Key release with triangular key



The auxiliary key release is also available with option V73, a variant with triangular key acc. to DIN 22417. This option can be used with installations in which the auxiliary release is to be actuated with a triangular key that is not normally available.

On request, option V70 is also available, with which the auxiliary release returns to the initial position with the aid of a spring.




### Laser engraving



All FS series switches are permanently marked with a special laser system. As a result, the marking remains legible even under extreme operating conditions. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.

### Holding force of the unlocked actuator

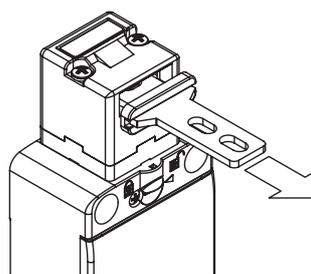

The inside of each switch features a device which holds the actuator in its closed position. Ideal for all those applications where several guards are unlocked simultaneously, but only one is actually opened. The device keeps all the unlocked guards in their position with a retaining force of approx. 30 N, stopping any vibrations or gusts of wind from opening them.

### Two operating principles

**D or E** The safety switches with solenoid offer two different operating principles for the actuator locking:

Operating principle D: locked actuator with de-energised solenoid. The actuator is released by applying the power supply to the solenoid.

Operating principle E: locked actuator with energised solenoid. The actuator is released by switching off the power supply to the solenoid. This version should only be used under certain conditions, since a power failure at the system will result in the immediate opening of the guard.


### Sealable auxiliary release device



Switches with locked actuator with deactivated solenoid (function principle D) are equipped with an auxiliary release device for the solenoid to simplify installation of the switch and to facilitate entry into the danger zone in the event of a power failure. The auxiliary


release device acts on the switch exactly as if the solenoid was energised. As a result, it also actuates the electrical contacts. Can only be actuated with a couple of tools, this ensures adequate resistance to tampering. If required it can be sealed by means of the hole provided.

### Cable outlets

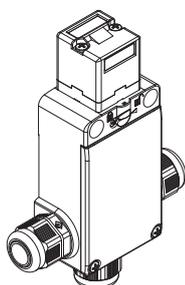

The switch is provided with three cable entries in different directions. This allows its application in series connections or in narrow places.

### Gold-plated contacts



The contact blocks of these devices can be supplied gold-plated upon request. Ideal for applications with low voltages or currents; it ensures increased contact reliability. Available in two thicknesses (1 or 2.5 microns), it adapts perfectly to the various fields of application, ensuring a long endurance over time.

### LED signalling lights




Thanks to the three threaded cable entries, the high luminosity LED signalling lights of the VF SL series can be installed on the switch.

The LED signalling lights can be easily installed by screwing them on one of the conduit entries not used for electric cables. They can be used for many different purposes: for example, to signal, from a distance, whether the switch has been actuated; whether the guard has closed correctly; or whether the guard is locked or unlocked.

For more information see chapter Accessories, page 419.

Selection diagram

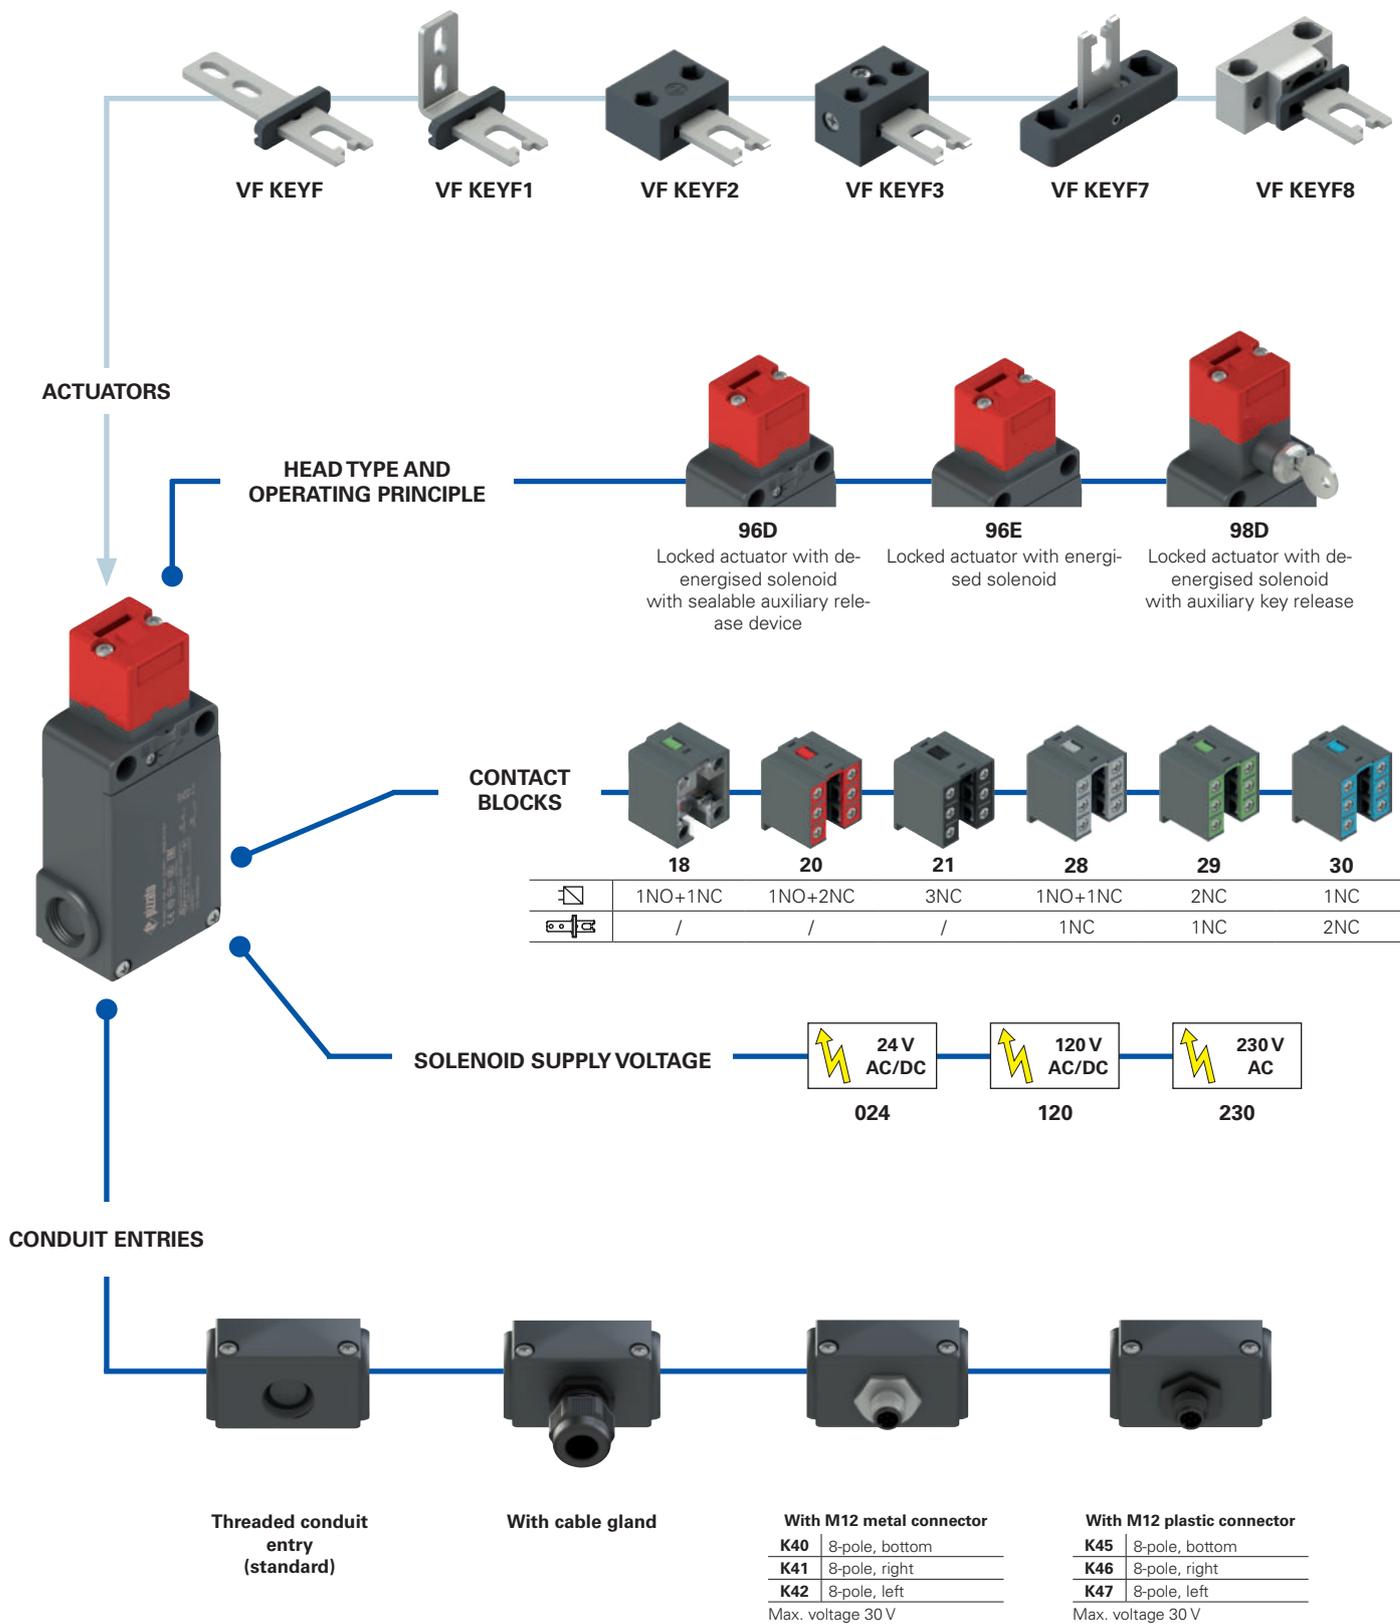

● product option  
 → Sold separately as accessory



## Code structure

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article
options
options

**FS 1896D024-F1GM2K40V34**

## Contact blocks

	Contacts activated by the solenoid	Contacts activated by the actuator
<b>18</b>	1NO+1NC	/
<b>20</b>	1NO+2NC	/
<b>21</b>	3NC	/
<b>28</b>	1NO+1NC	1NC
<b>29</b>	2NC	1NC
<b>30</b>	1NC	2NC

## Auxiliary release options

(only for articles FS \*\*98D\*\*)

	The key can be removed in locked and unlocked actuator position (standard)
<b>V34</b>	The key can be removed only in the locked position of the actuator
<b>V70</b>	Key release with triangular key with spring return
<b>V73</b>	Key release with triangular key, no spring return

## Head type and operating principle

<b>96D</b>	locked actuator with de-energised solenoid with sealable auxiliary release device
<b>96E</b>	locked actuator with energised solenoid
<b>98D</b>	locked actuator with de-energised solenoid with auxiliary key release

## Solenoid supply voltage

<b>024</b>	24 Vac/dc (-10% ... +25%)
<b>120</b>	120 Vac/dc (-15% ... +20%)
<b>230</b>	230 Vac (-15% ... +10%)

## Pre-installed cable glands or connectors

	no cable gland or connector (standard)
<b>K23</b>	cable gland for cables Ø 6 ... 12 mm
...	...
<b>K40</b>	M12 metal connector, 8-pole
...	...
<b>K45</b>	M12 plastic connector, 8-pole
...	...

For the complete list of possible combinations please contact our technical department.

## Actuators

	without actuator (standard)
<b>F</b>	straight actuator VF KEYF
<b>F1</b>	angled actuator VF KEYF1
<b>F2</b>	jointed actuator VF KEYF2
<b>F3</b>	jointed actuator adjustable in two directions VF KEYF3
<b>F7</b>	jointed actuator adjustable in one direction VF KEYF7
<b>F8</b>	universal actuator VF KEYF8

## Threaded conduit entry

<b>M2</b>	M20x1.5 (standard)
	PG 13.5

## Contact type

	silver contacts (standard)
<b>G</b>	silver contacts with 1 µm gold coating
<b>G1</b>	silver contacts, 2.5 µm gold coating (not for contact blocks 20, 21, 28, 29, 30)



### Main features

- Technopolymer housing, three conduit entries
- Protection degree IP67
- 6 contact blocks available
- 6 stainless steel actuators available
- 3 solenoid supply voltages available
- Versions with auxiliary release device or turnable lock
- Operation with energised or de-energised solenoid

### Quality marks:



IMQ approval:	CA02.03808
UL approval:	E131787
CCC approval:	2021000305000098
EAC approval:	RU C-IT.YT03.B.00035/19

### Technical data

#### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation:	<input type="checkbox"/>
Three knock-out threaded conduit entries:	M20x1.5 (standard)
Protection degree:	IP67 acc. to EN 60529 with cable gland of equal or higher protection degree

#### General data

SIL (SIL CL) up to:	SIL 3 acc. to EN 62061
Performance Level (PL) up to:	PL e acc. to EN ISO 13849-1
Interlock with mechanical lock, coded:	type 2 acc. to EN ISO 14119
Coding level:	low acc. to EN ISO 14119
Safety parameters:	
$B_{10D}$ :	4,000,000 for NC contacts
Mission time:	20 years
Ambient temperature:	-25°C ... +60°C
Max. actuation frequency:	600 operating cycles/hour
Mechanical endurance:	800,000 operating cycles
Max. actuation speed:	0.5 m/s
Min. actuation speed:	1 mm/s
Maximum force before breakage $F_{1max}$ :	1100 N (head 96), 900 N (head 98) acc. to EN ISO 14119
Max. holding force $F_{Zh}$ :	846 N (head 96), 692 N (head 98) acc. to EN ISO 14119
Maximum clearance of locked actuator:	4.5 mm
Released actuator extraction force:	30 N
Tightening torques for installation:	see page 441
Wire cross-sections and wire stripping lengths:	see page 466

#### Solenoid

Duty cycle:	100% ED (continuous operation)
Solenoid inrush power:	20 VA 0.1 s (24 V) 18 VA 0,1 s (120 V) 18 VA 0,1 s (230 V)
Solenoid consumption:	4 VA
Average overall consumption:	10 VA

**Notes:** Calculate the power supply using the average overall consumption. Please consider the solenoid inrush power in order to avoid intervention of overload-protection in case of electronic power supply.

#### In compliance with standards:

IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, IEC 61000-6-2, IEC 61000-6-3, EN IEC 63000, BG-GS-ET-15, BG-GS-ET-19, UL 508, CSA C22.2 No. 14.

#### Approvals:

EN 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5

#### Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

#### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

**⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 443 to 454.**

### Electrical data

### Utilization category

without connector	Thermal current ( $I_{th}$ ):	10 A	Alternating current: AC15 (50-60 Hz)	
	Rated insulation voltage ( $U_i$ ):	500 Vac 600 Vdc	$U_e$ (V)	250    400    500
	Rated impulse withstand voltage ( $U_{imp}$ ):	400 Vac 500 Vdc (contact blocks 20, 21, 28, 29, 30)	$I_e$ (A)	6    4    1
		6 kV	Direct current: DC13	
with M12 connector, 8-pole	Conditional short circuit current:	4 kV (contact blocks 20, 21, 28, 29, 30)	$U_e$ (V)	24    125    250
	Protection against short circuits:	1000 A acc. to EN 60947-5-1	$I_e$ (A)	3    0.55    0.3
	Pollution degree:	type aM fuse 10 A 500 V		
		3		
with M12 connector, 8-pole	Thermal current ( $I_{th}$ ):	2 A	Alternating current: AC15 (50-60 Hz)	
	Rated insulation voltage ( $U_i$ ):	30 Vac 36 Vdc	$U_e$ (V)	24
	Protection against short circuits:	type gG fuse 2 A 500 V	$I_e$ (A)	2
	Pollution degree:	3	Direct current: DC13	
		$U_e$ (V)	24	
		$I_e$ (A)	2	



### Features approved by IMQ

Rated insulation voltage (U<sub>i</sub>): 500 Vac  
400 Vac (for contact blocks 20, 21, 28, 29, 30)

Conventional free air thermal current (I<sub>th</sub>): 10 A

Protection against short circuits: type aM fuse 10 A 500 V

Rated impulse withstand voltage (U<sub>imp</sub>): 6 kV  
4 kV (for contact blocks 20, 21, 28, 29, 30)

Protection degree of the housing: IP67

MV terminals (screw terminals)

Pollution degree: 3

Utilization category: AC15

Operating voltage (U<sub>op</sub>): 400 Vac (50 Hz)

Operating current (I<sub>o</sub>): 3 A

Forms of the contact element: Zb, Y+Y+X, Y+Y+Y, Y+X+X

Positive opening contacts on contact blocks 18, 20, 21, 28, 29, 30

In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

### Features approved by UL

Electrical Ratings: Q300 pilot duty (69 VA, 125-250 V dc)  
A600 pilot duty (720 VA, 120-600 V ac)

Environmental Ratings: Types 1, 4X, 12, 13

Use 60 or 75 °C copper (Cu) conductor and wire size range 12, 14 AWG, stranded or solid. The terminal tightening torque of 7.1 lb in (0.8 Nm).

Please contact our technical department for the list of approved products.

### Wiring diagram for M12 connectors

Contact block 18 1NO+1NC		Contact block 20 1NO+2NC		Contact block 21 3NC		Contact block 28 1NO+2NC		Contact block 29 3NC		Contact block 30 3NC	
M12 connector, 8-pole		M12 connector, 8-pole		M12 connector, 8-pole		M12 connector, 8-pole		M12 connector, 8-pole		M12 connector, 8-pole	
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2
NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4
NO	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6
		NO	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8

### Operating principle

The operating principle of these safety switches allows three different operating states:

**state A**: with inserted and locked actuator

**state B**: with inserted but not locked actuator


**state C**: with extracted actuator

All or some of these states can be monitored by means of electrical contacts with positive opening by selecting the appropriate contact blocks. In detail, contact blocks that have electric contacts marked with the symbol of the solenoid ( $\square$ ) are switched in the transition between the state A and state B, while the electric contacts marked with the symbol of the actuator ( $\square$ ) are switched between state B and state C.

It is also possible to choose between two operating principles for the actuator locking:

- Operating principle D: locked actuator with de-energised solenoid. The actuator is released by applying the power supply to the solenoid (see example of the operating phases).
- Operating principle E: locked actuator with energised solenoid. The actuator is released by switching off the power supply to the solenoid. This version should only be used under certain conditions, since a power failure at the system will result in the immediate opening of the guard.


### Example: operating phases with FS 2896D024-F1 (switch with operating principle D)

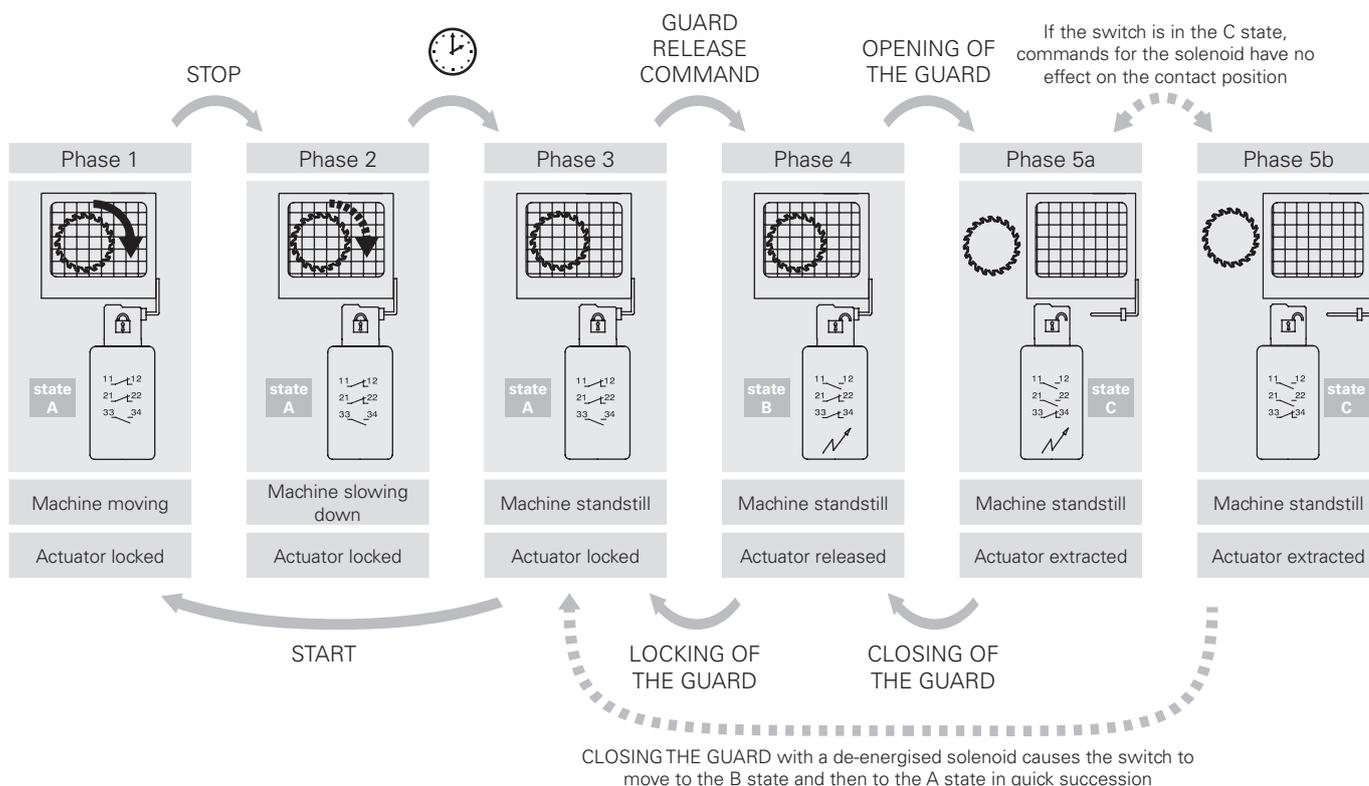

### Installation of two or more switches connected to the same power supply

#### 24 V AC/DC versions only

- This operation is intended to reduce the effects of the combined solenoid inrush currents on the power supply and should only be executed if necessary and with great care.
- Switch off the power supply.
- Open the switch cover.
- Loosen the two screws that secure the black plastic protective cover of the solenoid to the switch body and remove the plastic protective cover.
- Use a pin to set the selector switch so that each switch has a different combination (see figure at the side). If more than two switches are installed, repeat the combinations for any next set of two switches.
- Reposition the black plastic protective cover and tighten the two screws with a torque of 0.8 Nm.

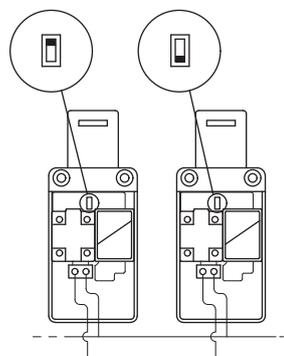



## Contact positions related to switch states

Operating state	Operating principle D locked actuator with de-energised solenoid			Operating principle E locked actuator with energised solenoid		
	state A	state B	state C	state A	state B	state C
	Inserted and locked	Inserted and released	Extracted	Inserted and locked	Inserted and released	Extracted
Solenoid	De-energised	Energised	-	Energised	De-energised	-
<b>FS 18</b> ..... 1NO+1NC controlled by the solenoid						
<b>FS 20</b> ..... 1NO+2NC controlled by the solenoid						
<b>FS 21</b> ..... 3NC controlled by the solenoid						
<b>FS 28</b> ..... 1NO+1NC controlled by the solenoid 1NC controlled by the actuator						
<b>FS 29</b> ..... 2NC controlled by the solenoid 1NC controlled by the actuator						
<b>FS 30</b> ..... 1NC controlled by the solenoid 2NC controlled by the actuator						




## Limits of use

Do not use where dust and dirt may penetrate in any way into the head and deposit there. Especially not where powder, shavings, concrete or chemicals are sprayed. Adhere to the EN ISO 14119 requirements regarding low level of coding for interlocks. Do not use in environments with presence of explosive or flammable gas. In these cases, use ATEX products (see dedicated Pizzato catalogue).

**Attention!** These switches alone are not suitable for applications where operators may physically enter the dangerous area, because an eventual closing of the door behind them could restart the machine operation. In these cases, the maintenance personnel must use the actuator entry locking device VF KB1 shown on page 165.

Contact type:

L = slow action

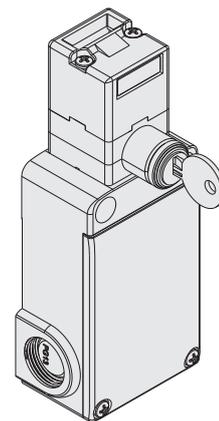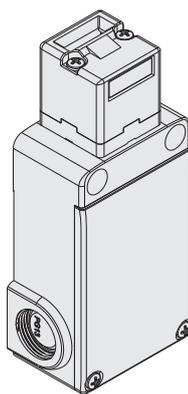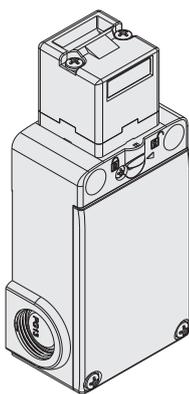

Operating principle	Operating principle D, with sealable auxiliary release device, without actuator		Operating principle E, without actuator		Operating principle D, with auxiliary key release, without actuator		
Contact block							
18	L	FS 1896D024-M2	1NO+1NC	FS 1896E024-M2	1NO+1NC	FS 1898D024-M2	1NO+1NC
20	L	FS 2096D024-M2	1NO+2NC	FS 2096E024-M2	1NO+2NC	FS 2098D024-M2	1NO+2NC
21	L	FS 2196D024-M2	3NC	FS 2196E024-M2	3NC	FS 2198D024-M2	3NC
28	L	FS 2896D024-M2	1NO+2NC	FS 2896E024-M2	1NO+2NC	FS 2898D024-M2	1NO+2NC
29	L	FS 2996D024-M2	3NC	FS 2996E024-M2	3NC	FS 2998D024-M2	3NC
30	L	FS 3096D024-M2	3NC	FS 3096E024-M2	3NC	FS 3098D024-M2	3NC
Actuating force	30 N (40 N						
Travel diagrams	Page 466						

Legend: With positive opening according to EN 60947-5-1, interlock with lock monitoring acc. to EN ISO 14119

### Auxiliary key release with triangular key



Articles with the V70 and V73 option have an auxiliary key release with a triangular key that meets DIN 22417 standards.


This type of lock can be used in situations where the switch must only be unlocked using the corresponding triangular key, a tool which is not usually available.

There are two versions of the triangular key release: with a spring return (option V70) and without a spring return (option V73).



### Accessories

Article	Description
VF KB1	Lock out device

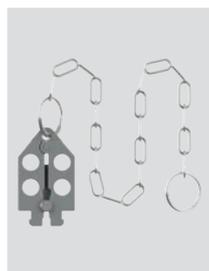

Padlockable lock out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area.  
Hole diameter for padlocks: 9 mm.



Article	Description
VF KLA371	Set of two locking keys



Extra copy of the locking keys to be purchased if further keys are needed (standard supply: 2 units).  
The keys of all switches have the same code.  
Other codes on request.

## Stainless steel actuators

**IMPORTANT:** These actuators can be used only with items of the FD, FP, FL, FC, and FS series (e.g. FS 1896D024-M2).  
Low level of coding acc. to EN ISO 14119.

	Article	Description
	VF KEYF	Straight actuator

	Article	Description
	VF KEYF1	Angled actuator

	Article	Description
	VF KEYF2	Jointed actuator


The actuator can flex in four directions for applications where the guard alignment is not precise.

	Article	Description
	VF KEYF3	Actuator adjustable in two directions

Actuator adjustable in two directions for guards with reduced dimensions.

	Article	Description
	VF KEYF7	Actuator adjustable in one direction


Actuator adjustable in one direction for guards with reduced dimensions.

	Article	Description
	VF KEYF8	Universal actuator


Jointed actuator for guards with poor alignment, adjustable in two dimensions for small doors; can be mounted in various positions. The metal fixing body has two pairs of bore holes; it is provided for rotating the working plane of the actuator by 90°.

Dimensional drawings


Switch FS ●●96D●●●  
Operating principle D,  
with sealable auxiliary release device

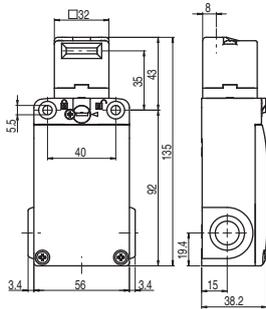


Switch FS ●●96E●●●  
Operating principle E

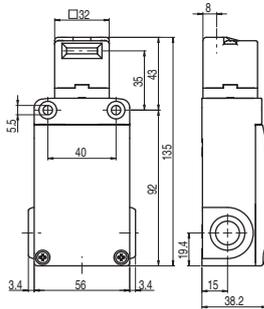


Switch FS ●●98D●●●  
Operating principle D  
with auxiliary key release

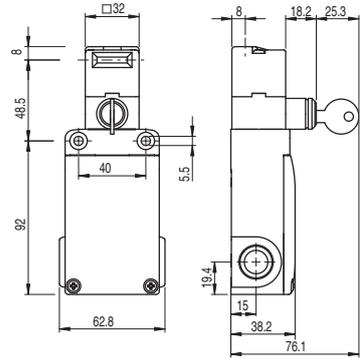


Actuator VF KEYF

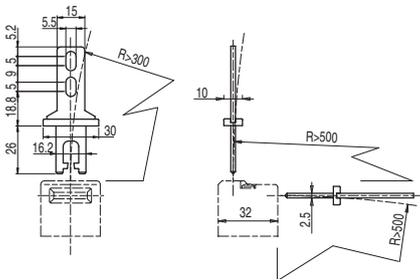


Actuator VF KEYF1

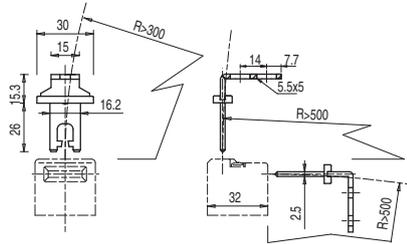


Actuator VF KEYF2

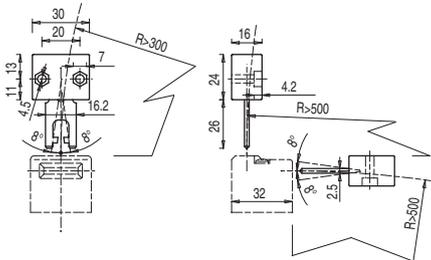


Actuator VF KEYF3

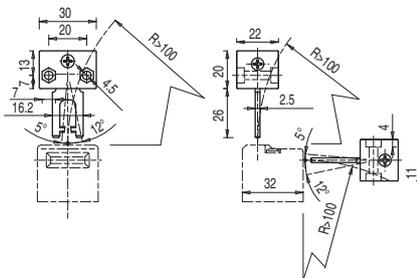

Actuator VF KEYF7

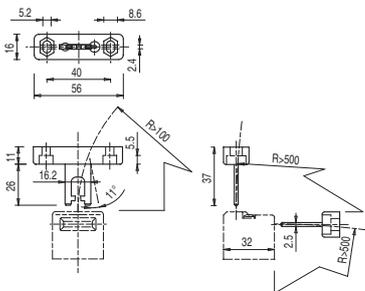

Actuator VF KEYF8

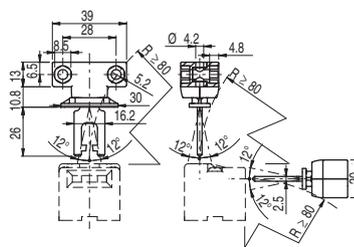

All values in the drawings are in mm



## Description



These switches are used on machines where the hazardous conditions remain for a while, even after the machines have been switched off, for example because of mechanical inertia of pulleys, saw disks, parts under pressure or with high temperatures. Thus, the switches can also be used if individual guards are only to be opened under certain conditions.

Versions with mode 1 and 3 (safety outputs active when guard closed and locked) are interlocks with guard locking acc. to ISO 14119; the product is labelled with the symbol shown.



## Maximum safety with a single device

### PL e + SIL 3


The NG series switches are constructed with redundant electronics. As a result, the maximum PL e and SIL 3 safety levels can still be achieved through the use of a single device on a guard. This avoids expensive wiring in the field and allows faster installation. Inside the control cabinet, the two electronic safety outputs must be connected to a module suitable for managing devices with solid state outputs, or to a safety PLC.

## Series connection of several switches

One of the most important features of the NG series is the possibility of connecting up to 32 sensors in series, while still maintaining the maximum safety levels PL e laid down in EN 13849-1 and SIL 3 acc. to EN IEC 62061:2021.


This connection type is permissible in safety systems which have a safety module at the end of the chain that monitors the outputs of the last NG switch.

The fact that the PL e safety level can be maintained even with 32 sensors connected in series demonstrates the extremely secure structure of each single device.

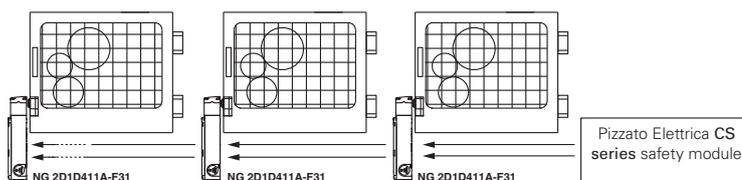

## Series connection with other devices

The NG series features two safety inputs and two safety outputs, which can be connected in series with other Pizzato Elettrica safety devices. This option allows the creation of safety chains containing various devices. For example, stainless steel safety hinges (HX BEE1 series), transponder sensors (ST series) and door lock sensors (NG series) can be connected in series while still maintaining the maximum PL e and SIL 3 safety levels.

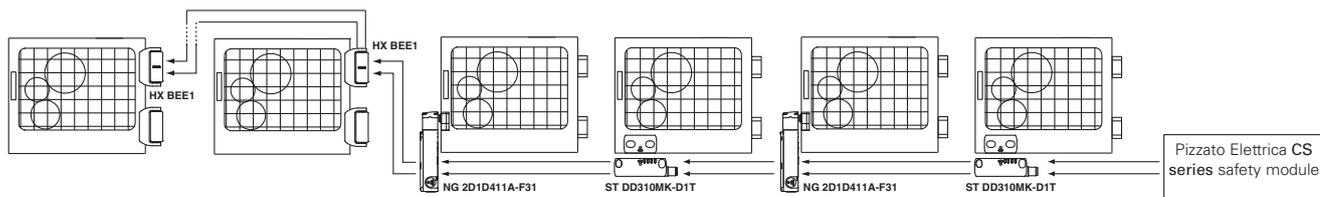


## RFID actuators with high coding level



actuators, according to EN ISO 14119.


The NG series is provided with an electronic system based on RFID technology to detect the actuator. This allows to provide each actuator with different coding and makes it impossible to tamper with a device by using another actuator of the same series. Millions of different coding combinations are possible for the actuators. They are therefore classified as high level coded

## Holding force of the locked actuator




**9750 N** The strong interlocking system guarantees a maximum actuator holding force of  $F_{1max} = 9750 \text{ N}$ . This is one of the highest values currently available on the market today, making this device suitable for heavy-duty applications.

## Dustproof



The switch is provided with a through hole for inserting the actuator. Thanks to this unique feature, any dust that enters the actuator hole can always come out on the opposite side instead of remaining inside. Moreover, the lock pin is provided with a diaphragm seal, making the system suitable for critical environments with a high level of dust.


## Integrated control devices



The switch is also available with elevated cover. Control devices such as buttons, emergency stop buttons, indicator lights or selectors can thereby be attached directly to the switch together with corresponding contact blocks.

The result is a compact solution with direct access to control devices without needing to install them separately on the switch panel or in their own housing. The devices can be illuminated and, thanks to the PUSH-IN spring-operated connections, wiring is quick and intuitive.

## Centring

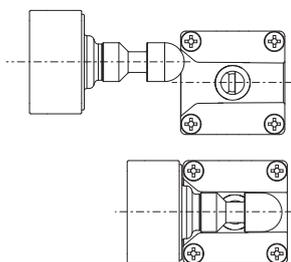

The switch is provided with a wide centring inlet for the actuator pin. This solution makes it easier to align the actuator and the opening hole on the head during installation. Moreover, this solution drastically reduces the probability of a collision between the switch and the actuator, making it possible to install the device even on inaccurately closing doors.

## Push-in spring-operated connections



The switch is provided with a PUSH-IN type spring-operated connection system on the inside. This technology allows wiring to be performed quickly and easily, as the wire just needs to be inserted into the appropriate hole in order to establish the electrical connection and automatically secure the wire. This operation can be performed with rigid or flexible wires with a crimped wire-end sleeve and requires no tools. Release is obtained by pressing the appropriate wire-releasing button.




### Six LEDs for immediate diagnosis



As the LEDs have been designed for quick immediate diagnosis, the status of each input and output is highlighted by one specific LED. This makes it possible to quickly identify the interruption points in the safety chain, which device is released, which door is opened and any errors inside the device. All of this at a glance, without needing to decode complex flashing sequences.

### Holding force of the unlocked actuator




The inside of each switch features a device which holds the actuator in its closed position. Ideal for all those applications where several guards are unlocked simultaneously, but only one is actually opened. The device keeps all the unlocked guards in their position with a retaining force of approx. 30 N, stopping any vibrations or gusts of wind from opening them.

### Function for protecting against recoil forces



If a guard is closed too quickly or with so much force that the recoil would cause it to open again, a special function in the NG switch prevents locking. This function prevents the immediate locking of the guard if the lock signal is applied. This protects the switch against recoil forces that occur during instantaneous locking. This serves to protect the switch from damage and forces the operator to close the guard more gently.

### Key release device and escape release button



The key release device (auxiliary release) is used to permit unlocking of the actuator only by personnel in possession of the key. The device also functions with no power supply and, once actuated, prevents the guard from being locked.

The escape release button allows actuator release and immediate opening of the guard. Generally used in machines

within which an operator could inadvertently become trapped, it faces towards the machine interior, to allow the operator to exit even in the event of a power failure. The button has two stable states and can be freely extended in length with suitable extensions (see accessories). Both devices can be positioned on the four sides of the switch. As a result, it can be installed both towards the interior and towards the exterior of the machine.

### Three safety output actuation modes


**MODE 1**  
**MODE 2**  
**MODE 3**

The device is available with 3 different actuation modes for safety outputs:

- mode 1: safety outputs active with inserted and locked actuator, for machines with inertia;
- mode 2: safety outputs active with inserted actuator, for machines without inertia;
- mode 3: a first safety output active with actuator inserted and locked and a second safety output active with actuator inserted, for special applications.


actuator inserted and locked and a second safety output active with actuator inserted, for special applications.

### Protection against tampering




Each actuator of the NG series is supplied with four snap-on protection caps. Not only do the caps prevent dirt from accumulating and simplify cleaning, they also block access to the fastening screws of the actuator. As a result, standard screws can be used instead of tamper-proof screws.

### Jointed actuator for inaccurately closing guards



All NG series actuators are articulated, thereby allowing the actuator pin to be safely guided into the switch through the centring hole. As a result, the actuator and switch do not need to be precisely aligned during installation. In addition, the device can thereby be used on guards with a minimum actuation radius of 150 mm without the actuation pin needing to be angled.


### Head and devices with variable orientation

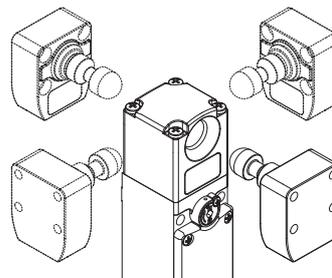

The system can be variably configured by loosening the 4 screws on the head.

The key release device and the escape release button can also be rotated and secured independently of one another in steps of 90°. The device can thus assume 16 different configurations.

### Non-detachable head and release devices



The head and the release device can be rotated but cannot be detached from each other. This makes the switch more secure since the problem of incorrect assembly by the installer cannot occur; in addition, the risk of damage is lower (loss of small parts, penetration of dirt, etc.).

### High protection degree

**IP69K**  
**IP67**


These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing. Due to their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

### External device monitoring


**EDM**

On request, the switch can be supplied with EDM function (External Device Monitoring). In this case, the switch itself checks the proper function of the devices connected to the safety outputs. These devices (usually relays or safety contactors) must send a feedback signal to the EDM input, which checks that the received signal is consistent with the state of the safety outputs.


## Selection diagram

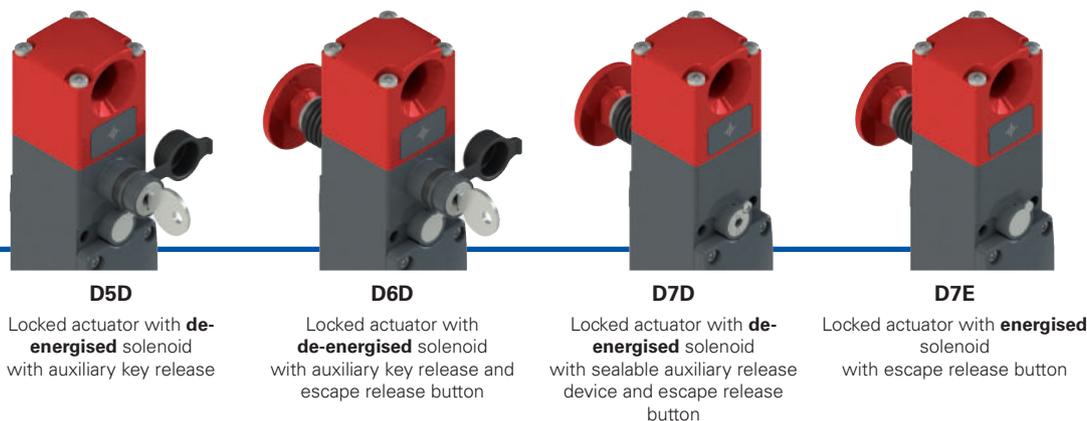

## HEAD TYPE AND OPERATING PRINCIPLE

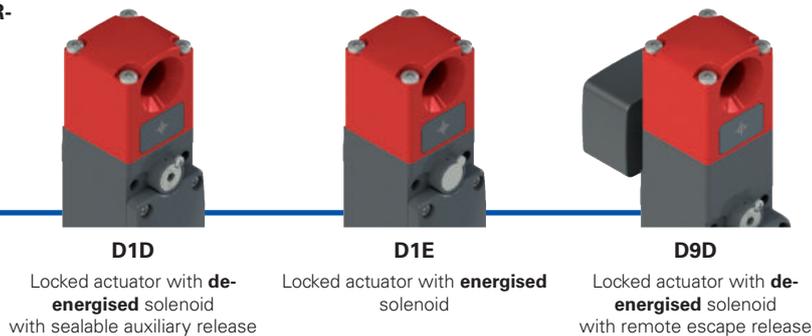


## ACTUATORS

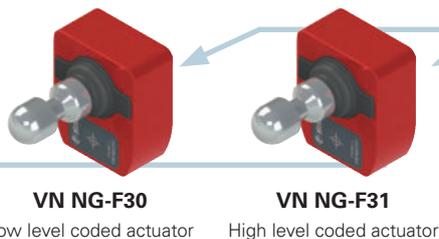

## SAFETY HANDLE



## COVER CONFIGURATIONS

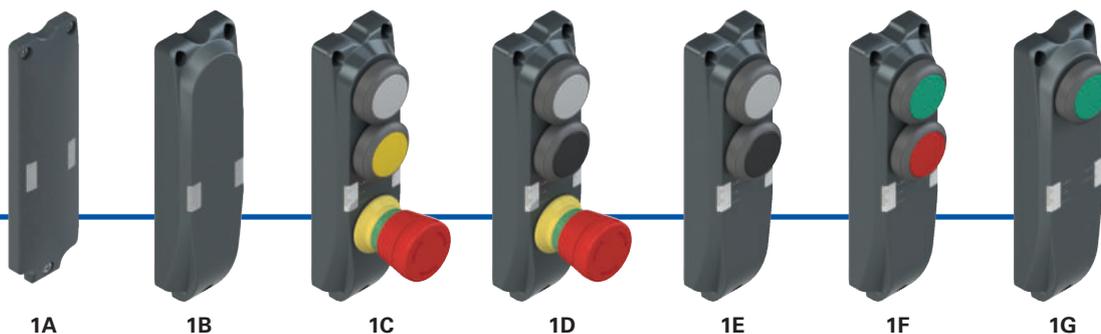

## CONDUIT ENTRIES



Threaded conduit entry M20

With M12 metal connector

With M12 metal connector for stand-alone connection

With M12 metal connector for series connection with "Y" connectors

With M23 metal connector (clockwise numbering)

With M23 metal connector (clockwise numbering)

<b>K110</b>	12-pole, bottom
<b>K111</b>	12-pole, right
<b>K112</b>	12-pole, left

<b>K953</b>	8-pole, bottom
<b>K954</b>	8-pole, right
<b>K955</b>	8-pole, left

<b>K950</b>	8-pole, bottom
<b>K951</b>	8-pole, right
<b>K952</b>	8-pole, left

<b>K900</b>	12-pole, bottom
<b>K901</b>	12-pole, right
<b>K902</b>	12-pole, left

<b>K601</b>	19-pole, bottom, configuration 1
<b>K602</b>	19-pole, bottom, configuration 2

... ..

Product options

Sold separately as accessory

**Code structure****Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article
options

**NG 2D1D411A-F31E34K900LP30**

Operating principle	
<b>D1D</b>	locked actuator with de-energised solenoid. With sealable auxiliary release device.
<b>D1E</b>	locked actuator with energised solenoid
<b>D5D</b>	locked actuator with de-energised solenoid. With auxiliary key release.
<b>D6D</b>	locked actuator with de-energised solenoid. With auxiliary key release and escape release button.
<b>D7D</b>	locked actuator with de-energised solenoid. With sealable auxiliary release device and escape release button.
<b>D7E</b>	locked actuator with energised solenoid. With escape release button.
<b>D9D</b>	locked actuator with de-energised solenoid. With remote escape release. <sup>(1)</sup>

(1) For the remote escape release, see page 203.

Inputs and outputs	
<b>3</b>	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: actuator inserted 1 signalling output O4: actuator locked I4 or IE1/IE2 inputs for solenoid activation 1 reset input I3 <b>Note:</b> Supplied only together with actuator.
<b>4</b>	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: actuator inserted 1 signalling output O4: actuator locked I4 or IE1/IE2 inputs for solenoid activation 1 input I3: actuator programming / reset
<b>5</b>	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: actuator inserted 1 signalling output O4: actuator locked I4 or IE1/IE2 inputs for solenoid activation 1 input I3: actuator programming / reset 1 feedback input EDM I5
<b>6</b>	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: actuator inserted 1 signalling output FAULT O4 I4 or IE1/IE2 inputs for solenoid activation 1 input I3: actuator programming / reset
<b>7</b>	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 inverted signalling output O3: actuator inserted 1 inverted signalling output O4: actuator locked I4 or IE1/IE2 inputs for solenoid activation 1 input I3: actuator programming / reset

Activation of OS outputs	
<b>1</b>	mode 1: safety outputs OS1 and OS2 active with inserted and locked actuator
<b>2</b>	mode 2: safety outputs OS1 and OS2 active with inserted actuator
<b>3</b>	mode 3: safety output OS1 active with inserted and locked actuator, safety output OS2 active with inserted actuator

Release button length	
	for max. 15 mm wall thickness (standard)
<b>LP30</b>	for max. 30 mm wall thickness
<b>LP40</b>	for max. 40 mm wall thickness
<b>LP50</b>	for max. 50 mm wall thickness
<b>LP60</b>	for max. 60 mm wall thickness
...	other wall thicknesses on request

Pre-installed connectors	
	without connector (standard)
<b>K110</b>	M12 metal connector, 12-pole, bottom
<b>K601</b>	M23 metal connector, 19-pole, bottom, configuration 1
<b>K900</b>	M23 metal connector, 12-pole, bottom
<b>K950</b>	M12 metal connector, 8-pole, bottom, for series connection
...	other connectors on request

For the complete list of possible combinations please contact our technical department.

Actuator extraction force	
	actuator extraction force 30 N (standard)
<b>E34</b>	actuator freely removable

Actuator	
<b>F30</b>	low level coded actuator VN NG-F30 the switch recognises any type F30 actuator
<b>F31</b>	high level coded actuator VN NG-F31 the switch recognises one single type F31 actuator

Cover configurations	
<b>1A</b>	low cover (standard)
<b>1B</b>	raised cover without holes
<b>1C</b>	cover with white button / yellow button / emergency stop button with rotary release
<b>1D</b>	cover with white button / black button / emergency stop button with rotary release
<b>1E</b>	cover with white button / black button
<b>1F</b>	cover with green button / red button
<b>1G</b>	cover with green button
...	other configurations on request

**Code structure for actuator****VN NG-F30**

Actuator	
<b>F30</b>	low level coded actuator the switch recognises any type F30 actuator
<b>F31</b>	high level coded actuator the switch recognises one single type F31 actuator



### Main features

- Actuation without contact, using RFID technology
- Digitally coded actuator
- Actuator holding force: 9750 N
- SIL 3 and PL e with a single device
- Metal housing, three M20 conduit entries
- Protection degree up to IP67 and IP69K
- PL e also with series connection of up to 32 devices
- Signalling LEDs

### Quality marks:



EC type examination certificate: M6A 075157 0023 Rev. 02  
 UL approval: E131787  
 TÜV SÜD approval: Z10 075157 0022 Rev. 02  
 EAC approval: RU C-IT.YT03.B.00035/19

### In compliance with standards:

EN ISO 14119, EN 60947-5-3, EN 60947-1, IEC 60204-1, EN 60204-1, EN ISO 12100, IEC 60529, EN 60529, EN 61000-6-2, EN 61000-6-3, BG-GS-ET-19, IEC 61508-1, IEC 61508-2, IEC 61508-3, IEC 61508-4, SN 29500, EN ISO 13849-1, EN ISO 13849-2, EN IEC 62061, EN 61326-1, EN 61326-3-1, EN 61326-3-2, EN IEC 63000, ETSI 301 489-1, ETSI 301 489-3, ETSI 300 330, UL 508, CSA C22.2 No. 14.

### Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EC, RED Directive 2014/53/EU, RoHS directive 2011/65/EU, FCC Part 15.

### Features approved by UL

Electrical Ratings: 24 Vdc, 0.25 A.  
 Input supplied by Class 2 source or limited voltage limited energy.  
 Environmental Ratings: Types 1, 4X, 12, 13 (versions without control devices), Type 1 (versions with control devices).

### Features approved by TÜV SÜD

Protection degree: IP67, IP69K  
 Ambient temperature: -20°C...+50°C  
 Storage temperature: -40°C...+75°C  
 PL, category: PL e, cat. 4  
 SIL: SIL 3 / SIL CL 3

Tested according to: 2006/42/EC, EN IEC 60947-5-2:2020/A11:2022, EN 60947-5-3:2013, EN 61508-1:2010 (SIL 3), EN 61508-2:2010 (SIL 3), EN 61508-3:2010 (SIL 3), EN IEC 62061:2021 (maximum SIL 3), EN ISO 13489-1:2015 (PL e, Cat 4).

Please contact our technical department for the list of approved products.

### Technical data

Metal head and housing, baked powder coating.  
 Three threaded conduit entries:  
 Protection degree:

M20x1.5  
 IP67 acc. to EN 60529,  
 IP69K acc. to ISO 20653  
 IP65 acc. to EN 60529 with cable gland of equal or higher protection degree

Protection degree with control devices:

### General data

Safety parameters	SIL	PL	Cat.	DC	PFH <sub>0</sub>	MTTF <sub>0</sub>
Monitoring function: actuator locked - Mode 1	3	e	4	High	1.15E-09	2968
Monitoring function: actuator present - Mode 2	3	e	4	High	1.15E-09	3946
Monitoring function: actuator locked - Mode 3	2	d	2	High	1.48E-09	2957
Monitoring function: actuator present - Mode 3	2	d	2	High	1.48E-09	3927
Dual-channel control for locking function of the actuator	3	e	4	High	1.51E-10	4011
Single-channel control for locking function of the actuator	2	d	2	High	1.51E-10	4011

Interlock with lock, no contact, coded: type 4 acc. to EN ISO 14119  
 Level of coding acc. to EN ISO 14119: low with F30 actuator  
 High with F31 actuator

Mission time: 20 years  
 Ambient temperature: -20°C ... +50°C

Max. actuation frequency with actuator lock and release: 600 operating cycles/hour  
 Mechanical endurance: 1 million operating cycles  
 Max. actuation speed: 0.5 m/s  
 Min. actuation speed: 1 mm/s  
 Maximum force before breakage  $F_{1max}$ : 9750 N acc. to EN ISO 14119  
 Max. holding force  $F_{2h}$ : 7500 N acc. to EN ISO 14119  
 Maximum clearance of locked actuator: 4 mm  
 Released actuator extraction force: ~ 30 N

### Power supply electrical data

Rated operating voltage  $U_0$ : 24 Vdc ±10% SELV/PELV  
 Operating current at  $U_0$  voltage: 40 mA min.; 0.4 A with activated solenoid;  
 1.2 A with activated solenoid and all outputs at maximum power

Rated insulation voltage  $U_i$ : 32 Vdc  
 Rated impulse withstand voltage  $U_{imp}$ : 1.5 kV  
 External protection fuse: 2 A type gG or equivalent device  
 Overvoltage category: III  
 Solenoid duty cycle: 100% ED (continuous operation)  
 Solenoid consumption: 9 W max.  
 Pollution degree: 3 acc. to EN 60947-1

### Electrical data of IS1/IS2/I3/I4/I5/IE1/IE2/EDM inputs

Rated operating voltage  $U_{01}$ : 24 Vdc  
 Rated current consumption  $I_{01}$ : 5 mA

### Electrical data of OS1/OS2 safety outputs

Rated operating voltage  $U_{02}$ : 24 Vdc  
 Output type: PNP type OSSD  
 Maximum current per output  $I_{02}$ : 0.25 A  
 Minimum current per output  $I_{m2}$ : 0.5 mA  
 Thermal current  $I_{m2}$ : 0.25 A  
 Utilization category: DC13;  $U_{02}=24$  Vdc,  $I_{02}=0.25$  A  
 Short circuit detection: Yes  
 Overcurrent protection: Yes  
 Internal self-resettable protection fuse: 1.1 A  
 Duration of the deactivation impulses at the safety outputs: < 300 μs  
 Permissible maximum capacitance between outputs: < 200 nF  
 Permissible maximum capacitance between output and ground: < 200 nF  
 Activation time of safety outputs OS1 and OS2 after deactivation of inputs IS1, IS2: typically 7 ms, max. 15 ms  
 Activation time upon unlocking the guard: typically 7 ms, max. 12 ms  
 Maximum delay of EDM status change: 500 ms

### Electrical data of O3/O4 signalling output

Rated operating voltage  $U_{03}$ : 24 Vdc  
 Output type: PNP  
 Maximum current per output  $I_{03}$ : 0.1 A  
 Utilization category: DC13;  $U_{03}=24$  Vdc,  $I_{03}=0.1$  A  
 Short circuit detection: No  
 Overcurrent protection: Yes  
 Internal self-resettable protection fuse: 1.1 A

### RFID sensor data


Assured operating distance  $S_{ao}$ : 2 mm  
 Assured release distance  $S_{ar}$ : 4 mm (actuator not locked)  
 10 mm (actuator locked)  
 Rated operating distance  $S_n$ : 2.5 mm  
 Repeat accuracy: ≤ 10 %  $s_n$   
 Differential travel: ≤ 20 %  $s_n$   
 RFID transponder frequency: 125 kHz  
 Max. switching frequency: 1 Hz



## Actuation mode of the OS1 and OS2 safety outputs


Mode 1	Mode 2	Mode 3
Safety outputs OS1 and OS2 are active when the actuator is inserted and locked.	Safety outputs OS1 and OS2 are active when the actuator is inserted.	Safety output OS1 is active when the actuator is inserted and locked and IS1 is active. Safety output OS2 is active when the actuator is inserted and IS2 is active.
In case of machines with or without inertia of the dangerous elements. Safety category of the safety outputs: PL e, SIL 3.	In case of machines without inertia of the dangerous elements. Safety category of the safety outputs: PL e, SIL 3.	In case of machines with or without inertia of the dangerous elements. Safety category of the safety outputs: PL d, SIL 2.

## Selection table for switches with high level coded actuators

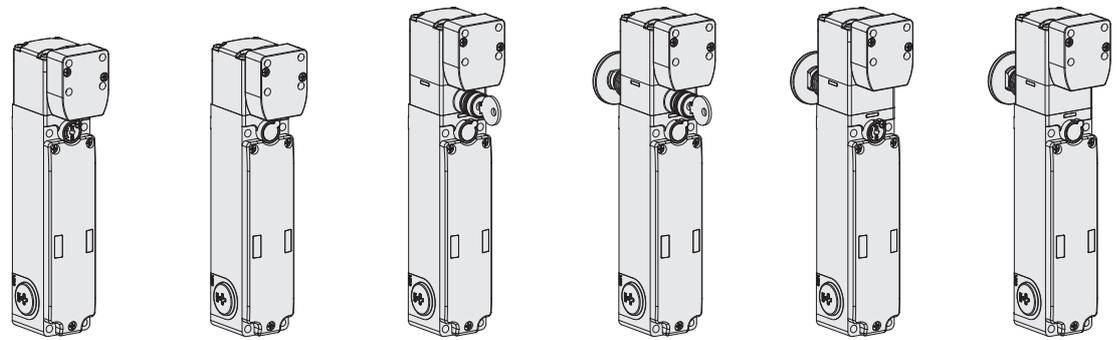

Operating principle	Locked actuator with de-energised solenoid. With sealable auxiliary release device.	Locked actuator with energised solenoid.	Locked actuator with de-energised solenoid. With key release.	Locked actuator with de-energised solenoid. With key release and escape release button.	Locked actuator with de-energised solenoid. With escape release button and sealable auxiliary release device.	Locked actuator with energised solenoid. With escape release button.
Mode 1	NG 2D1D411A-F31	NG 2D1E411A-F31	NG 2D5D411A-F31	NG 2D6D411A-F31	NG 2D7D411A-F31	NG 2D7E411A-F31
Mode 2	NG 2D1D421A-F31	NG 2D1E421A-F31	NG 2D5D421A-F31	NG 2D6D421A-F31	NG 2D7D421A-F31	NG 2D7E421A-F31
Mode 3	NG 2D1D431A-F31	NG 2D1E431A-F31	NG 2D5D431A-F31	NG 2D6D431A-F31	NG 2D7D431A-F31	NG 2D7E431A-F31

## Selection table for switches

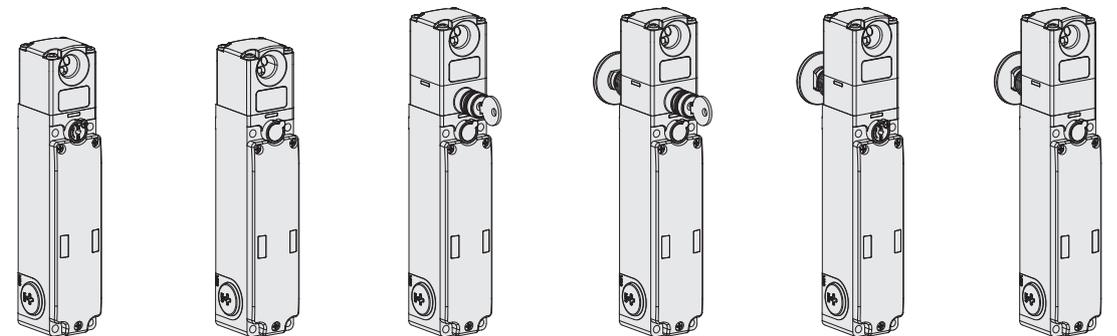


Operating principle	Locked actuator with de-energised solenoid. With sealable auxiliary release device.	Locked actuator with energised solenoid.	Locked actuator with de-energised solenoid. With key release.	Locked actuator with de-energised solenoid. With key release and escape release button.	Locked actuator with de-energised solenoid. With escape release button and sealable auxiliary release device.	Locked actuator with energised solenoid. With escape release button.
Mode 1	NG 2D1D411A	NG 2D1E411A	NG 2D5D411A	NG 2D6D411A	NG 2D7D411A	NG 2D7E411A
Mode 2	NG 2D1D421A	NG 2D1E421A	NG 2D5D421A	NG 2D6D421A	NG 2D7D421A	NG 2D7E421A
Mode 3	NG 2D1D431A	NG 2D1E431A	NG 2D5D431A	NG 2D6D431A	NG 2D7D431A	NG 2D7E431A

To order a product with EDM input replace number 4 with number 5 in the codes shown above. Example: NG 2D1D411A → NG 2D1D511A

Legend: interlock with lock monitoring acc. to EN ISO 14119

## Selection table for actuators




Level of coding acc. to EN ISO 14119	Article
low	VN NG-F30
high	VN NG-F31

The use of RFID technology in NG series devices makes them suitable for several applications. Pizzato Elettrica offers two different versions of actuators, in order to best suit customers' specific needs. Type F30 actuators are all encoded with the same code. This implies that a device associated with an actuator type F30 can be activated by other actuators type F30. Type F31 actuators are always encoded with different codes. This implies that a device associated with an actuator type F31 can be activated only by a specific actuator. Another F31 type actuator will not be recognised by the device until a new association procedure is carried out (reprogramming). After reprogramming, the old actuator F31 will no longer be recognized. Reprogramming of the actuator can be performed repeatedly.

## Complete safety system


The use of complete and tested solutions guarantees the electrical compatibility between the NG series switches and the safety modules from Pizzato Elettrica, as well as high reliability. The switches have been tested with the modules listed in the adjacent table.

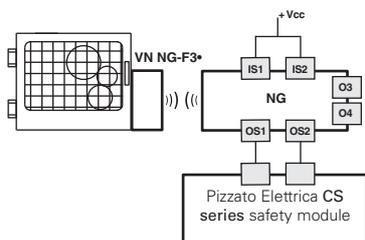


NG series switches can be used as individual devices provided that the safety outputs be evaluated by a Pizzato Elettrica safety module (see table for combinable safety modules).

Switches	Compatible safety modules	Safety module output contacts		
		Instantaneous safety contacts	Delayed safety contacts	Signalling contacts
NG 2●●●●●●	CS AR-01●●●●●	2NO	/	1NC
	CS AR-02●●●●●	3NO	/	/
	CS AR-05●●●●●	3NO	/	1NC
	CS AR-06●●●●●	3NO	/	1NC
	CS AR-08●●●●●	2NO	/	/
	CS AT-0●●●●●	2NO	2NO	1NC
	CS AT-1●●●●●	3NO	2NO	/
	CS MP●●●●●		See p. 369	
	CS MF●●●●●		See p. 401	

All NG series switches can be connected to safety modules or safety PLCs with OSSD inputs provided compatibility is ensured in advance.

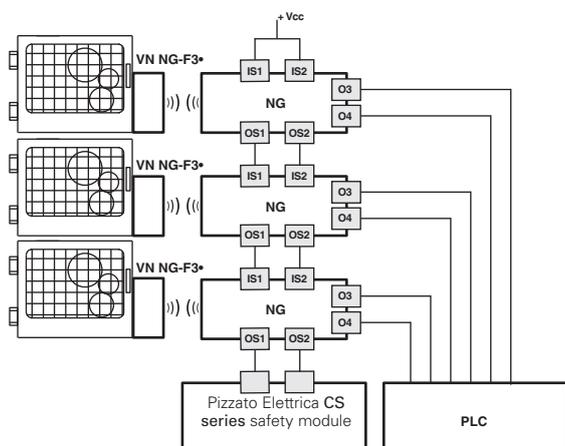


Possibility of series connection of multiple switches for simplifying the wiring of the safety system, whereby only the outputs of the last switch are evaluated by a Pizzato Elettrica safety module (see table with compatible safety modules). Each NG series switch is provided with two signalling outputs which are activated when the guard is closed (O3) or locked (O4). Depending on the specific requirements of the system that has been realised, the signals of the signalling outputs can be evaluated by a PLC.

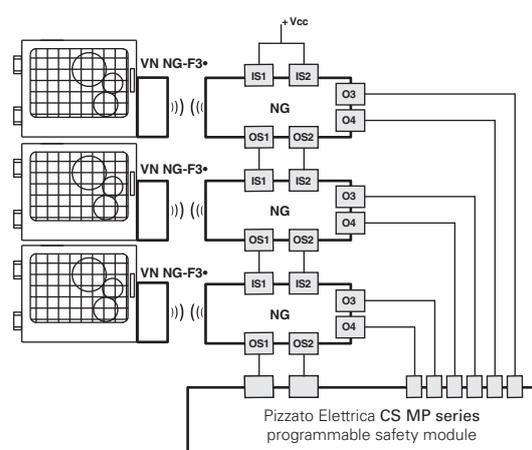

Possibility of series connection of multiple switches for simplifying the wiring of the safety system, whereby only the outputs of the last switch are evaluated by a Pizzato Elettrica safety module of the CS MP series. Both the safety-relevant evaluation and the evaluation of the signalling outputs are performed by the CS MP series. The examples listed above refer to applications with NG 2●●●●●●.

## Internal wiring diagram

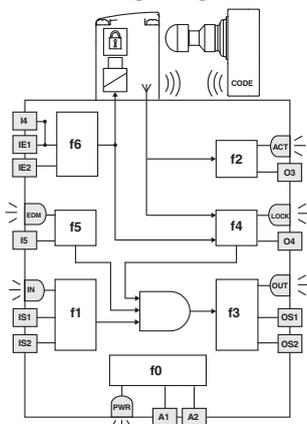

LED	Function
PWR	Power supply / self-diagnosis
IN	status of safety inputs
OUT	status of safety outputs
ACT	actuator state
LOCK	actuator locked
EDM	state of EDM input (NG 2D●●5●●)

The diagram on the side represents the 6 logic functions which interact inside the device.

Function f0 is a basic function and includes the monitoring of the power supply as well as internal, cyclical tests.

Function f1 monitors the status of the device inputs, whereas function f2 monitors the presence of the actuator within the detection areas of the switch.

Function f4 checks the actuator lock condition.

Function f3 is intended to activate or deactivate the safety outputs and check for any faults or short circuits in the outputs.

In the EDM versions, the f5 function verifies the consistency of the EDM signal during safety output state changes.


The safety-related function, which combines the sub-functions mentioned above, activates the safety outputs according to the chosen operating mode:

- Both safety outputs OS1/OS2 for switches in mode 1 are activated only if both IS1/IS2 safety inputs are active and the actuator is inserted and locked;
- Both safety outputs OS1/OS2 for switches in mode 2 are activated only if both IS1/IS2 safety inputs are active and the actuator is inserted;
- The safety output OS1 for switches in mode 3 is activated only if the IS1 safety input is active and the actuator is inserted and locked, whereas the safety output OS2 is activated only if the IS2 safety input is active and the actuator is inserted.

The status of each function is displayed by the corresponding LED (PWR, IN, OUT, ACT, LOCK, EDM), in such a way that the general device status becomes immediately obvious to the operator.



### Actuation sequence in mode 1

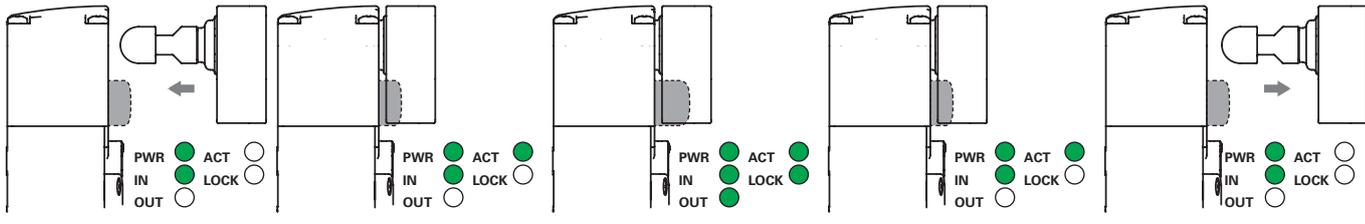

The switch is supplied with power (PWR LED on, green), the IS1 and IS2 inputs are enabled (IN LED on, green), the OS1 and OS2 safety outputs are disabled (OUT LED off). The actuator is outside of the actuation zone (LED ACT off).

When the actuator is brought inside the safe actuation area (dark grey area), the switch turns on the ACT LED (green). In this position, the O3 signalling output (door-closed) is activated. The actuator is not locked (LOCK LED off).

The I4 input can be used to lock the actuator (LOCK LED on, green). The OS1 and OS2 safety outputs are enabled (OUT LED on, green). The O4 signalling output is activated at the same time. The safe actuation area is extended in order to allow greater play for the actuator.

The I4 input can be used to unlock the actuator (LOCK LED off). The switch disables the OS1 and OS2 safety outputs and turns off the OUT LED. The O4 signalling output is deactivated at the same time. The safe actuation area returns to the initial values.

When the actuator leaves the actuation limit area, the device turns off the ACT LED and the O3 signalling output.

### Actuation sequence in mode 2 and mode 3


In contrast to the above mode 2 description, the safety outputs OS1 and OS2 are activated when the actuator is detected, and deactivated when the actuator is no longer detectable, in mode 3, the OS1 safety output is active with inserted and locked actuator and IS1 active, the OS2 safety output is active with inserted actuator and IS2 active.

#### Operating states


PWR LED	IN LED	OUT LED	ACT LED	LOCK LED	EDM LED (a)	Device state	Description
○	○	○	○	○	○	OFF	Device switched off.
●	●	●	●	●	●	POWER ON	Internal tests upon activation.
●	○	○	*	*	●	RUN	Safety inputs of the device not active.
●	●	*	*	*	*	RUN	Activation of safety inputs.
●	●	○	*	*	*	RUN	Safety inputs incoherence. Recommended action: check for presence and/or wiring of inputs.
●	*	*	●	*	*	RUN	Actuator in safe area. O3 signalling output active.
●	*	*	●	●	○	RUN	Actuator in safe area and locked; O3 and O4 outputs active.
●	●	●	●	●	○	RUN	<b>Mode 1</b> Activation of safety inputs IS1, IS2. Actuator in safe area and locked. O3, O4, OS1 and OS2 outputs active.
●	●	●	●	*	○	RUN	<b>Mode 2</b> Activation of safety inputs IS1, IS2. Actuator in safe area. O3, OS1 and OS2 outputs active.
●	●	●	●	●	○	RUN	<b>Mode 3</b> Actuator present, guard closed and locked, IS1 enabled, IS2 disabled, OS1 enabled, OS2 disabled.
●	●	●	●	○	○	RUN	<b>Mode 3</b> Actuator present, guard closed and not locked, IS1 and IS2 enabled, OS1 disabled, OS2 enabled.
●	*	●	*	*	*	ERROR	Error on safety outputs. Recommended action: check for any short circuits between the outputs, outputs and ground or outputs and power supply, then restart the device.
●	○	○	●	○	○	ERROR	Actuator detection error. Check the physical integrity of the device and, in case of failure, please replace the entire device. If undamaged, realign the actuator with the switch and restart the device.
●	○	○	○	○	○	ERROR	Internal error. Recommended action: restart the device. If the failure persists, replace the device.
●	*	○	*	*	●	RUN	EDM signal active (external relay off) <sup>a</sup>
●	●	●	●	●	○	RUN	EDM signal not active (external relay on) <sup>a</sup>
●	○	○	○	○	●	ERROR	Error in the EDM <sup>a</sup> function

Legend: ○ = off ● = on ● = flashing ● = alternating colours \* = indifferent  
(a) Available for NG 2D●●5●● versions only

#### External device monitoring (EDM)

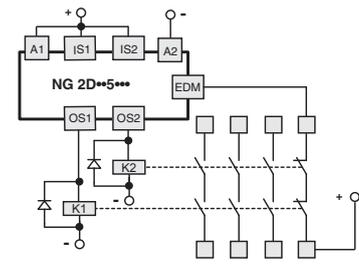

The NG 2D●●5●● version, in addition to maintaining the operating and safety characteristics of the NG series, allows control of **forcibly guided NC contacts of contactors or relays** controlled by the safety outputs of the switch itself. As an alternative to the relays or contactors you can use Pizzato Elettrica expansion modules CS ME-03. See page 359 of the General Catalogue Safety 2023-2024. This check is carried out via the EDM input (External Device Monitoring as defined in EN 61496-1) of the switch.

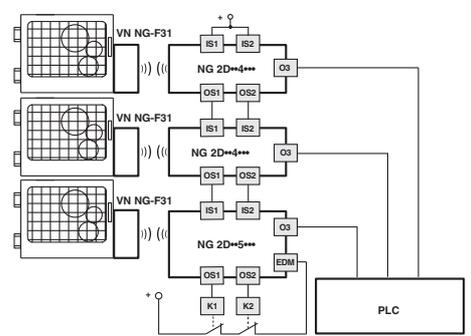


This version, with the IS safety inputs, **can be used at the end of a series of NG switches, up to a maximum number of 32 devices**, while maintaining the maximum PL e safety level and acc. to EN ISO 13849-1 and SIL 3 safety level acc. to EN IEC 62061.

This solution allows you to dispense with the safety module connected to the last device in the chain.

## Connection with safety modules


Connections with CS AR-08•••• safety modules

Input configuration with monitored start  
2 channels / Category 4 / up to SIL 3 / PL e

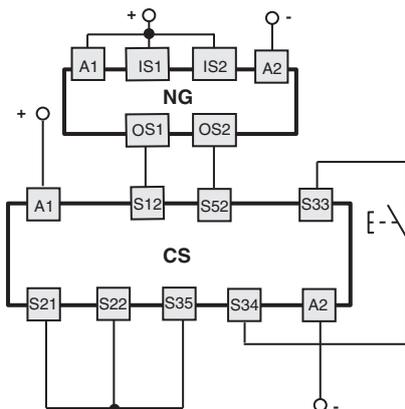


Connections with CS AR-05•••• / CS AR-06•••• safety modules

Input configuration with manual start (CS AR-05••••)  
or monitored start (CS AR-06••••)  
2 channels / Category 4 / up to SIL 3 / PL e

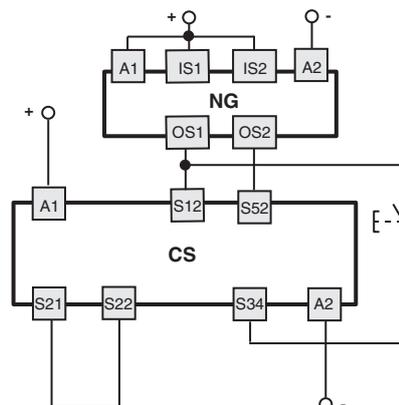


Connections with CS AT-0••••• / CS AT-1••••• safety modules

Input configuration with monitored start  
2 channels / Category 4 / up to SIL 3 / PL e

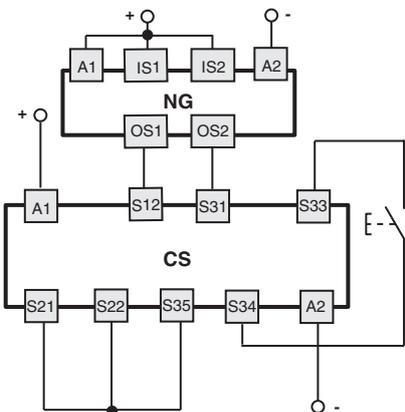

Connections with CS MF•••••, CS MP••••• safety modules

The connections vary according to the program of the module  
Category 4 / up to SIL 3 / PL e

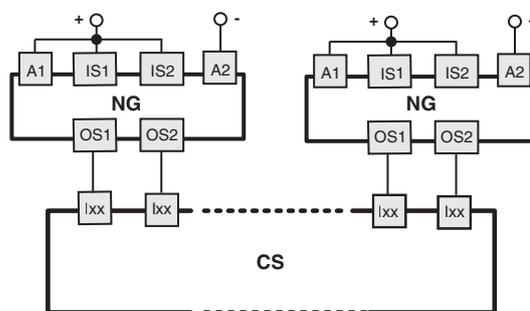


Application example on page 367

## Series connection of several switches


Monitoring function: actuator locked  
2 channels / Category 4 / up to SIL 3 / PL e

Single-channel control for locking function of the actuator  
1 channel / Category 2 / up to SIL 2 / PL d

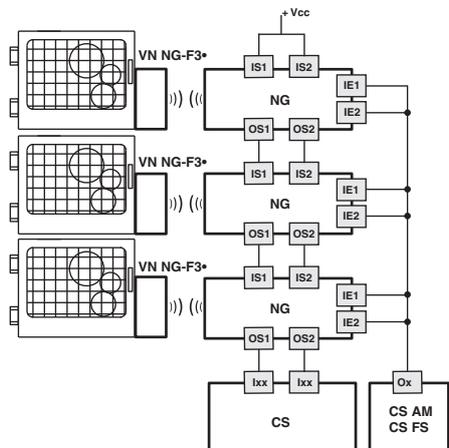

Monitoring function: actuator locked  
2 channels / Category 4 / up to SIL 3 / PL e

Dual-channel control for locking function of the actuator  
2 channels / Category 4 / up to SIL 3 / PL e

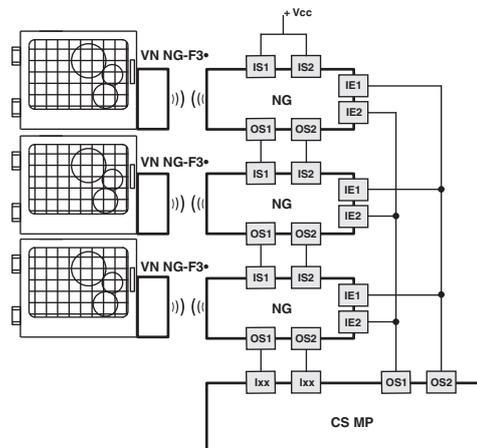

## Connection terminals

PUSH-IN type spring-operated connection system

Cross-section of rigid/flexible wires w. wire-end sleeve:

min. 1 x 0.34 mm<sup>2</sup> (1 x AWG 22)  
max. 1 x 1.5 mm<sup>2</sup> (1 x AWG 16)

Wire cross-section with pre-insulated wire-end sleeve:

min. 1 x 0.25 mm<sup>2</sup> (1 x AWG 23)  
max. 1 x 0.75 mm<sup>2</sup> (1 x AWG 18)

Cable stripping length (x):







min.: 8 mm  
max.: 12 mm





### Pin assignments (version with standard cover NG 2D••••1A)

Internal terminal strip	M23 connector 12-pole	M12 connector 12-pole	M12 connector 8-pole stand-alone connection	M12 connector 8-pole series connection with "Y" connectors	Connection
A2 1	3	3	3	3	<b>A2</b> Supply input 0 V
B2 2	3	3	3	3	<b>B2</b> 0 V auxiliary supply output
I4 3	10	10	8	8	<b>I4</b> Solenoid activation input for single channel mode (c)
O4 4	5	5	2	/	<b>O3</b> Signalling output, actuator inserted and locked (e)
O4 5	9	9	5	5 (f)	<b>O4</b> Signalling output, actuator inserted and locked (b) (e)
I3 6	8	8	6	/	<b>I3</b> Actuator programming input / reset
IE1 8	10	10	/	/	<b>IE1</b> Solenoid activation input for double channel mode
IE2 9	12 (d)	12 (d)	/	/	<b>IE2</b> Solenoid activation input for double channel mode
A1 10	1	1	1	1	<b>A1</b> Supply input +24 Vdc
B1 11	1	1	1	1	<b>B1</b> Auxiliary supply output +24 Vdc, 8 A max.
IS1 12	1	1	/	/	<b>IS1</b> Safety input
IS2 13	2	2	/	2	<b>IS2</b> Safety input
I5 14	6	6	/	6	<b>IS2</b> Safety input
OS1 15	11	11	/	/	<b>I5</b> EDM input (a)
OS2 16	4	4	4	4	<b>OS1</b> Safety output
	7	7	7	7	<b>OS2</b> Safety output

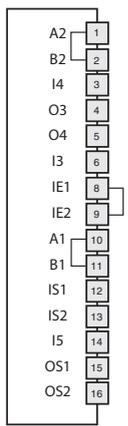

**Important:** terminals 7, 17, 18, of the internal terminal strip must not be used.

(a) Available in NG 2D•••5••• version only.  
 (b) For NG 2D•••6•••: the output signals the fault condition of the device.  
 (c) In single-channel actuation mode, inputs IE1 and IE2 must be short-circuited.  
 (d) In dual channel actuation mode, remove the internal bridge between terminals 8-9 and connect the wire from pin 12 to internal terminal 9.  
 (e) For NG 2D•••7••• articles: the signalling outputs O3 and O4 have negative operating logic (low active signal).  
 (f) Available for 8-pole connector, not available for the end of a chain with Y connectors.

Female connectors See page 419

## Switch with integrated field-wireable control devices

Image	NG 2D••••1C			NG 2D••••1D			NG 2D••••2V		
	Description	Colour	Terminals	Description	Colour	Terminals	Description	Colour	Terminals
	Device 1	illuminated button, spring-return 1NO+1NC	white	illuminated button, spring-return 1NO+1NC	white	19 21 31	illuminated button, spring-return 1NO+1NC	white	19 21 31
	Device 2	illuminated button, spring-return 1NO+1NC	yellow	button, not illuminated, spring-return 1NO+1NC	black	20 22 34	illuminated button, spring-return 1NO+1NC	blue	20 22 34
	Device 3	emergency stop button, not illuminated, with rotary release 2NC	red	emergency stop button, not illuminated, with rotary release 2NC	red	23 25 32	emergency stop button, not illuminated, with rotary release 2NC	red	23 25 32
	NG 2D••••1E			NG 2D••••1F			NG 2D••••7F		
	Device 1	illuminated button, spring-return 1NO+1NC	white	illuminated button, spring-return 1NO+1NC	green	19 21 31	illuminated button, spring-return 1NO+1NC	white	19 21 31
	Device 2	button, not illuminated, spring-return 1NO+1NC	black	illuminated button, spring-return 1NO+1NC	red	20 22 34	illuminated button, spring-return 1NO+1NC	blue	20 22 34
	NG 2D••••1G			NG 2D••••1H			NG 2D••••3G		
	Device 1	illuminated button, spring-return 1NO+1NC	green	illuminated button, spring-return 1NO+1NC	white	19 21 31	illuminated button, spring-return 1NO+1NC	blue	19 21 31

## Internal connections (version with integrated control devices)


Terminal no.	Connection	NG 2D••••1C NG 2D••••1D NG 2D••••2V	NG 2D••••1E NG 2D••••1F NG 2D••••7F	NG 2D••••1G NG 2D••••1H NG 2D••••3G
1	A2 Supply input 0 V	1	1	1
2	B2 0 V auxiliary supply output	2	2	2
3	I4 Solenoid activation input for single channel mode (c)	3	3	3
4	O3 Signalling output, actuator inserted (d)	4	4	4
5	O4 Signalling output, actuator inserted and locked (b) (d)	5	5	5
6	I3 Actuator programming input / reset	6	6	6
8	IE1 Solenoid activation input for double channel mode	8	8	8
9	IE2 Solenoid activation input for double channel mode	9	9	9
10	A1 Supply input +24 Vdc	10	10	10
11	B1 Auxiliary supply output +24 Vdc, 1.5 A max.	11	11	11
12	IS1 Safety input	12	12	12
13	IS2 Safety input	13	13	13
14	I5 EDM input (a)	14	14	14
15	OS1 Safety output	15	15	15
16	OS2 Safety output	16	16	16

**Important:** terminals 7, 17, 18, of the internal terminal strip must not be used.  
 (a) Available in NG 2D••••5••• version only.  
 (b) For NG 2D••••6•••: the output signals the fault condition of the device.  
 (c) In single-channel actuation mode, inputs IE1 and IE2 must be short-circuited.  
 (d) For NG 2D••••7••• articles: the signalling outputs O3 and O4 have negative operating logic (low active signal).

Terminal no.	Connection	Image
19	Contact 1	
20	Contact 2	
21	Contact 1	
22	Contact 2	
23	Contact 1	
24	Contact 2	
25	Contact 1	
26	Contact 2	
27	Contact 1	
28	Contact 2	
29	Contact 1	
30	Contact 2	
31	Supply input +24 Vdc / LED device 1	
32	Supply input +24 Vdc / LED device 2	
33	Supply input +24 Vdc / LED device 3	
34	Supply input 0 V / LED	




### Switch with integrated control devices and M23 connector, 19-pole

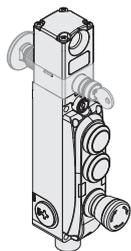

NG 2D••••1C-K603			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	white	17 18 6 19
Device 2	illuminated button, spring-return 1NO	yellow	15 16 6 19
Device 3	emergency stop button, not illuminated, with rotary release 2NC	red	10 13 11 14

NG 2D••••1D-K603			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	white	17 18 6 19
Device 2	button, not illuminated, spring-return 1NO	black	15 6
Device 3	emergency stop button, not illuminated, with rotary release 2NC	red	10 13 11 14


NG 2D••••2V-K603			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	white	17 18 6 19
Device 2	illuminated button, spring-return 1NO	blue	15 16 6 19
Device 3	emergency stop button, not illuminated, with rotary release 2NC	red	10 13 11 14

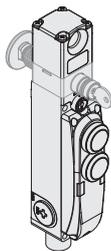

NG 2D••••1E-K602			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	white	17 18 6 19
Device 2	button, not illuminated, spring-return 1NO	black	15 6

NG 2D••••1F-K602			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	green	17 18 6 19
Device 2	illuminated button, spring-return 1NO	red	15 16 6 19

NG 2D••••7F-K602			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	white	17 18 6 19
Device 2	illuminated button, spring-return 1NO	blue	15 16 6 19

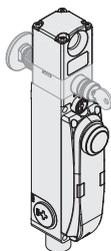


NG 2D••••1G-K601			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	green	17 18 6 19

NG 2D••••1H-K601			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	white	17 18 6 19

NG 2D••••3G-K601			
	Description	Colour	Terminals
Device 1	illuminated button, spring-return 1NO	blue	17 18 6 19

### Internal connections (version with integrated control devices)



M23 connector, 19-pole	Connection
19	A2 Supply input 0 V
19	B2 0 V auxiliary supply output
1	I4 Solenoid activation input for single channel mode
8	O3 Signalling output, actuator inserted (c)
9	O4 Signalling output, actuator inserted and locked (b) (c)
7	I3 Actuator programming input / reset
/	IE1 Solenoid activation input for double channel mode (d)
/	IE2 Solenoid activation input for double channel mode (d)
6	A1 Supply input +24 Vdc
6	B1 Auxiliary supply output +24 Vdc, 1.5 A max.
2	IS1 Safety input
3	IS2 Safety input
12	I5 EDM input (a)
4	OS1 Safety output
5	OS2 Safety output

**Important:** terminals 7, 17, 18, of the internal terminal strip must not be used.


(a) Available in NG 2D••••5 version only.

(b) For NG 2D••••6 version: the output signals the fault condition of the device.

(c) For NG 2D••••7 version: the signalling outputs O3 and O4 have negative operating logic (low active signal).

(d) Input not connected.

17	Contact 1	Device 1	
6	Contact 2		
/	Contact 1	Device 2	
15	Contact 2		
6	Contact 1	Device 3	
/	Contact 2		
10	Contact 1		
11	Contact 2		
13	Contact 1		
14	Contact 2		
18	Supply input +24 Vdc / LED device 1		
16	Supply input +24 Vdc / LED device 2		
/	Supply input +24 Vdc / LED device 3		
19	Supply input 0 V / LED		

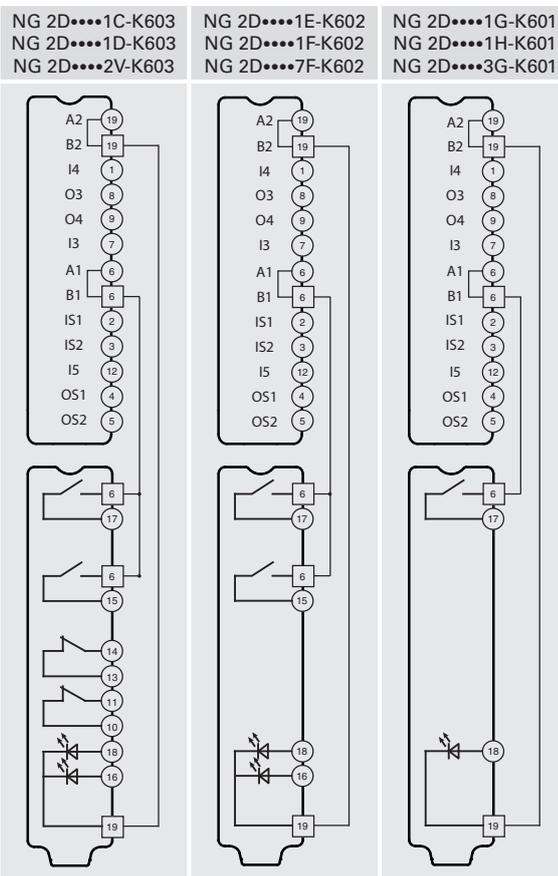


**Female connectors** see page 419





## Extensions for release button

Article	Description	Drawing
VN NG-LP30	Metal extension for release button. For max. wall thickness of 30 mm	
VN NG-LP40	Metal extension for release button. For max. wall thickness of 40 mm	
VN NG-LP50	Metal extension for release button. For max. wall thickness of 50 mm	
VN NG-LP60	Metal extension for release button. For max. wall thickness of 60 mm	
VN NG-ERB	Red metal release button	

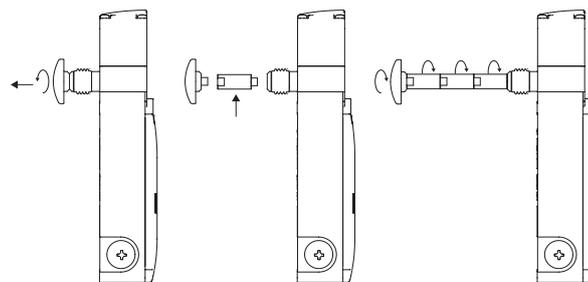

- Metal extensions can be combined with one another to achieve the desired length.
- Do not exceed an overall length of 500 mm between the release button and the switch.
- Use medium-strength thread locker to secure the extensions.

## Adhesive labels for escape release button



Polycarbonate yellow adhesive, rectangular, 300x32 mm, red inscription. It has to be fixed on the internal part of the jamb and helps finding the escape release button.

Article	Description
VF AP-A1AGR01	PREMERE PER USCIRE
VF AP-A1AGR02	PUSH TO EXIT
VF AP-A1AGR04	ZUM ÖFFNEN DRÜCKEN
VF AP-A1AGR05	POUSSER POUR SORTIR
VF AP-A1AGR06	PULSAR PARA SALIR
VF AP-A1AGR07	НАЖАТЬ ДЛЯ ВЫХОДА
VF AP-A1AGR08	NACISNAĆ ABY WYJŚĆ
VF AP-A1AGR09	PRESSIONAR PARA SAIR

## Accessories


Article	Description
VF KLB300	Set of two locking keys
	Extra copy of the locking keys to be purchased if further keys are needed (standard supply: 2 units). The keys of all switches have the same code. Other codes on request.
Article	Description
VN NG-ERX	AISI 316 stainless steel release button
	AISI 316 stainless steel release button, unpainted. Guarantees a high resistance against corrosion and aggressive cleaning.

## Series connection

To simplify series connections of the devices, various M12 connectors are available that allow complete wiring.

This solution significantly reduces installation times while at the same time maintaining the maximum safety levels PL e and SIL 3.

For more information see page 426 of the General Catalogue Safety 2023-2024.

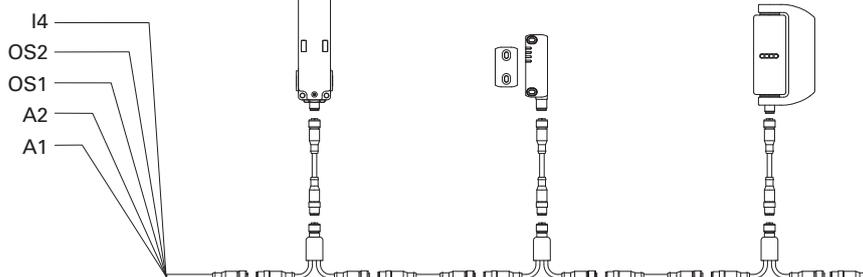

## Available control devices

	Description	Colour	Spare part number	Combinable with contacts <sup>(1)</sup>	Protrusion (x) mm
	Illuminated button, spring-return	<ul style="list-style-type: none"> <li>● White</li> <li>● Red</li> <li>● Green</li> <li>● Yellow</li> <li>● Blue</li> </ul>	VN NG-AC27121 VN NG-AC27123 VN NG-AC27124 VN NG-AC27125 VN NG-AC27126	1NO (1NC) (2NO) (1NO+1NC)	3
	Non-illuminated button, spring-return	● Black	VN NG-AC27122	1NO (1NC) (2NO) (1NO+1NC)	3
	Non-laser-markable, illuminated, projecting spring-return push button	● Red	VN NG-AC26018	1NO (1NC) (2NO) (1NO+1NC)	6,1
	Indicator light	<ul style="list-style-type: none"> <li>● Red</li> <li>● Yellow</li> <li>● Green</li> <li>● Blue</li> <li>● White</li> </ul>	VN NG-AC26060 VN NG-AC26061 VN NG-AC26062 VN NG-AC26063 VN NG-AC26064	/	2,7
	Emergency stop button acc. to EN ISO 13850			2NC	26,4
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Red</li> <li>● Red</li> </ul>	VN NG-AC26052 VN NG-AC26055		
	Emergency stop button acc. to EN ISO 13850 for 2NC + 1NO contacts, spring-return <sup>(2)</sup>			2NC + 1NO, spring-return	26,4
	Rotary release	● Red	VN NG-AC26056		
	Illuminated emergency stop button acc. to EN ISO 13850			2NC	26,4
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Red</li> <li>● Red</li> </ul>	VN NG-AC26051 VN NG-AC26054		
	Simple stop button			2NC	26,4
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Black</li> <li>● Black</li> </ul>	VN NG-AC26053 VN NG-AC26057		
	Illuminated selector switch with handle, with transparent lens for LED				
	↙	● Black	VN NG-AC26033	1NO 1NC (2NO) (1NO+1NC)	16,8
	↘	● Black	VN NG-AC26030		
	↙	● Black	VN NG-AC26034		
	↘	● Black	VN NG-AC26031		
	Key selector switch, 2 positions				
	↙	● Black	VN NG-AC26043	1NO (1NC) (2NO) (1NO+1NC)	39 (a) 14 (b)
	↘	● Black	VN NG-AC26040		
	↙	● Black	VN NG-AC26041		
	Closing cap	● Black	VN NG-AC26020	/	2,7
	Fixing key	● Black	VN NG-AC26080	/	/

**Legend:**  Maintained  Spring-return  Key extraction position (a) with key (b) without key

<sup>(1)</sup> The contacts in brackets are on request. Contact our technical department to verify the effective feasibility of the control device unit with the chosen combination of control devices.

<sup>(2)</sup> The NO contact with spring-return is only activated if the emergency stop button reaches the stop. The signal of the NO contact is captured by analysing the rising edge.

**To order buttons with marking:**

add the marking code indicated in the tables on pp. 165-168 to the article codes of the General Catalogue HMI 2023-2024.

Example: Black spring-return button with "O" engraving.

VN NG-AC27122 → VN NG-AC27122-L1



## Technical data of the control devices

### General data

Protection degree:	IP65 acc. to EN 60529
Mechanical endurance:	
Spring-return button:	1 million operating cycles
Emergency stop button:	50,000 operating cycles
Selector switch:	300,000 operating cycles
Key selector switch:	50,000 operating cycles
	30,000 operating cycles including removal of the key
Safety parameter $B_{10D}$ :	100,000 (emergency stop button)

### Actuating force

Spring-return button:	4 N min	100 N max.
Emergency stop button:	20 N min	100 N max.
Selector switch:	0.1 Nm min	1.5 Nm max.
Key selector switch:	0.1 Nm min	1.3 Nm max.

### Contact blocks of the control devices

Material of the contacts:	silver contacts
Contact type:	Self-cleaning contacts with double interruption

### Electrical data:

Thermal current $I_{th}$ :	1 A
Rated insulation voltage $U_i$ :	32 Vac/dc
Rated impulse withstand voltage $U_{imp}$ :	1.5 kV
LED supply voltage:	24 Vdc $\pm$ 15%
LED supply current:	10 mA per LED

### Utilization category of the contact block:

Direct current: DC13
$U_e$ (V) 24
$I_e$ (A) 0.55

### Signalling contact with spring return:

Direct current: DC13
$U_e$ (V) 24
$I_e$ (mA) 10

### In compliance with standards:

IEC 60947-5-1, IEC 60947-5-5, EN ISO 13850

### Installation for safety applications:


Always connect the safety circuit to the **NC contacts** (normally closed contacts) as stated in standard EN 60947-5-1.

## Description



These switches are used mainly on machines where the hazardous conditions persist even after the machine has been switched off. Mechanical parts such as pulleys, saw blades, etc., could continue to move after the machine is switched off. Thus, the switches can also be used if individual guards are only to be opened under certain conditions.

Versions with mode 1 and 3 (safety outputs active when guard closed and locked) are interlocks with guard locking acc. to ISO 14119; the product is labelled with the symbol shown.



## Maximum safety with a single device

### PL e + SIL 3

The NS series switches are constructed with redundant electronics. As a result, the maximum PL e and SIL 3 safety levels can still be achieved through the use of a single device on a guard. This avoids expensive wiring in the field and allows faster installation. Inside the control cabinet, the two electronic safety outputs must be connected to a safety module with OSSD inputs or to a safety PLC.


## Series connection of several switches

### PL e + SIL 3

One of the most important features of the NS series is the possibility of connecting up to 32 sensors in series, while still maintaining the maximum safety levels PL e laid down in EN 13849-1 and SIL 3 acc. to EN IEC 62061:2021.

This connection type is permissible in safety systems which have a safety module at the end of the chain that monitors the outputs of the last NS switch.


The fact that the PL e safety level can be maintained even with 32 sensors connected in series demonstrates the extremely secure structure of each single device.

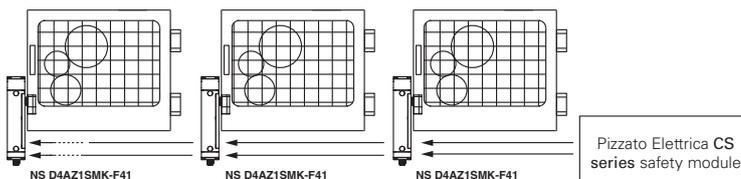

## Series connection with other devices

### PL e + SIL 3

The NS series features two safety inputs and two safety outputs, which can be connected in series with other Pizzato Elettrica safety devices. This option allows the creation of safety chains containing various devices. For example, stainless steel safety hinges (HX BEE1 series), RFID sensors (ST series) and door lock sensors (NG series) can be connected in series while still maintaining the maximum PL e and SIL 3 safety levels.

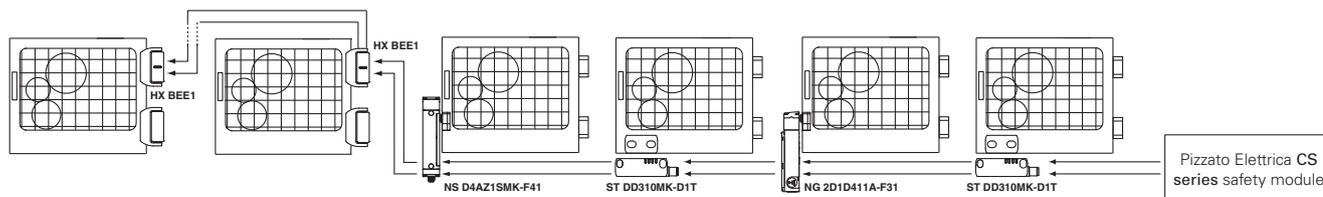


## RFID actuators with high coding level



The NS series is provided with an electronic system based on RFID technology to detect the actuator. This allows to provide each actuator with different coding and makes it impossible to tamper with a device by using another actuator of the same series. Millions of different coding combinations are possible for the actuators. They are therefore classified as high level coded actuators, according to EN ISO 14119.


The NS series is provided with an electronic system based on RFID technology to detect the actuator. This allows to provide each actuator with different coding and makes it impossible to tamper with a device by using another actuator of the same series. Millions of different coding combinations are possible for the actuators. They are therefore classified as high level coded actuators, according to EN ISO 14119.

## Holding force of the locked actuator




**2100 N** The strong interlocking system guarantees a maximum actuator holding force of  $F_{1max} = 2100$  N.

## Dustproof



The switch is provided with a through hole for inserting the actuator. Thanks to this unique feature, any dust that enters the actuator hole can always come out on the opposite side instead of remaining inside. Moreover, the lock pin is provided with a diaphragm seal, making the system suitable for critical environments with a high level of dust.


## Head and release devices with variable orientation, not detachable

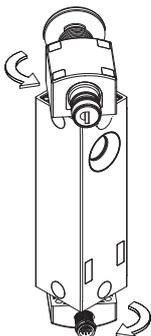

The upper part of the switch, which contains the release devices, can be rotated and is permanently connected to the lower part, which contains the outputs for the electrical connection. After loosening the fastening screws, the individual modules can be rotated in 90° steps. As a result, a single device can be used to realise various configurations without the installation technician needing to concern himself with the correct assembly of various parts.

The fastening screws are provided with protection caps to prevent dirt build-up and thereby simplify cleaning.

## Integrated control devices

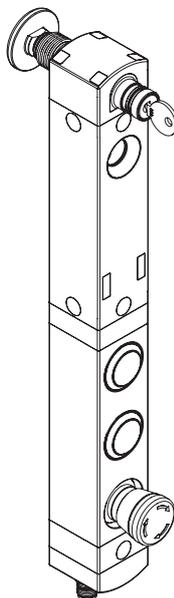

The NS series switches are also available in a version with a long housing, that has room for fitting 1 to 4 control devices, with the relevant contact blocks, on the same body of the safety device. This version has the same modular and orientation features as the NS switches.

To meet requirements for a range of uses, a number of different colour and types of control devices can be adopted such as, for example: buttons, emergency stop buttons, indicator lights, selector switches. Button lenses are customizable by laser engraving.

The control devices can be illuminated and protrude only slightly out of the housing thanks to the recessed housing hole.

The result is a compact solution with direct access to control devices without needing to install them separately on the switch panel or in their own housing.