


ORDERING INFORMATION

TMS-5010-□

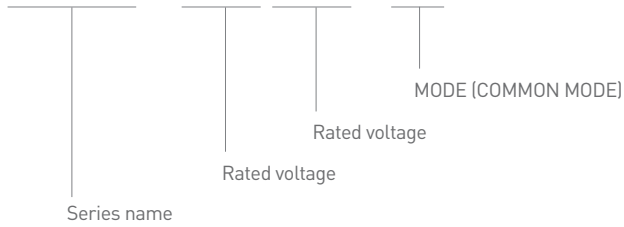

FEATURE

- High attenuation characteristics (150KHz~10MHz)
- Three Phase
- 2-Stage Filter
- Steel case / Safety cover
- Easy push-down Terminal Block



TMS SERIES SPECIFICATIONS



MODEL	RATED VOLTAGE (AC/DC)	RATED CURRENT	LEAKAGE CURRENT (60Hz)	TEMPERATURE RISE	OPERATING TEMPERATURE RANGE	APPROVAL
TMS-5006	500V Max	6A	5.0mA Max	50°C Max	-25 ~ +85°C	UL, C-UL, CE
TMS-5010	500V Max	10A	5.0mA Max	50°C Max	-25 ~ +85°C	UL, C-UL, CE
TMS-5020	500V Max	20A	5.0mA Max	50°C Max	-25 ~ +85°C	UL, C-UL, CE
TMS-5030	500V Max	30A	5.0mA Max	50°C Max	-25 ~ +85°C	UL, C-UL, CE
TMS-5040	500V Max	40A	5.0mA Max	50°C Max	-25 ~ +85°C	UL, C-UL, CE
TMS-5050	500V Max	50A	5.0mA Max	50°C Max	-25 ~ +85°C	UL, C-UL, CE
TMS-5060	500V Max	60A	5.0mA Max	50°C Max	-25 ~ +85°C	UL, C-UL, CE