


Zero Backlash Positioner

RollerDrive[®]

 **RGR** series Large-Diameter Model

*Large-diameter hole model with an open area of 30%
Significantly improved freedom of wiring and piping design*

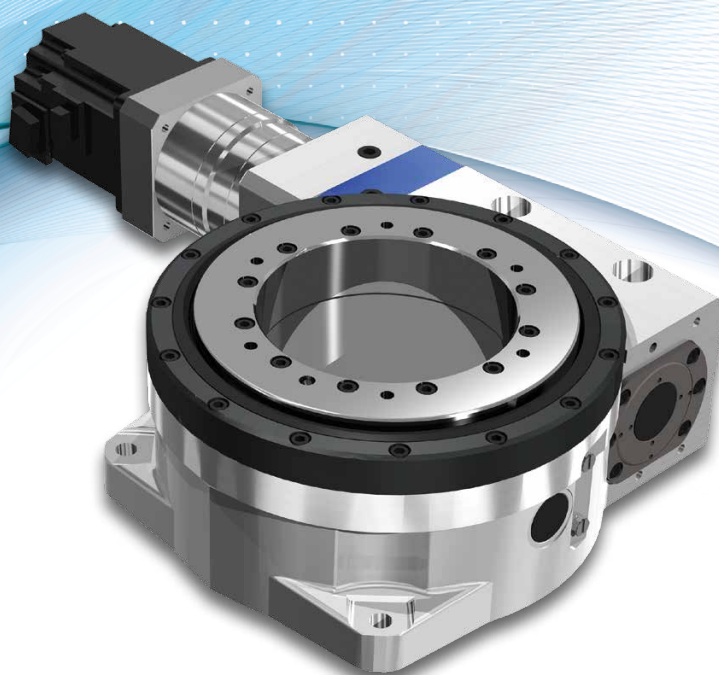

The ZERO-Backlash Technology


A mechanism developed through the pursuit of outstanding functionality and performance

Superior movement achieved with zero-backlash technology

The RollerDrive is a zero-backlash reducer that utilizes a rolling transmission method with preload adjustment for high-dimensional accuracy, responsiveness, and rigidity with stable performance over long periods.

The large-diameter hole construction with a direct input/output shaft layout enables a compact design with zero backlash.

Meanwhile, the rolling transmission method of the RollerDrive provides a characteristic long service life.

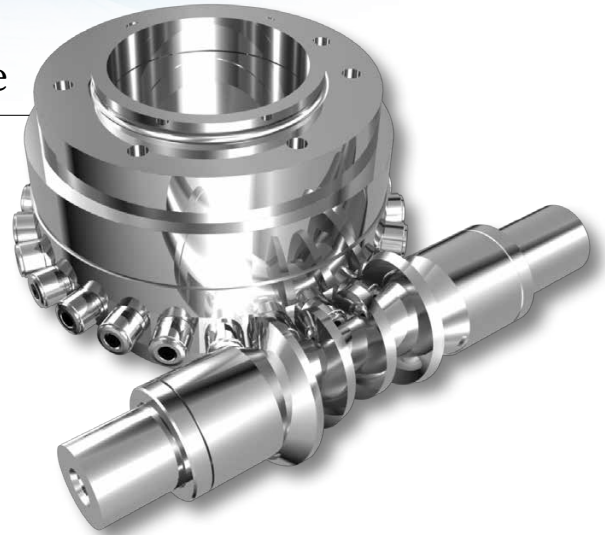

Positioner Lineup

For general factory automation


MR

Ultra-compact model



RGV

Standard model



RGR

Large-diameter model



RA

Lightweight model



RU

High-rigidity model



For welding machines


SP

Standard model




RW


High-accuracy model




Roller gear cam mechanism



Preload mechanism

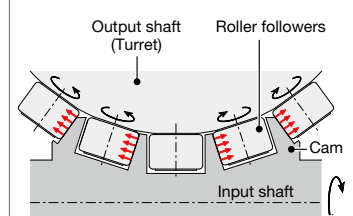


Performance Comparison

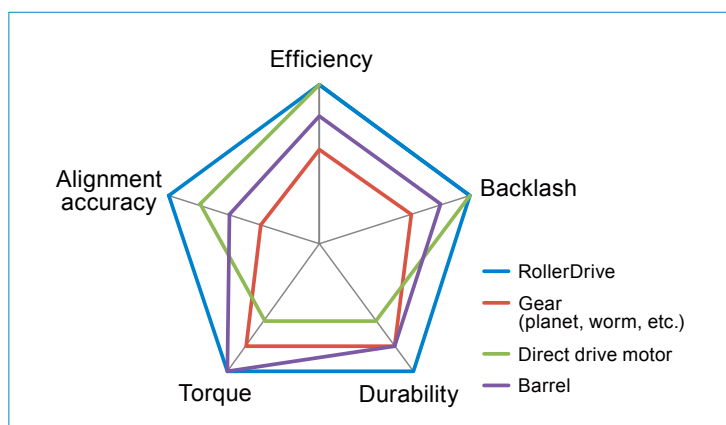


RollerDrive® RGR series

Zero-backlash positioner Large-diameter model

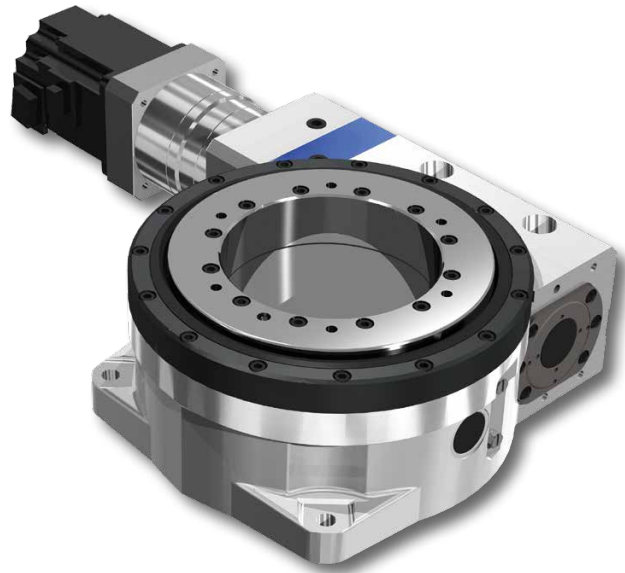

- Features**
- ▶ Large-diameter hole model with an open area of 30%
 - ▶ Improved freedom of wiring and piping design
 - ▶ Large output torque from a compact servo motor
 - ▶ Capable of handling heavy and uneven loads easily
 - ▶ Thin and lightweight body

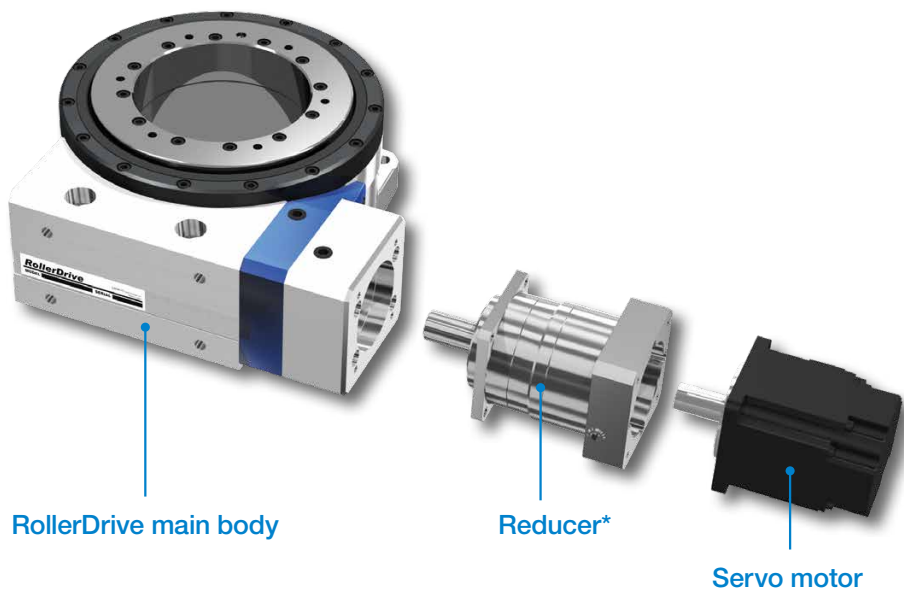


*For high gear ratio model

Product Code

Product Code

1	RGR	2	063	-	3	090	4	G	5	T	6	A	-	7	BJC
1	Model	2	Size		3	Gear ratio	4	Lubrication method	5	Servomotor position	6	Options		7	Attachment code
RGR		063			030, 090, 150		G : Greaselubrication Usable in any position/direction For oil lubrication: 1/2/3/4/5 See oil lubrication mounting codes below	T : Standard Mounted on right side of main unit U : Mounted on left side of main unit				Blank : None A : Rustproof specification B : Rustproof/dustproof/waterproof specification			See the list of mountable motors for each size ⇒ P. 10 to 12
		080													
		100				036, 108, 180									

RollerDrive components and mounting surface designations

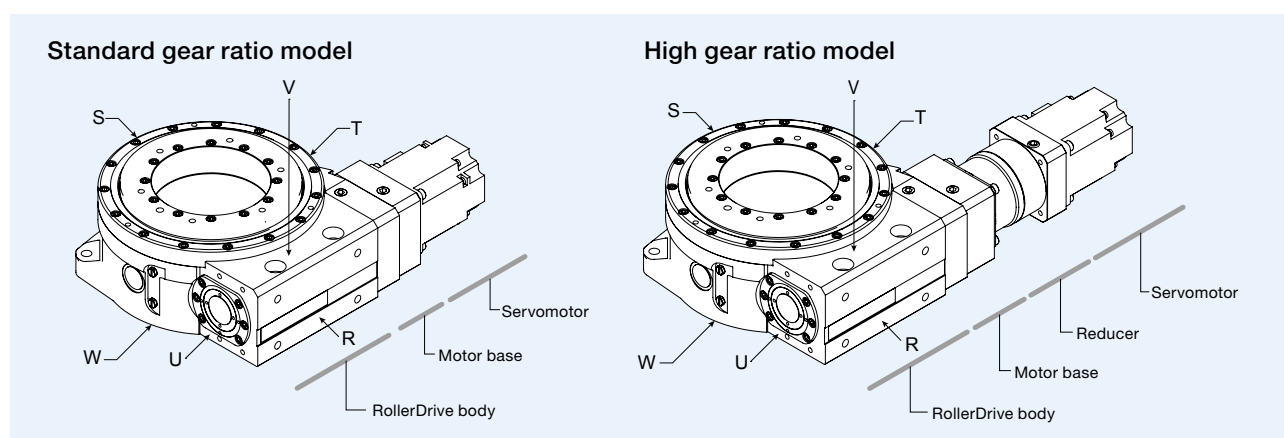

* Shown with servomotor on "T" surface

Oil lubrication mounting codes

1	2	3	4	5
W surface toward bottom	V surface toward bottom	U surface toward bottom	T surface toward bottom	R surface toward bottom

Product Specifications

Grease lubrication type

Model		RGR063			RGR080			RGR100		
Main unit gear ratio		30			36			36		
Reducer gear ratio		—	3	5	—	3	5	—	3	5
Total gear ratio		30	90	150	36	108	180	36	108	180
Start / Stop limit torque	N · m	124			157			179		
Static output torque	N · m	209			272			310		
Maximum input speed	min ⁻¹	1,800	5,400	6,000	1,600	4,800	6,000	1,400	4,200	6,000
Rated input speed	min ⁻¹	900	2,700	3,000	800	2,400	3,000	700	2,100	3,000
Maximum output speed ^{*1}	min ⁻¹	60	60	36	44.4	44.4	26.7	38.9	38.9	23.3
Rated output speed ^{*1}	min ⁻¹	30	30	18	22.2	22.2	13.3	19.4	19.4	11.7
Repeatability ^{*2}	arc sec or less	± 7			± 5			± 5		
Allowable axial load (load weight)	N	1,112			1,243			3,507		
Allowable radial load	N	745			833			2,350		
Allowable moment load	N · m	73			117			353		
Weight (not including motor) ^{*3}	kg	6.5	8.1		9.1	10.7		17.3	18.7	

*1 Contact Sankyo in the case of output with continuous rotation at 360 degrees or more.

*2 Indicates the accuracy for the main unit without the reducer.

*3 May vary slightly depending on reduction ratio and motor specifications.

Oil lubrication type

Model		RGR063			RGR080			RGR100		
Main unit gear ratio		30			36			36		
Reducer gear ratio		—	3	5	—	3	5	—	3	5
Total gear ratio		30	90	150	36	108	180	36	108	180
Start / Stop limit torque	N · m	153			194			220		
Static output torque	N · m	209			272			310		
Maximum input speed	min ⁻¹	3,000	6,000		2,800	6,000		2,400	6,000	
Rated input speed	min ⁻¹	1,500	3,000		1,400	3,000		1,200	3,000	
Maximum output speed ^{*1}	min ⁻¹	100	66.7	40.0	77.8	55.6	33.3	66.7	55.6	33.3
Rated output speed ^{*1}	min ⁻¹	50	33.3	20.0	38.9	27.8	16.7	33.3	27.8	16.7
Repeatability ^{*2}	arc sec or less	± 7			± 5			± 5		
Allowable axial load (load weight)	N	1,112			1,243			3,507		
Allowable radial load	N	745			833			2,350		
Allowable moment load	N · m	73			117			353		
Weight (not including motor) ^{*3}	kg	6.5	8.1		9.1	10.7		17.3	18.7	

*1 Contact Sankyo in the case of output with continuous rotation at 360 degrees or more.

*2 Indicates the accuracy for the main unit without the reducer.


*3 May vary slightly depending on reduction ratio and motor specifications.




Dynamic output torque

The limit for the load torque acting on the output shaft is indicated to satisfy the expected lifetime (12,000 hours) of the RollerDrive. Dynamic output torque varies according to the output rotational frequency.


RGR063

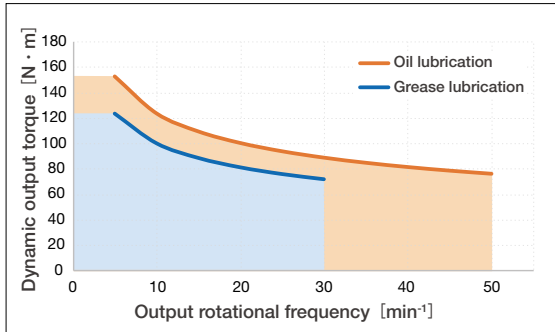

RGR080



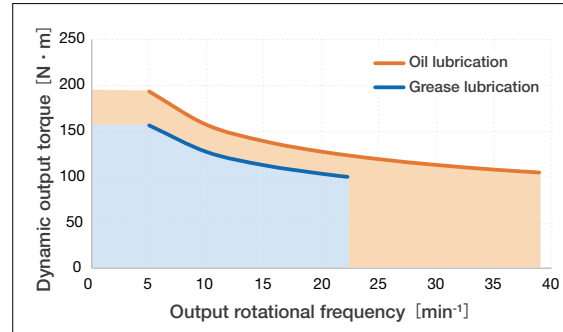


RGR100

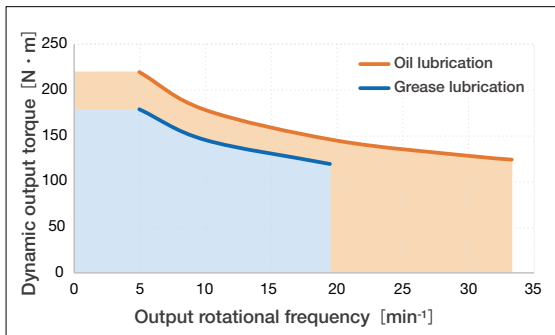


Torsional Rigidity


Torsional rigidity is the degree of shaft torsion for the output shaft torque.
Higher torsional rigidity means less torque deformation and higher natural frequency.

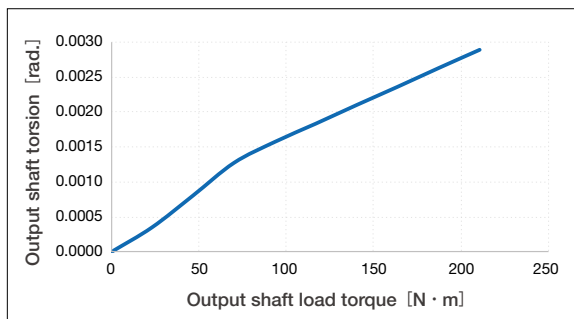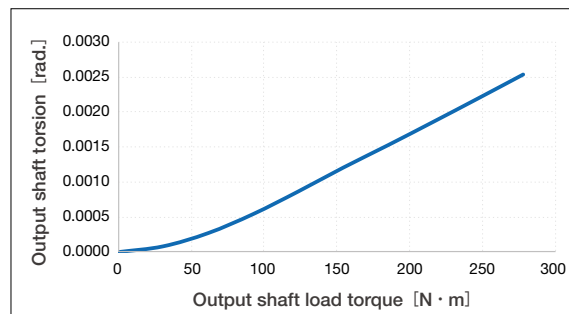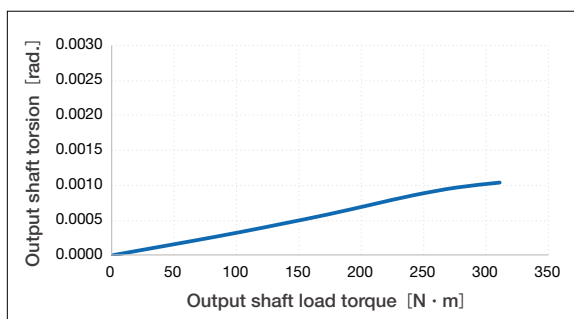RGR063**RGR080****RGR100**


► Dimensions of Standard Gear Ratio Models (Options: None/A)

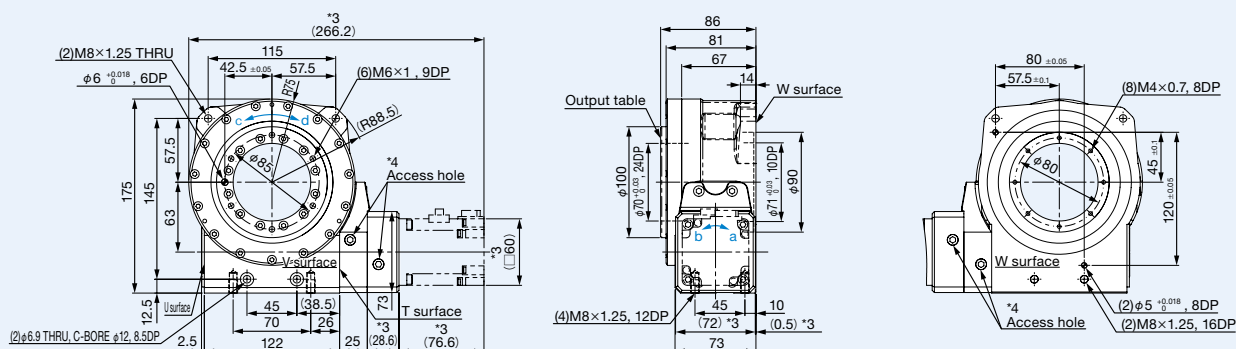


► Dimensions of Standard Gear Ratio Models (Options: B)

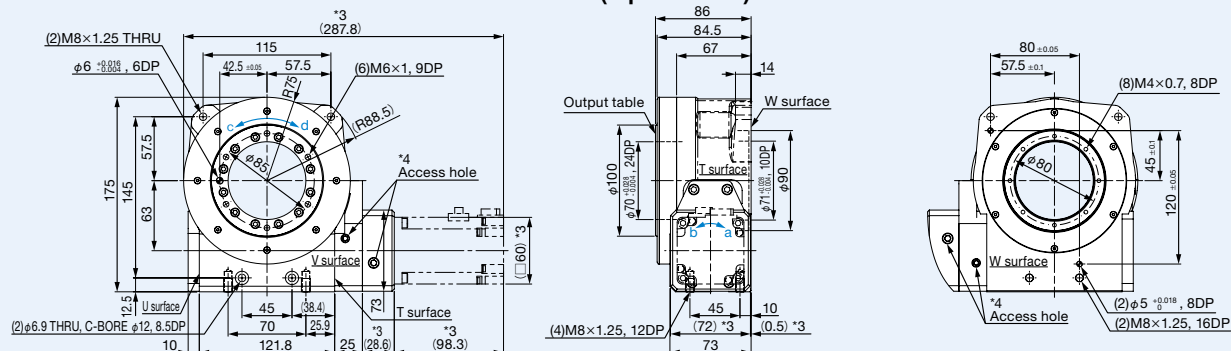

► Dimensions of High Gear Ratio Models (Options: None/A)

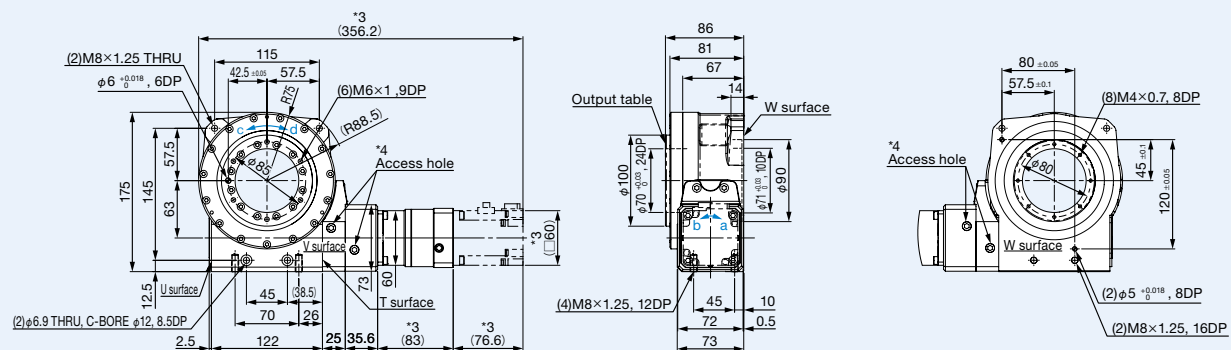

► Dimensions of High Gear Ratio Models (Options: B)

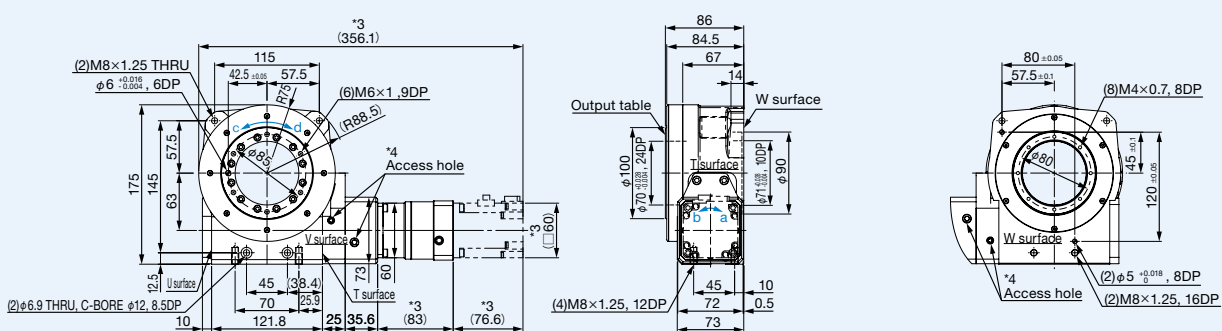


*1 This drawing is for a model where the motor is mounted on the T surface. *2 The rotating directions of input-output axes are related as a-d and b-c.

*3 Dimensions in parentheses () vary depending on the motor. *4 There are two access holes on the V surface and two on the W surface.


7 *5 Due to its mounting position, the positions of the oil plug, oil level, and drain differ for the oil lubrication type. See P. 13. *6 The servo motor will need to be prepared by the customer.

RGR080 Dimensions


► Dimensions of Standard Gear Ratio Models (Options: None/A)

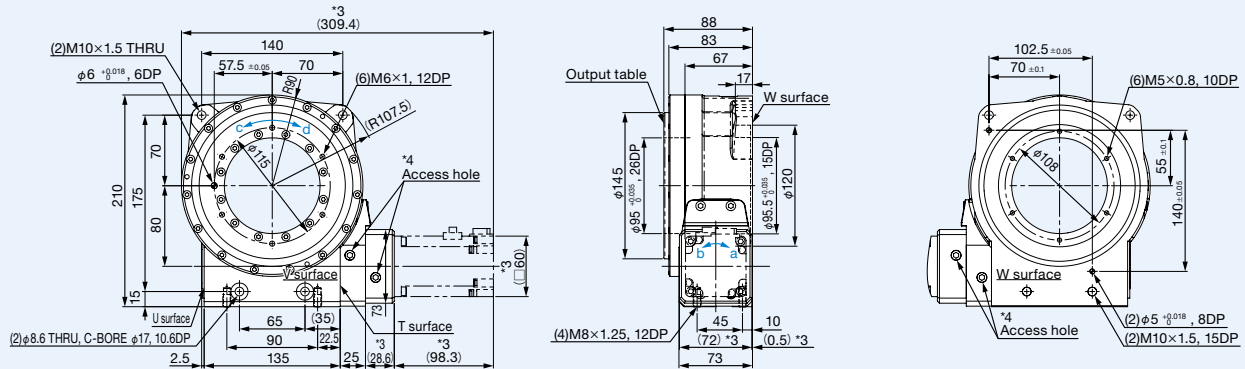


► Dimensions of Standard Gear Ratio Models (Options: B)

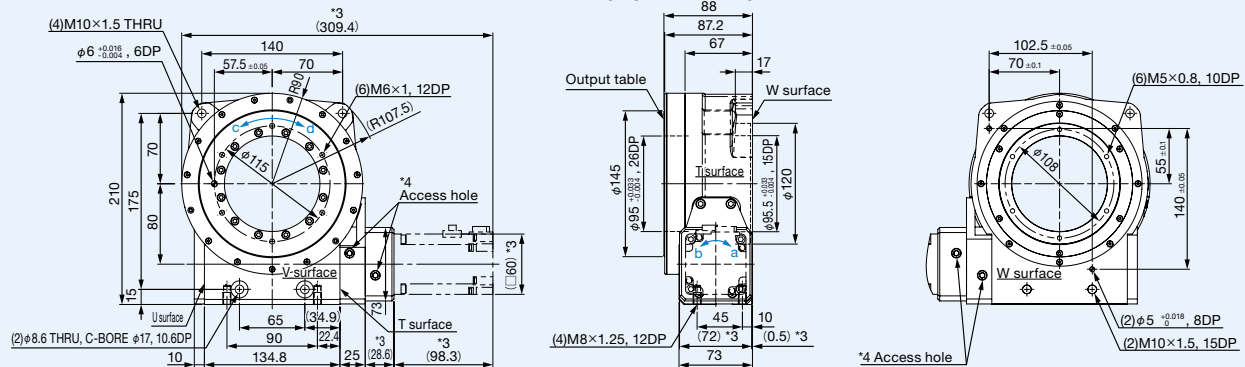

► Dimensions of High Gear Ratio Models (Options: None/A)

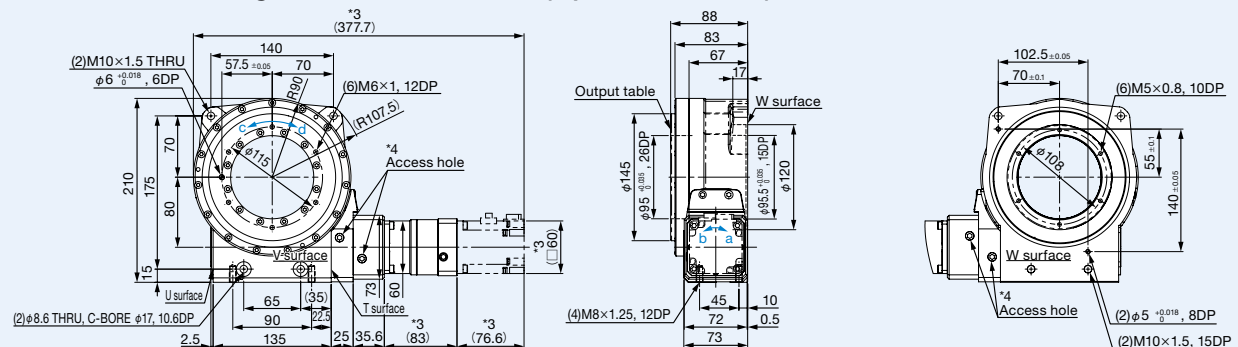

► Dimensions of High Gear Ratio Models (Options: B)

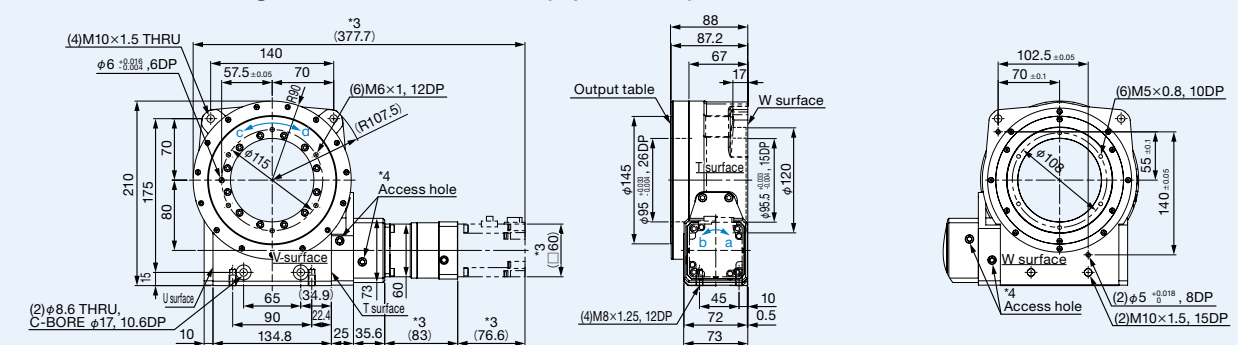


*1 This drawing is for a model where the motor is mounted on the T surface. *2 The rotating directions of input-output axes are related as a-d and b-c.

*3 Dimensions in parentheses () vary depending on the motor. *4 There are two access holes on the V surface and two on the W surface.


*5 Due to its mounting position, the positions of the oil plug, oil level, and drain differ for the oil lubrication type. See P. 13. *6 The servo motor will need to be prepared by the customer. 8

RGR100 Dimensions


► Dimensions of Standard Gear Ratio Models (Options: None/A)

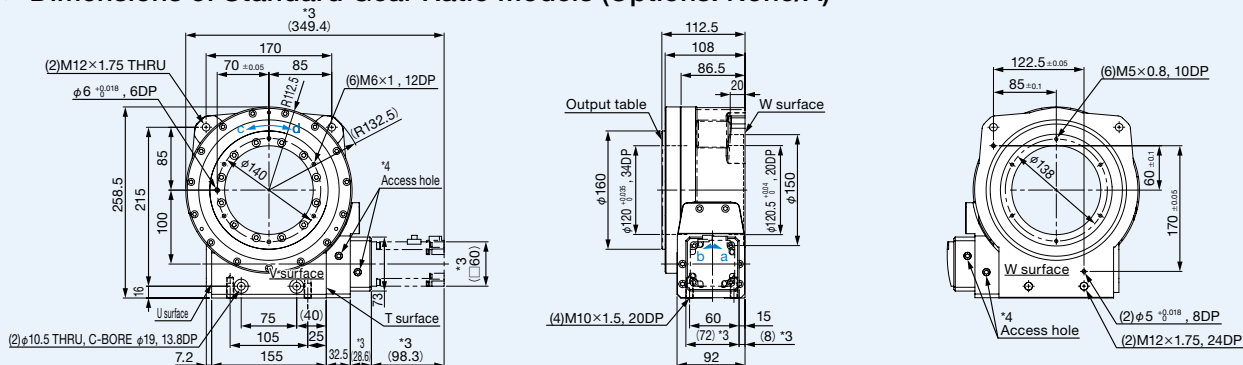


► Dimensions of Standard Gear Ratio Models (Options: B)

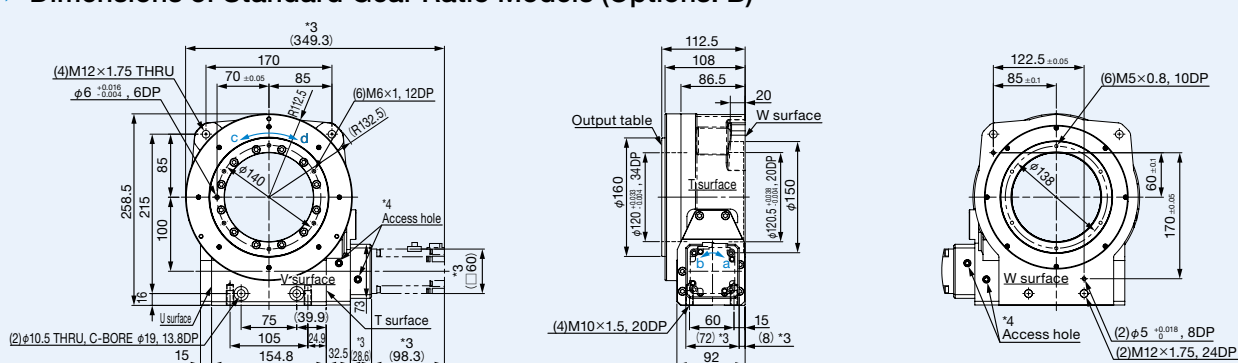

► Dimensions of High Gear Ratio Models (Options: None/A)

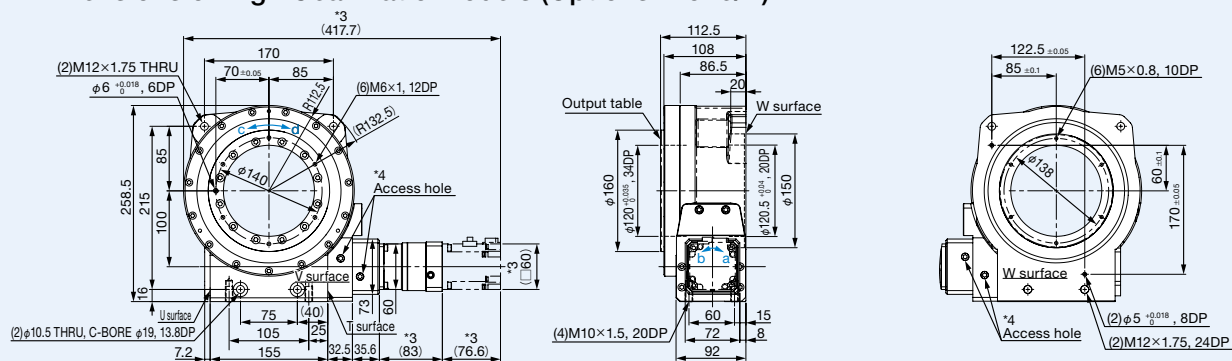

► Dimensions of High Gear Ratio Models (Options: B)

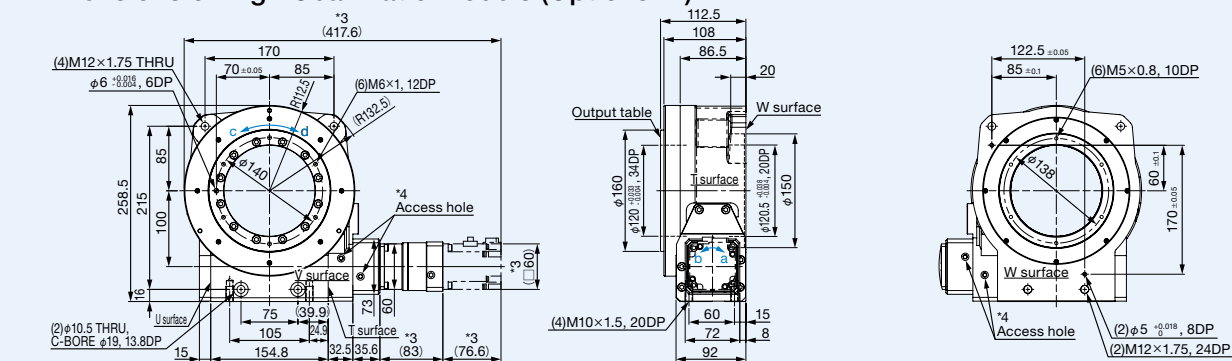

*1 This drawing is for a model where the motor is mounted on the T surface. *2 The rotating directions of input-output axes are related as a-d and b-c.

*3 Dimensions in parentheses () vary depending on the motor. *4 There are two access holes on the V surface and two on the W surface.

9 *5 Due to its mounting position, the positions of the oil plug, oil level, and drain differ for the oil lubrication type. See P. 13. *6 The servo motor will need to be prepared by the customer.

List of Mountable Servo Motors

RGR063 Standard gear ratio model [Gear ratio = 30]

Manufacturer	Series	Model	Motor capacity [KW]	Motor rated torque [N · m]	Motor max. torque [N · m]	Rated rotation speed [min ⁻¹]	Motor inertia [x10 ⁻⁴ kg · m ²]	Attachment code
OMRON	G	R88M-G40030H, T	0.4	1.3	3.67	3,000	0.26	CE
	G5	R88M-K40030H, T	0.4	1.3	3.8	3,000	0.26	CE
KEYENCE	SV	SV-M040	0.4	1.27	4.46	3,000	0.442	DE
	SV2	SV2-M040A	0.4	1.27	4.46	3,000	0.486	DE
Panasonic	MINAS_A5	MSMD042G1	0.4	1.3	3.8	3,000	0.26	CE
		MHMD042G1	0.4	1.3	3.8	3,000	0.67	CE
		MSME042G1	0.4	1.3	3.8	3,000	0.26	CE
	MINAS_A6	MSMF042L1	0.4	1.27	3.82	3,000	0.27	CE
		MHMF042L1	0.4	1.27	4.46	3,000	0.56	CE
FANUC	β iS	β iS1/6000	0.5	1.2	5	6,000	0.34	DE
Mitsubishi Electric	J4	HG-MR43	0.4	1.3	3.8	3,000	0.142	DE
		HG-KR43	0.4	1.3	4.5	3,000	0.371	DE
	J5	HK-KT43W	0.4	1.3	4.5	3,000	0.41	DE
		HK-KT63W	0.6	1.9	6.7	3,000	0.598	DE
		HK-KT43UW	0.4	1.3	4.5	3,000	0.726	EE
		HK-KT434W	0.2	1.3	4.5	1,500	0.41	DE
		HK-KT634W	0.3	1.9	6.7	1,500	0.598	DE
Yaskawa Electric	Σ 5	SGMAV-04A	0.4	1.27	3.82	3,000	0.19	DE
		SGMAV-06A	0.55	1.75	5.25	3,000	0.326	DE
		SGMJV-04A	0.4	1.27	4.46	3,000	0.442	DE
		SGMJV-06A	0.6	1.91	6.69	3,000	0.667	DE
	Σ 7	SGM7J-04A	0.4	1.27	4.46	3,000	0.486	DE
		SGM7J-06A	0.6	1.91	6.69	3,000	0.8	DE
		SGM7A-04A	0.4	1.27	4.46	3,000	0.216	DE
		SGM7A-06A	0.6	1.91	6.69	3,000	0.315	DE
Sanyo Denki	R2	R2AA06040H	0.4	1.27	4.8	3,000	0.412	DE
		R2AA06040F	0.4	1.27	4.8	3,000	0.412	DE
	R5	R5AA06040H	0.4	1.27	4.8	3,000	0.414	DE
		R5AA06040F	0.4	1.27	4.8	3,000	0.414	DE

RGR063 High gear ratio model [Gear ratio = 90, 150]

Manufacturer	Series	Model	Motor capacity [KW]	Motor rated torque [N · m]	Motor max. torque [N · m]	Rated rotation speed [min ⁻¹]	Motor inertia [x10 ⁻⁴ kg · m ²]	Attachment code	Corresponding reduction ratio	
									90	150
OMRON	G	R88M-G10030H, T	0.1	0.32	0.9	3,000	0.051	AG	-	○
		R88M-G20030H, T	0.2	0.64	1.78	3,000	0.14	BJC	○	-
	G5	R88M-K10030H, T	0.1	0.32	0.95	3,000	0.051	AG	-	○
		R88M-K20030H, T	0.2	0.64	1.91	3,000	0.14	BJC	○	-
KEYENCE	SV	SV-M010	0.1	0.318	1.11	3,000	0.0665	AG	-	○
		SV-M020	0.2	0.637	2.23	3,000	0.259	BK	○	-
	SV2	SV2-M010A	0.1	0.318	1.11	3,000	0.0659	AG	-	○
		SV2-M020A	0.2	0.637	2.23	3,000	0.263	BK	○	-
Panasonic	MINAS_A5	MSMD012G1	0.1	0.32	0.95	3,000	0.051	AF	-	○
		MSMD022G1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
		MHMD022G1	0.2	0.64	1.91	3,000	0.42	BJC	○	-
		MSME012G1	0.1	0.32	0.95	3,000	0.051	AF	-	○
		MSME022G1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
	MINAS_A6	MSMF012L1	0.1	0.32	0.95	3,000	0.048	AF	-	○
		MSMF022L1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
		MHMF012L1	0.1	0.32	1.11	3,000	0.071	AG	-	○
		MHMF022L1	0.2	0.64	2.23	3,000	0.29	BJC	○	-
Mitsubishi Electric	J4	HG-MR13	0.1	0.32	0.95	3,000	0.03	AG	-	○
		HG-MR23	0.2	0.64	1.9	3,000	0.0865	BM	○	-
		HG-KR13	0.1	0.32	1.1	3,000	0.0777	AG	-	○
		HG-KR23	0.2	0.64	2.2	3,000	0.221	BM	○	-
	J5	HK-KT13W	0.1	0.32	1.1	3,000	0.0686	AG	-	○
		HK-KT1M3W	0.15	0.48	1.7	3,000	0.0977	AG	○	-
		HK-KT13UW	0.1	0.32	1.1	3,000	0.121	BF	-	○
		HK-KT23W	0.2	0.64	2.2	3,000	0.209	BM	○	-
		HK-KT23UW	0.2	0.64	1.9	3,000	0.419	DG	○	-
Yaskawa Electric	Σ -V	SGMAV-01A	0.1	0.318	0.955	3,000	0.038	AG	-	○
		SGMAV-C2A	0.15	0.477	1.43	3,000	0.0531	AG	○	-
		SGMAV-02A	0.2	0.637	1.91	3,000	0.116	BK	○	-
		SGMJV-01A	0.1	0.318	1.11	3,000	0.0665	AG	-	○
		SGMJV-C2A	0.15	0.477	1.67	3,000	0.0883	AG	○	-
		SGMJV-02A	0.2	0.637	2.23	3,000	0.259	BK	○	-
	Σ -7	SGM7J-01A	0.1	0.318	1.11	3,000	0.0659	AG	-	○
		SGM7J-C2A	0.15	0.477	1.67	3,000	0.0915	AG	○	-
		SGM7J-02A	0.2	0.637	2.23	3,000	0.263	BK	○	-
		SGM7A-01A	0.1	0.318	1.11	3,000	0.0337	AG	-	○
		SGM7A-C2A	0.15	0.477	1.67	3,000	0.0458	AG	○	-
		SGM7A-02A	0.2	0.637	2.23	3,000	0.139	BK	○	-
		SGM7P-01A	0.1	0.318	0.955	3,000	0.0592	BE	-	○
		SGM7P-02A	0.2	0.637	1.91	3,000	0.263	DF	○	-
Sanyo Denki	R2	R2AA04010F	0.1	0.318	1.18	3,000	0.0627	AH	-	○
		R2AA06010F	0.1	0.318	1.13	3,000	0.117	BF	-	○
		R2AA06020F	0.2	0.637	2.2	3,000	0.219	BM	○	-
		R2AA08020F	0.2	0.637	2.2	3,000	0.52	DG	○	-
	R5	R5AA06020H	0.2	0.637	2.2	3,000	0.198	BM	○	-
		R5AA06020F	0.2	0.637	2.2	3,000	0.198	BM	○	-

*1 The customer will be responsible for preparing a servo motor with no keyway.

*2 Contact Sankyo for servo motors with brakes or with oil seals.

List of Mountable Servo Motors

RGR080 Standard gear ratio model [Gear ratio = 36]

Manufacturer	Series	Model	Motor capacity [KW]	Motor rated torque [N · m]	Motor max. torque [N · m]	Rated rotation speed [min ⁻¹]	Motor inertia [x10 ⁻⁴ kg · m ²]	Attachment code
OMRON	G	R88M-G40030H, T	0.4	1.3	3.67	3,000	0.26	CE
	G5	R88M-K40030H, T	0.4	1.3	3.8	3,000	0.26	CE
KEYENCE	SV	SV-M040	0.4	1.27	4.46	3,000	0.442	DE
	SV2	SV2-M040A	0.4	1.27	4.46	3,000	0.486	DE
Panasonic	MINAS_A5	MSMD042G1	0.4	1.3	3.8	3,000	0.26	CE
		MHMD042G1	0.4	1.3	3.8	3,000	0.67	CE
		MSME042G1	0.4	1.3	3.8	3,000	0.26	CE
	MINAS_A6	MSMF042L1	0.4	1.27	3.82	3,000	0.27	CE
		MHMF042L1	0.4	1.27	4.46	3,000	0.56	CE
FANUC	β iS	β iS1/6000	0.5	1.2	5	6,000	0.34	DE
Mitsubishi Electric	J4	HG-MR43	0.4	1.3	3.8	3,000	0.142	DE
		HG-KR43	0.4	1.3	4.5	3,000	0.371	DE
	J5	HK-KT43W	0.4	1.3	4.5	3,000	0.41	DE
		HK-KT63W	0.6	1.9	6.7	3,000	0.598	DE
		HK-KT43UW	0.4	1.3	4.5	3,000	0.726	EE
		HK-KT434W	0.2	1.3	4.5	1,500	0.41	DE
		HK-KT634W	0.3	1.9	6.7	1,500	0.598	DE
Yaskawa Electric	Σ -V	SGMAV-04A	0.4	1.27	3.82	3,000	0.19	DE
		SGMAV-06A	0.55	1.75	5.25	3,000	0.326	DE
		SGMJV-04A	0.4	1.27	4.46	3,000	0.442	DE
		SGMJV-06A	0.6	1.91	6.69	3,000	0.667	DE
	Σ -7	SGM7J-04A	0.4	1.27	4.46	3,000	0.486	DE
		SGM7J-06A	0.6	1.91	6.69	3,000	0.8	DE
		SGM7A-04A	0.4	1.27	4.46	3,000	0.216	DE
		SGM7A-06A	0.6	1.91	6.69	3,000	0.315	DE
Sanyo Denki	R2	R2AA06040H	0.4	1.27	4.8	3,000	0.412	DE
		R2AA06040F	0.4	1.27	4.8	3,000	0.412	DE
	R5	R5AA06040H	0.4	1.27	4.8	3,000	0.414	DE
		R5AA06040F	0.4	1.27	4.8	3,000	0.414	DE

RGR080 High gear ratio model [Gear ratio = 108、180]

Manufacturer	Series	Model	Motor capacity [KW]	Motor rated torque [N · m]	Motor max. torque [N · m]	Rated rotation speed [min ⁻¹]	Motor inertia [x10 ⁻⁴ kg · m ²]	Attachment code	Corresponding reduction ratio	
									108	180
OMRON	G	R88M-G10030H, T	0.1	0.32	0.9	3,000	0.051	AG	-	○
		R88M-G20030H, T	0.2	0.64	1.78	3,000	0.14	BJC	○	-
	G5	R88M-K10030H, T	0.1	0.32	0.95	3,000	0.051	AG	-	○
		R88M-K20030H, T	0.2	0.64	1.91	3,000	0.14	BJC	○	-
KEYENCE	SV	SV-M010	0.1	0.318	1.11	3,000	0.0665	AG	-	○
		SV-M020	0.2	0.637	2.23	3,000	0.259	BK	○	-
	SV2	SV2-M010A	0.1	0.318	1.11	3,000	0.0659	AG	-	○
		SV2-M020A	0.2	0.637	2.23	3,000	0.263	BK	○	-
Panasonic	MINAS_A5	MSMD012G1	0.1	0.32	0.95	3,000	0.051	AF	-	○
		MSMD022G1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
		MHMD022G1	0.2	0.64	1.91	3,000	0.42	BJC	○	-
		MSME012G1	0.1	0.32	0.95	3,000	0.051	AF	-	○
		MSME022G1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
	MINAS_A6	MSMF012L1	0.1	0.32	0.95	3,000	0.048	AF	-	○
		MSMF022L1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
		MHMF012L1	0.1	0.32	1.11	3,000	0.071	AG	-	○
		MHMF022L1	0.2	0.64	2.23	3,000	0.29	BJC	○	-
FANUC	β iS	β iS0.5/6000	0.35	0.65	2.5	6,000	0.18	BKA	○	-
Mitsubishi Electric	J4	HG-MR13	0.1	0.32	0.95	3,000	0.03	AG	-	○
		HG-MR23	0.2	0.64	1.9	3,000	0.0865	BM	○	-
		HG-KR13	0.1	0.32	1.1	3,000	0.0777	AG	-	○
		HG-KR23	0.2	0.64	2.2	3,000	0.221	BM	○	-
	J5	HK-KT13W	0.1	0.32	1.1	3,000	0.0686	AG	-	○
		HK-KT1M3W	0.15	0.48	1.7	3,000	0.0977	AG	○	-
		HK-KT13UW	0.1	0.32	1.1	3,000	0.121	BF	-	○
		HK-KT23W	0.2	0.64	2.2	3,000	0.209	BM	○	-
		HK-KT23UW	0.2	0.64	1.9	3,000	0.419	DG	○	-
Yaskawa Electric	Σ -V	SGMAV-01A	0.1	0.318	0.955	3,000	0.038	AG	-	○
		SGMAV-C2A	0.15	0.477	1.43	3,000	0.0531	AG	○	○
		SGMAV-02A	0.2	0.637	1.91	3,000	0.116	BK	○	-
		SGMJV-01A	0.1	0.318	1.11	3,000	0.0665	AG	-	○
		SGMJV-C2A	0.15	0.477	1.67	3,000	0.0883	AG	○	-
		SGMJV-02A	0.2	0.637	2.23	3,000	0.259	BK	○	-
	Σ -7	SGM7J-01A	0.1	0.318	1.11	3,000	0.0659	AG	-	○
		SGM7J-C2A	0.15	0.477	1.67	3,000	0.0915	AG	○	-
		SGM7J-02A	0.2	0.637	2.23	3,000	0.263	BK	○	-
		SGM7A-01A	0.1	0.318	1.11	3,000	0.0337	AG	-	○
		SGM7A-C2A	0.15	0.477	1.67	3,000	0.0458	AG	○	-
		SGM7A-02A	0.2	0.637	2.23	3,000	0.139	BK	○	-
		SGM7P-01A	0.1	0.318	0.955	3,000	0.0592	BE	-	○
		SGM7P-02A	0.2	0.637	1.91	3,000	0.263	DF	○	-
Sanyo Denki	R2	R2AA04010F	0.1	0.318	1.18	3,000	0.0627	AH	-	○
		R2AA06010F	0.1	0.318	1.13	3,000	0.117	BF	-	○
		R2AA06020F	0.2	0.637	2.2	3,000	0.219	BM	○	-
		R2AA08020F	0.2	0.637	2.2	3,000	0.52	DG	○	-
	R5	R5AA06020H	0.2	0.637	2.2	3,000	0.198	BM	○	-
		R5AA06020F	0.2	0.637	2.2	3,000	0.198	BM	○	-

*1 The customer will be responsible for preparing a servo motor with no keyway.

*2 Contact Sankyo for servo motors with brakes or with oil seals.

List of Mountable Servo Motors

RGR100 Standard gear ratio model [Gear ratio = 36]

Manufacturer	Series	Model	Motor capacity [kW]	Motor rated torque [N · m]	Motor max. torque [N · m]	Rated rotation speed [min ⁻¹]	Motor inertia [x10 ⁻⁴ kg · m ²]	Attachment code
OMRON	G	R88M-G40030H, T	0.4	1.3	3.67	3,000	0.26	CE
	G5	R88M-K40030H, T	0.4	1.3	3.8	3,000	0.26	CE
Panasonic	MINAS_A5	MSMD042G1	0.4	1.3	3.8	3,000	0.26	CE
		MHMD042G1	0.4	1.3	3.8	3,000	0.67	CE
		MSME042G1	0.4	1.3	3.8	3,000	0.26	CE
FANUC	α iF	α iF2/5000	0.75	2	8.3	4,000	5.26	HC
	α iS	α iS2/5000	0.75	2	7.8	4,000	2.91	HC
		α iS2/6000	1	2	6	6,000	2.91	HC
		α iS4/6000	1	3	7.5	6,000	5.15	GG
	β iS	β iS2/4000	0.5	2	7	4,000	2.91	HC
Mitsubishi Electric	J4	HG-MR43	0.4	1.3	3.8	3,000	0.142	DE
		HG-MR73	0.75	2.4	7.2	3,000	0.586	FF
		HG-KR43	0.4	1.3	4.5	3,000	0.371	DE
	J5	HK-KT43W	0.4	1.3	4.5	3,000	0.41	DE
		HK-KT63W	0.6	1.9	6.7	3,000	0.598	DE
		HK-KT43UW	0.4	1.3	4.5	3,000	0.726	EE
		HK-KT7M3W	0.75	2.4	8.4	3,000	1.37	FF
		HK-KT7M3UW	0.75	2.4	8.4	3,000	2.11	IF
		HK-KT434W	0.2	1.3	4.5	1,500	0.41	DE
		HK-KT634W	0.3	1.9	6.7	1,500	0.598	DE
		HK-KT7M34W	0.375	2.4	8.4	1,500	1.37	FF
Yaskawa Electric	Σ -V	SGMAV-06A	0.55	1.75	5.25	3,000	0.326	DE
		SGMJV-06A	0.6	1.91	6.69	3,000	0.667	DE
	Σ -7	SGM7J-06A	0.6	1.91	6.69	3,000	0.8	DE
		SGM7A-06A	0.6	1.91	6.69	3,000	0.315	DE

RGR100 High gear ratio model [Gear ratio = 108, 180]

Manufacturer	Series	Model	Motor capacity [kW]	Motor rated torque [N · m]	Motor max. torque [N · m]	Rated rotation speed [min ⁻¹]	Motor inertia [x10 ⁻⁴ kg · m ²]	Attachment code	Corresponding reduction ratio	
OMRON	G	R88M-G20030H, T	0.2	0.64	1.78	3,000	0.14	BJC	○	-
	G5	R88M-K20030H, T	0.2	0.64	1.91	3,000	0.14	BJC	○	-
KEYENCE	SV	SV-M020	0.2	0.637	2.23	3,000	0.259	BK	○	-
	SV2	SV2-M020A	0.2	0.637	2.23	3,000	0.263	BK	○	-
Panasonic	MINAS_A5	MSMD022G1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
		MHMD022G1	0.2	0.64	1.91	3,000	0.42	BJC	○	-
		MSME022G1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
	MINAS_A6	MSMF022L1	0.2	0.64	1.91	3,000	0.14	BJC	○	-
Mitsubishi Electric	J4	HG-MR23	0.2	0.64	1.9	3,000	0.0865	BM	○	-
		HG-KR23	0.2	0.64	2.2	3,000	0.221	BM	○	-
	J5	HK-KT1M3W	0.15	0.48	1.7	3,000	0.0977	AG	-	○
		HK-KT23W	0.2	0.64	2.2	3,000	0.209	BM	○	-
Yaskawa Electric	Σ -V	HK-KT23UW	0.2	0.64	1.9	3,000	0.419	DG	○	-
		SGMAV-C2A	0.15	0.477	1.43	3,000	0.0531	AG	-	○
		SGMAV-02A	0.2	0.637	1.91	3,000	0.116	BK	○	-
		SGMJV-C2A	0.15	0.477	1.67	3,000	0.0883	AG	-	○
	Σ -7	SGMJV-02A	0.2	0.637	2.23	3,000	0.259	BK	○	-
		SGM7J-C2A	0.15	0.477	1.67	3,000	0.0915	AG	-	○
		SGM7J-02A	0.2	0.637	2.23	3,000	0.263	BK	○	-
		SGM7A-C2A	0.15	0.477	1.67	3,000	0.0458	AG	-	○
		SGM7A-02A	0.2	0.637	2.23	3,000	0.139	BK	○	-
		SGM7P-02A	0.2	0.637	1.91	3,000	0.263	DF	○	-
Sanyo Denki	R2	R2AA06020F	0.2	0.637	2.2	3,000	0.219	BM	○	-
		R2AA08020F	0.2	0.637	2.2	3,000	0.52	DG	○	-
	R5	R5AA06020H	0.2	0.637	2.2	3,000	0.198	BM	○	-
		R5AA06020F	0.2	0.637	2.2	3,000	0.198	BM	○	-

*1 The customer will be responsible for preparing a servo motor with no keyway.

*2 Contact Sankyo for servo motors with brakes or with oil seals.

Oil Plug, Oil Level, Drain Position (Oil lubrication types)



Unit: mm

Mounting position	1	2	3	4	5
RGR063					
A	Oil plug Rc 1/4	Oil plug Rc 1/4	Oil plug Rc 1/4	Oil plug Rc 1/4	Oil plug Rc 1/4
A1	47	24	15°	25°	24
A2	—	—	36.5	36.5	—
B	Oil level	Oil level	Oil level	Oil level	Oil level
B1	36.5	36.5	28	94	30
B2	100	100	38	38	—
C	Drain Rc 1/4	Drain Rc 1/4	Drain Rc 1/4	Drain Rc 1/4	Drain Rc 1/4
C1	24	47	25°	15°	47
C2	—	—	36.5	36.5	—
Oil amount (L)	0.12	0.1	0.15	0.15	0.02
RGR080					
A	Oil plug Rc 3/8	Oil plug Rc 1/4	Oil plug Rc 3/8	Oil plug Rc 3/8	Oil plug Rc 1/4
A1	47	24	36.5	25°	24
A2	—	—	120	36.5	—
B	Oil level	Oil level	Oil level	Oil level	Oil level
B1	36.5	36.5	30.5	104.5	30
B2	120	120	38	38	52.5
C	Drain Rc 1/4	Drain Rc 3/8	Drain Rc 3/8	Drain Rc 3/8	Drain Rc 3/8
C1	24	47	25°	36.5	47
C2	—	—	36.5	120	—
Oil amount (L)	0.16	0.1	0.18	0.18	0.05
RGR100					
A	Oil plug Rc 3/8	Oil plug Rc 3/8	Oil plug Rc 3/8	Oil plug Rc 3/8	Oil plug
A1	58	33	44	25°	33
A2	—	—	146	44	—
B	Oil level	Oil level	Oil level	Oil level	Oil level
B1	44	44	30.5	124.5	41
B2	146	146	52	52	—
C	Drain Rc 3/8	Drain Rc 3/8	Drain Rc 3/8	Drain Rc 3/8	Drain
C1	33	58	25°	44	58
C2	—	—	44	146	—
Oil amount (L)	0.24	0.21	0.33	0.32	0.06

Attention: _____

Date: _____

Our contact person: _____

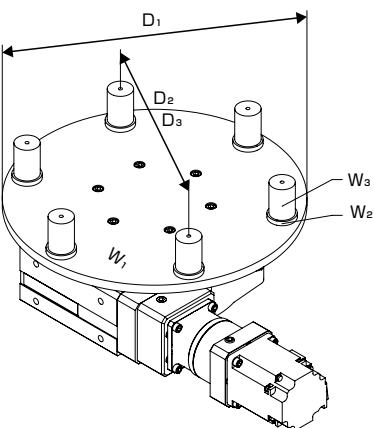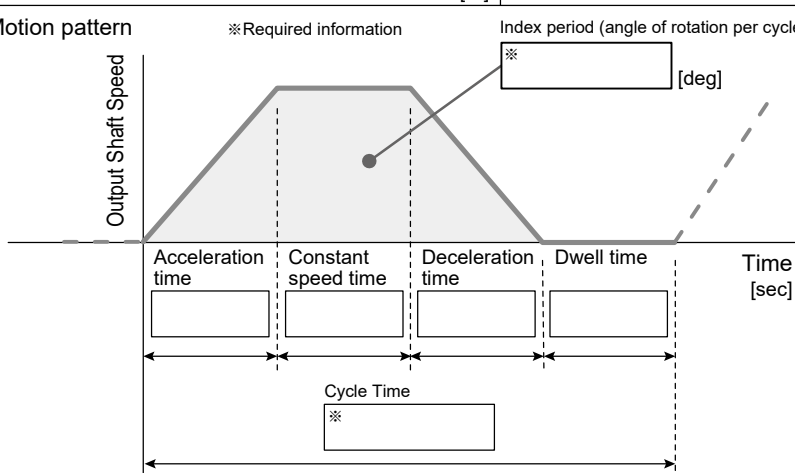Model Sizing Form for the <i>RollerDrive</i>® RGR series			
Customer's Company, Department		Tel	
Address		Fax	
Name	Email		
A) Application			
B) Overview drawing, loads, operating environment, etc. (Include any tables, workpieces, or jigs that will be attached to the RGR output shaft, and any loads that will be applied during rotation.)			
		Table diameter : D ₁ [mm]	
		Table weight : W ₁ [kg]	
		Jig P.C.D. : D ₂ [mm]	
		Weight per jig : W ₂ [kg]	
		Jig quantity : n ₂ [pcs]	
		Workpiece P.C.D. : D ₃ [mm]	
		Weight per workpiece : W ₃ [kg]	
Load applied to output shaft			
Axial/radial load	Moment load	Workpiece quantity : n ₃	
[N]	[N·m]	[pcs]	
C) Motion pattern ※Required information  Index period (angle of rotation per cycle) [deg]		E) Intended servomotor Manufacturer Model No. Motor power (rated output) [kW]	
D) Lubrication method and position/direction Please choose one. Lubrication method : ☐ Grease lubrication ☐ Oil lubrication Position/direction : ☐ W surface toward bottom ☐ U surface toward bottom ☐ V surface toward bottom ☐ T surface toward bottom ☐ R surface toward bottom		F) Mounting direction of servomotor T surface (right side viewed from front) U surface (left side viewed from front) Circle applicable answer. G) Attachment code 	
H) Options ☐ None ☐ A : Rustproof ☐ B : Rustproof/dustproof/waterproof			

Handling

Installation Site

The RollerDrive products with standard specifications should be installed in locations where they can be easily checked and maintained. Specifically:

- Environment temperature from 5 to +40°C
Depending on the operation pattern, the product surface temperature may rise because of heating in the motor or the product itself.
Ensure cooling to 60°C or less using a fan or the like.
- Humidity under 85% (no condensation)
- Non vacuum or extreme pressure
- No exposure to water, oil, chemicals, dusts, etc.
- No existence of explosive gas, other hazardous gas, or radio active materials
- No direct sunlight
- Excessive shock or force does not act
- Minimal electromagnetic noise, and isolated from currents (Take particular care near welders, etc.).
- Minimum electro magnetic noise (be cautious on welding machines)

Installation Procedure

The RollerDrive should be put in the operating position and installed on a smooth, robust place.

After installing the main unit, attach the drive target to the output flange.

Tightening torque (Table 1)

Housing threads (aluminum)

Unit : N·m

Tightening torque (Table 2)

Output shaft threads (iron-based)

Unit : N·m

Thread size	Specified tightening torque (DIN6.8)
M8	18.5
M10	36.0
M12	63.0

Thread size	Specified tightening torque (DIN10.9)
M4	4.1
M5	8.5
M6	14.0

To prevent the bolts from loosening inadvertently, apply Loctite 242 or equivalent and use a torque wrench to apply the specified torque. (Refer to the tables on the left for the tightening torque.)

Lubrication

RGR series products are available in one of two lubrication methods: Grease lubrication, which is the basic specification, or oil lubrication, which allows for high-speed rotation.

• Grease lubrication

Units are generally maintenance-free, eliminating the need for regular grease replacement.

(Please contact Sankyo for any questions about lubrication.)

Lubricating grease: Epnoc grease AP (N) 2 from JXTG Nippon Oil & Energy Corporation

• Oil lubrication

Units use high-performance oil for lubrication. Although the oil used for lubrication is scientifically and thermally stable, change the oil after every 3,000 hours of operation to ensure a longer product service life. The oil level indicator can be used to check the condition of the lubricating oil. Stop operation before checking the condition.

Check the amount and color of the oil. If the oil amount has decreased, or if discoloration is found, replace the oil regardless of the operating time. Note that fine bubbles may appear in the oil during operation. This does not indicate a problem with the oil quality.

* When changing the oil, use only the lubricating oil specified below.

Using an oil other than the one specified below for lubrication may shorten the product's service life or cause the components to deteriorate.

Specified standard lubricating oil: Mobil SHC629 (VG150)

Please refer to the instruction manual for product handling details.


Handling

▶ Rustproof/dustproof/waterproof specifications

Rustproof/dustproof/waterproof specifications are available protection options for RGR series units.

Following tests conducted under IP67 testing conditions (IEC 60529), TÜV Rheinland Japan Ltd., has confirmed that the RGR series housing is waterproof and dustproof.

(Tests were performed with the RGR063.)



IP is the abbreviation for International Protection, which indicates

the degree of protection necessary to prevent foreign matter (steel balls, copper wires, dust, water, etc.) from entering the housing of electrical or mechanical products. A rating of IP6X indicates complete protection against dust, and IPX7 indicates that there is no intrusion of water even if a product is submerged in water at a specified pressure (at 15 cm to 1 m below the surface) for a certain amount of time (at least 30 minutes).

- A rustproof/dustproof/waterproof rating is not a guarantee against malfunction or for a specific operational lifetime.
- Units are not protected from the intrusion of all solids and liquids under all environments.
- RGR series units are rated IP54 or equivalent unless the dustproof/waterproof option is specified.

⚠ Limitations on the use of this product

- This product cannot be used in applications where operation of the product has a direct impact in human life, or can cause bodily harm to people.

The scope of these use limitations includes the following applications:

- Medical equipment
- Nuclear power related equipment
- Aerospace equipment
- Equipment for handling explosive, corrosive or toxic substances etc.

- Please consult with our company if you are considering use in one of the above applications.
- If there is a possibility that this product will be used in a final use location outside Japan, in weapons or equipment for weapon manufacture, then it may be subject to regulation due to the Foreign Exchange and Foreign Trade Control Law. Please take extra care with regard to the application and region of use, and properly submit applications and follow procedures if necessary.


⚠ Notes on information

- Specifications, dimensions and other information relating to this product provided in this catalog are subject to change without prior notice.
- The information in this catalog is current as of October 2020.
- Patent rights and copyrights for some mechanisms, trademarks, images, drawings and other material in this catalog all belong to Sankyo Seisakusho Co. Copying, reuse or distribution of any material in this catalog without the permission of Sankyo Seisakusho is forbidden.



Positioner Lineup

Standard model **RGV series**

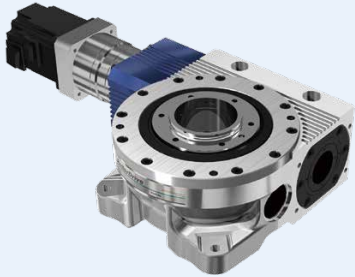

〈Features〉

- ▶ Varied lineup of reduction ratios and sizes
- ▶ Large torque from a compact servo motor
- ▶ Capable of handling heavy and uneven loads easily
- ▶ Usable under harsh conditions (rustproof, waterproof, and dustproof options)

〈Sizes〉

- ▶ Axial distance: 40, 63, 80, 100, 125 (mm)

Ultra-compact model **MR series**



〈Features〉

- ▶ Ultra-compact zero-backlash positioner
- ▶ Maintenance free
- ▶ High freedom of motor selection
- ▶ Usable in any position/direction

〈Sizes〉

- ▶ Axial distance: 20, 25, 32 (mm)

Lightweight model **RA series**




〈Features〉

- ▶ Lightweight and compact
- ▶ The large-diameter hollow bore makes wiring and piping easy
- ▶ High accuracy and good efficiency
- ▶ Capable of handling uneven loads easily

〈Sizes〉

- ▶ Axial distance: 40, 63, 80, 100, 125 (mm)

High-rigidity model **RU series**

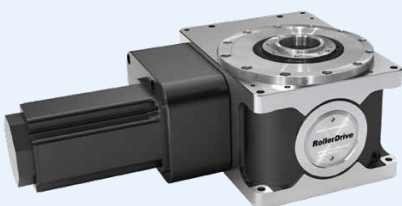


〈Features〉

- ▶ High load driving force from a compact servo motor
- ▶ High rigidity
- ▶ High freedom of servo motor selection
- ▶ Usable under harsh conditions (waterproof and dustproof options)

〈Sizes〉

- ▶ Axial distance: 40, 63, 80, 100, 125, 160, 200, 250, 315, 400, 500 (mm)

Global network

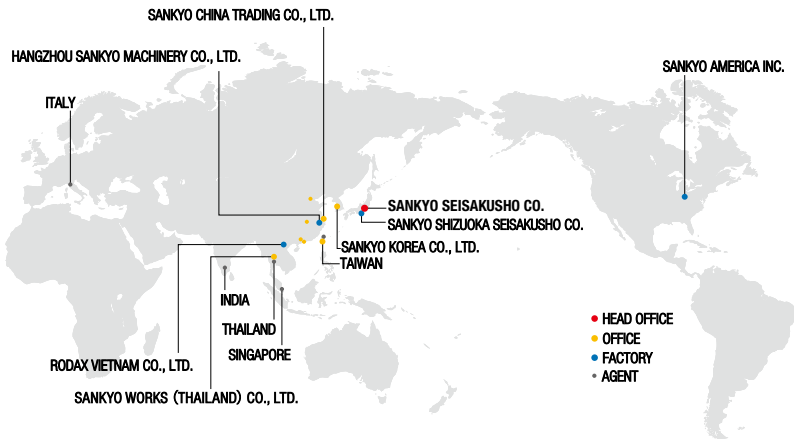

Group Company

SANKYO AMERICA INC.

10655 State Route 47 Sidney, Ohio, 45365 U.S.A.
PHONE: +1-(0)937-498-4901 • FAX: +1-(0)937-498-9403
E-mail: sales@sankyoautomation.com

SANKYO KOREA CO., LTD.

1449-48 Seobu-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, 16643 Korea
PHONE: +82-(0)31-895-5991 • FAX: +82-(0)31-895-6607
E-mail: kr-sales@rollerdrive.com

SANKYO CHINA TRADING CO., LTD.

[SHANGHAI HEAD OFFICE]

Room 1103, Block B, No.391 Guiping Road,
Shanghai 200233 China
PHONE: +86-(0)21-5445-2813 • FAX: +86-(0)21-5445-2340
E-mail: sales@sankyochina-trading.com

[SHENZHEN BRANCH OFFICE]

Unit 19J, Tower B, NEO Building, No.6009 Shennan Avenue,
Futian District, Shenzhen China
PHONE: +86-(0)755-8230-0270 • FAX: +86-(0)755-8236-4605

[TIANJIN BRANCH OFFICE]

Room 1905, Pengzhanfeiwo Building A, Crossing Yale Road Yaolin Road,
Xiqing District, Tianjin 300380 China
PHONE: +86-(0)22-2312-1005 • FAX: +86-(0)22-2312-1007

[GUANGZHOU BRANCH OFFICE]

Room 913, Xing Pu building, No.12 Guan Hong Road,
Guangzhou Economic Development Zone, Huang Pu, Guang Zhou 510670 China
PHONE: +86-(0)20-8985-1846 • FAX: +86-(0)20-8225-7346

[WUHAN BRANCH OFFICE]

Room 2301, Taihe Square, No.134 Wusheng Road, Wuhan,
Hubei Province China
PHONE: +86-(0)27-8568-5818 • FAX: +86-(0)27-8568-2818

HANGZHOU SANKYO MACHINERY CO., LTD.

No.2518 Jiang Dong 2 Road, Hangzhou Jiang Dong Industrial Park,
Xiaoshan Zone, Hangzhou, Zhejiang, China
PHONE: +86-(0)571-8283-3311 • FAX: +86-(0)571-8283-1133

RODAX VIETNAM CO., LTD.

Plot No. M1, Thang Long Industrial Park II
Di Su, My Hao, Hung Yen, Viet Nam
PHONE: +84-(0)221-3-589701 • FAX: +84-(0)221-3-589708

SANKYO WORKS (THAILAND) CO., LTD.

9/31 Moo 5, Phaholyotin Road, Klongnueng,
Klong Luang, Patumthani 12120 Thailand
PHONE: +66-(0)2-516-5355 • FAX: +66-(0)2-068-0931
E-mail: sales@sankyo-works.co.th

Contact us

Mon-Fri AM8:30-12:00 PM13:00-17:30 UTC + 09:00 (JST) (Except public holidays and company holidays)

■ **Head Office**
(International department) 3-37-3 Tabatashinmachi, Kita-ku, Tokyo, Japan 114-8538
PHONE: +81-(0)3-3800-3330
FAX: +81-(0)3-3800-3380
E-MAIL: overseas@sankyo-seisakusho.co.jp

■ **TAIWAN**
No.21, Ln.152, Jianxing Rd., Sanhe Vil., Daya Dist., Taichung City 42876, Taiwan (R.O.C.)
PHONE: +886-(0)4-2359-4048
FAX: +886-(0)4-2359-4720
E-MAIL: tw-sales@rollerdrive.com



<http://www.sankyo-seisakusho.co.jp>

* Product specifications may be changed without prior notice. Before ordering, please contact our sales department.
All patent rights and copyrights for parts of mechanisms described in this catalog and for trademarks, images, drawings etc. belong to Sankyo Seisakusho Co.
"RollerDrive" is a registered trademark of Sankyo Seisakusho Co. in Japan.

Dealers