




	Model	Peak current (A)	Rated current(A)	Voltage(V)	Matched BLDC Motor	RS485	Displayer	Speed regulation by knob or inner potentiometer	Digital signal speed regulation	External analog speed regulation	Multistage speed	Dimension(mm)
Low voltage input	BLD70B	6	3	VDC12-30	70W or lower			√	√	√		56.5*96*20
	BLD70R	6	3	VDC12-30	70W or lower	√		√	√	√		56.5*96*20
	BLD-120A	16	8	VDC12-30	125w or lower			√	√	√		60*96*24.5
	BLD120R	16	8	VDC12-30	125w or lower	√		√	√	√		60*96*24.5
	SH-D08R	10	8	VDC20-50	220w or lower	√	√	√	√	√	√	116*67*28
	SD-D120LRD	16	8	VDC48	120W or lower	√	√	√	√	√	√	100*60*102
	SE-200	7	/	VDC48	200W or lower		√	√	√	√		60*102*90
	BLD-300B	15	/	VDC12-56	300w or lower			√	√	√		80*143*33
	BLD-300R	20.6	/	VDC15-62	300w or lower	√		√	√	√		143*90.1*32.5
	BLD-750	45	25	VDC18-50	750w or lower			√	√	√		97*151*48
BLD1500RA	82	/	VDC20-50	1500w or lower	√		√	√	√		200*78*142	
110VAC or 220VAC input	SEH120R	1.8	/	VAC120-250	120W or lower	√	√	√	√	√		52*60.5*162
	SD-D120HRD	1.8	/	VAC110-220	120W or lower	√	√	√	√	√	√	60*90*102
	SA-D120HD	1.8	/	VAC110-220	120W or lower		√	√	√	√	√	60*90*102
	EH200A	4	2	VAC110-220	200W or lower			√				53.5*90*97.3
	EHD200A	4	2	VAC110-220	200W or lower		√	√	√			53.5*90*97.3
	BLDH400R	5.5	/	VAC110-250	400w or lower	√		√	√	√		151*86*52.5
	SEH400R	6	/	VAC120-250	400w or lower	√	√	√	√	√		161.9*60.5*102.5
	BLDH750	8	4.2	VAC185-265	750w or lower			√	√	√		65*170*97
	BLDH750R	9	/	VAC110-250	750w or lower	√		√	√	√		170*65*97
	SEH750R	12	/	VAC120-250	750w or lower	√	√	√	√	√		161.9*60.5*102.5
BLDH1500A	12	8	VAC185-265	1500w or lower	√		√	√	√		147*203*78	
We provide OEM and ODM service according to the customers' requirement												

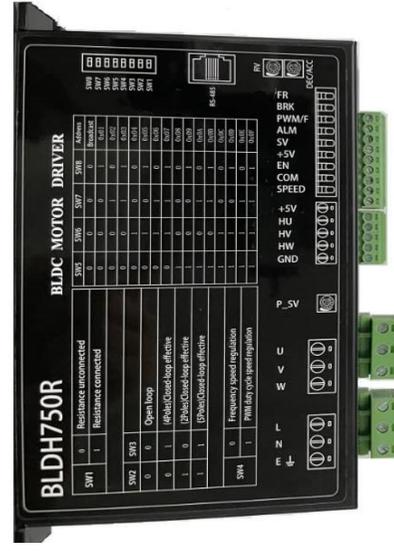

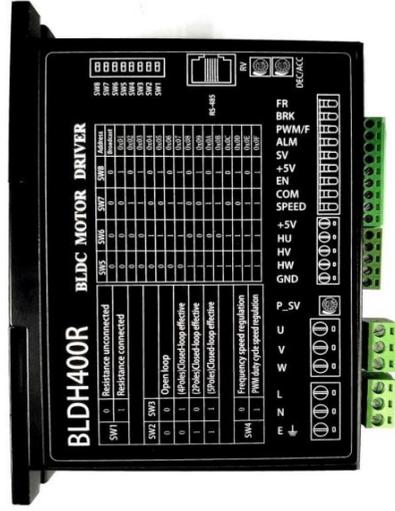

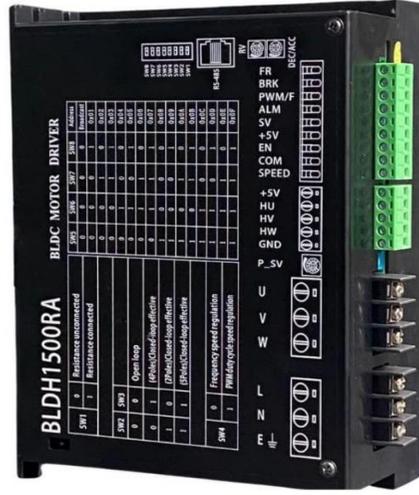

SE-200



SEH120R  
SEH400R  
SEH750R



SD-D120HRD



EH200A



SA-D120HD



<https://ican-motor.com>  
Email: [inquiry@ican-tech.com](mailto:inquiry@ican-tech.com)