





- Closed-loop control, system will not lose steps up to the motors maximum torque
- more torque and faster speed
- Faster response
- Reduced heating of motor and more efficiency
- Zero-speed stability
- Smooth motion and super low motor noise
- No Tuning required
- The System is always stable
- Lower cost compared to servo systems

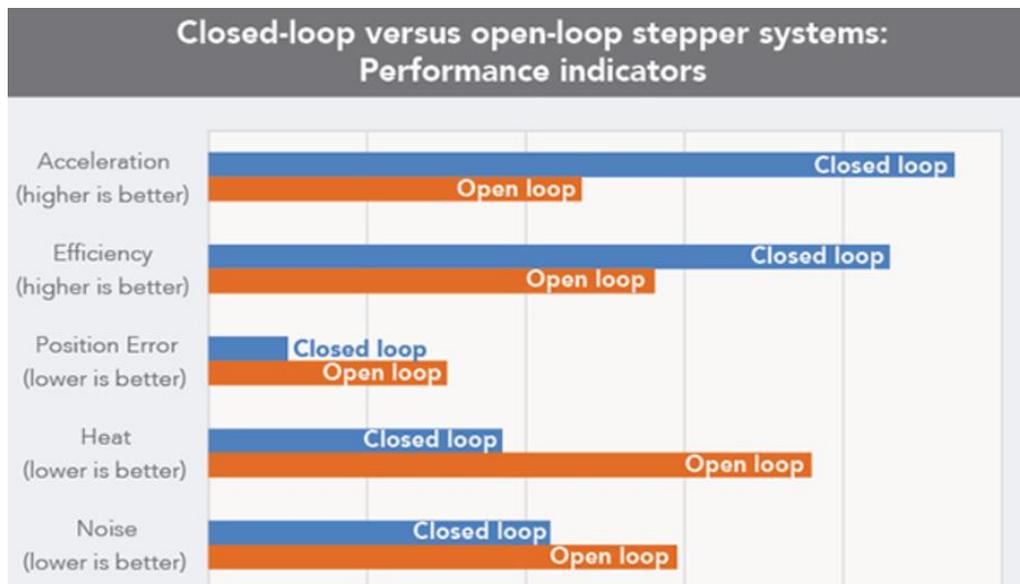


Model	Step Angel (degree)	Holding Torque(N M)	Phase Current ( A)	Motor length L(mm)	Matched driver	Flange size
SM4201A-1000AO	1.8	0.19	1.2	54	SS42	42mm
SM4202A-1000AO	1.8	0.35	1.2	60	SS42	42mm
SM4203A-1000AO	1.8	0.46	1.2	66.5	SS42	42mm
SM4204A-1000AO	1.8	0.68	1.5	80	SS42	42mm
SM5701A-1000AO	1.8	0.6	3	59	SS57	57mm
SM5702A-1000AO	1.8	1.2	4.2	74	SS57	57mm
SM5703A-1000AO	1.8	2.2	4.2	94	SS57	57mm
SM5704A-1000AO	1.8	3	4.2	116	SS57	57mm
SM8601A-1000AO	1.8	3.4	6.0	88	SS86	86mm
SM8602A-1000AO	1.8	4.5	6.0	100	SS86	86mm
SM8603A-1000AO	1.8	8.5	6.0	138	SS86	86mm
SM8604A-1000AO	1.8	12	7.0	176	SS86	86mm


## SM4201A-1000AO

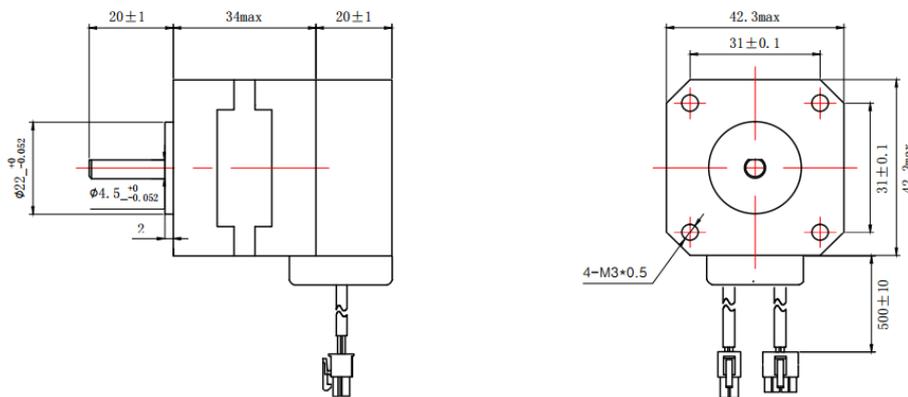


## SM4202A-1000AO

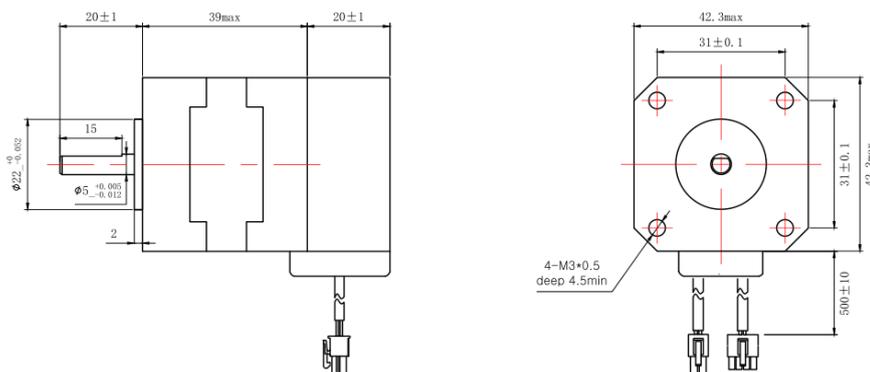


## SM4203A-1000AO

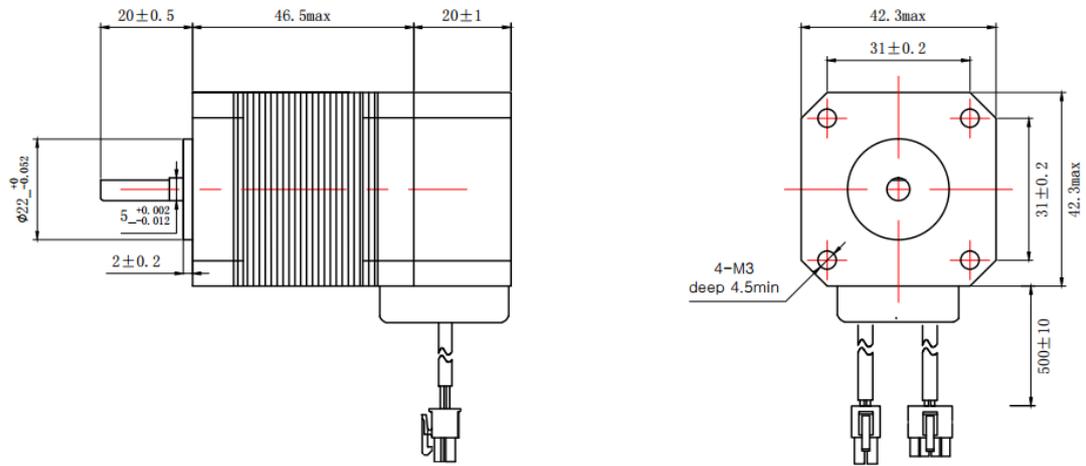


## SM4204A-1000AO

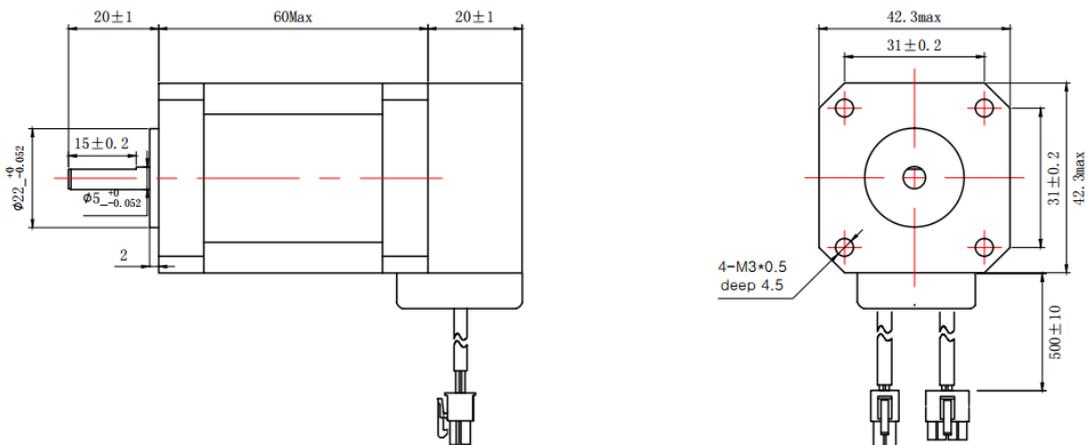


## SM5701A-1000AO

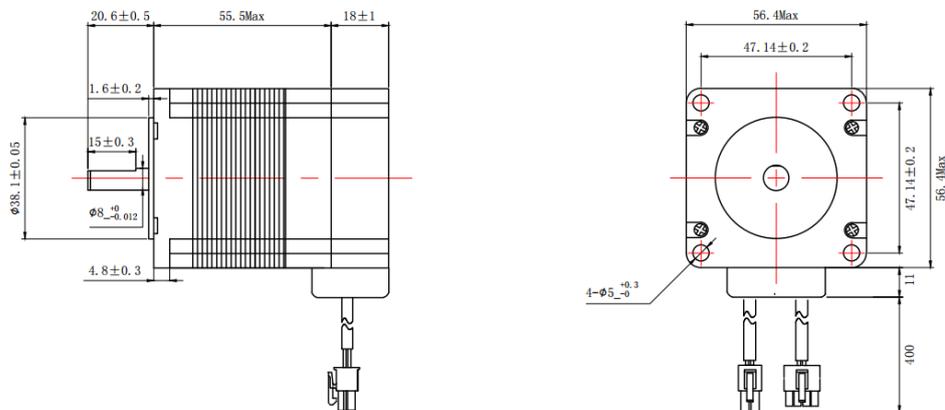


## SM5702A-1000AO

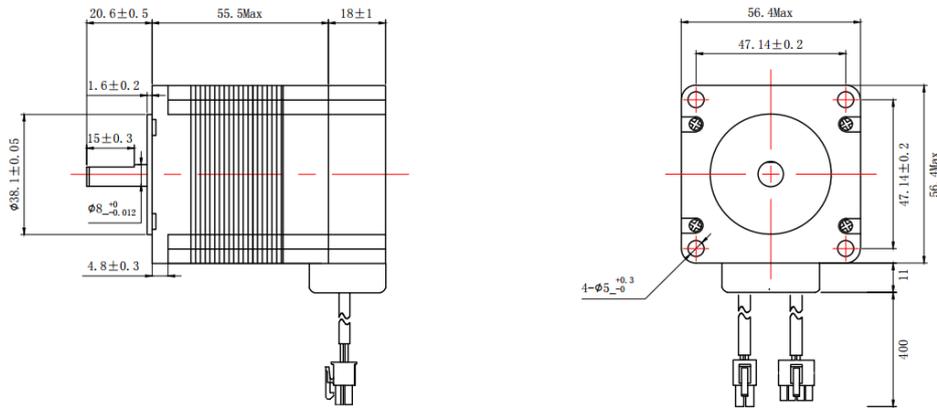


## SM5703A-1000AO

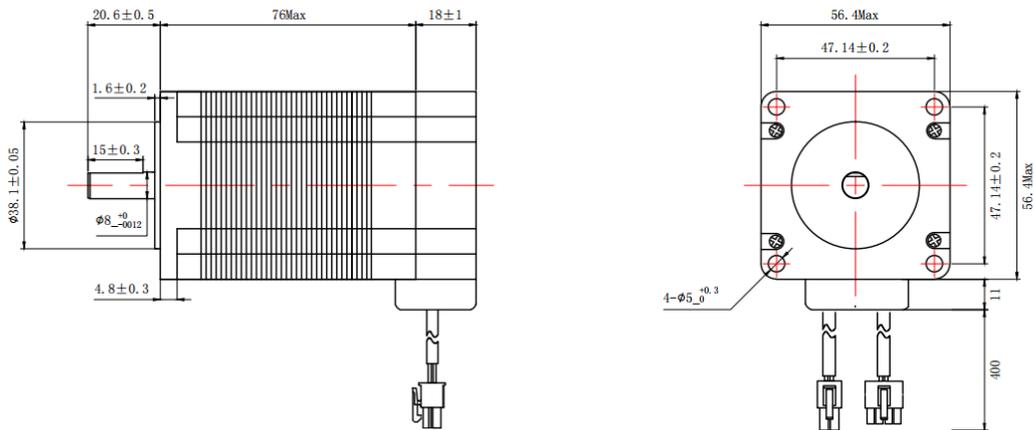


### SM8602A-1000AO

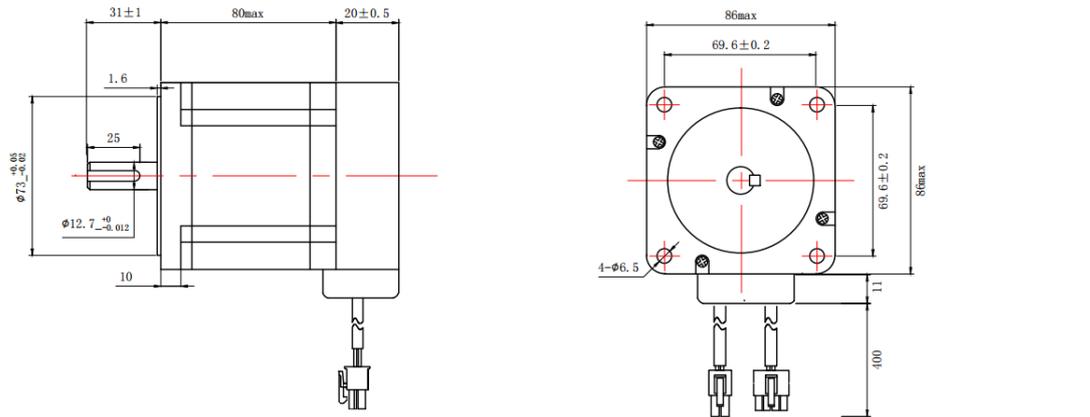

### SM8603A-1000AO

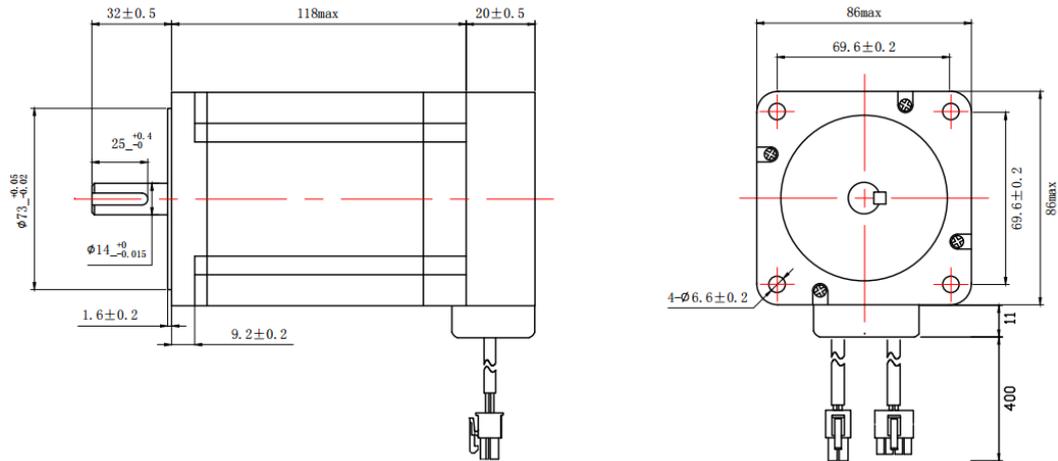

### SM8604A-1000AO

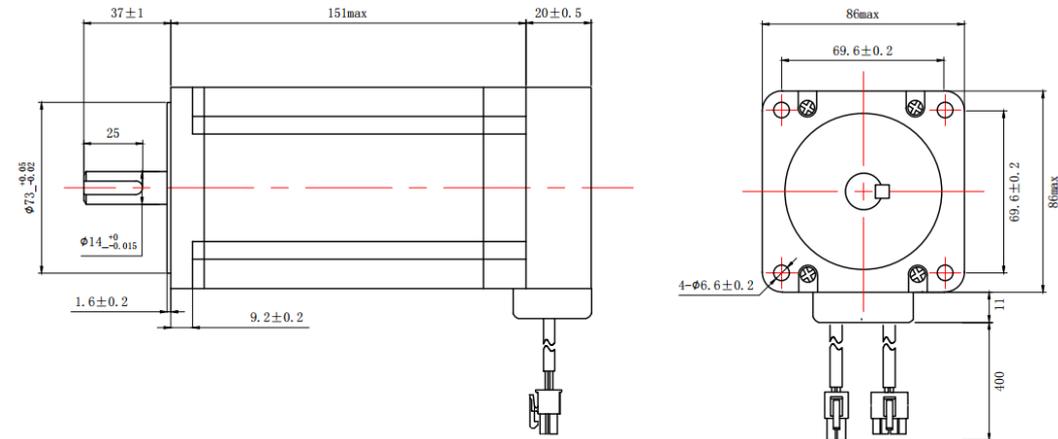

Youtube: <https://www.youtube.com/channel/UCKolfpvNO63VI9rh388yngn>

Facebook: <https://www.facebook.com/DGICANTECH>